



Oct.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

ELV, RoHS COMPLIANT

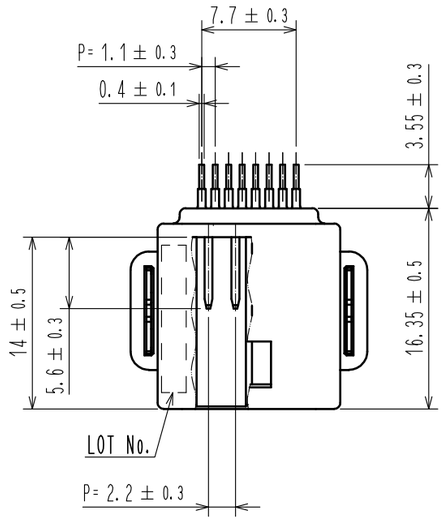


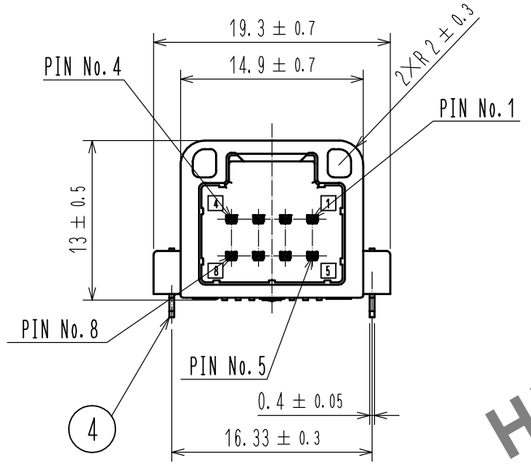

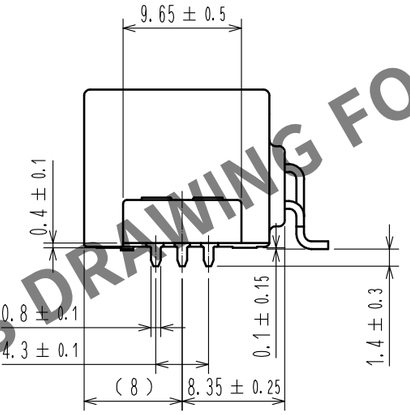

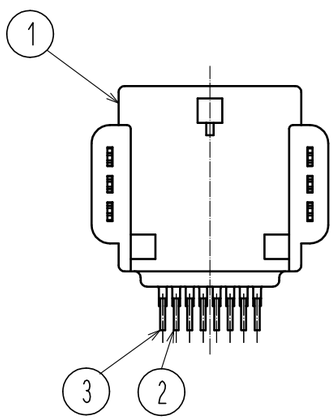


PIN ASSIGNMENT
4 8 3 7 2 6 1 5

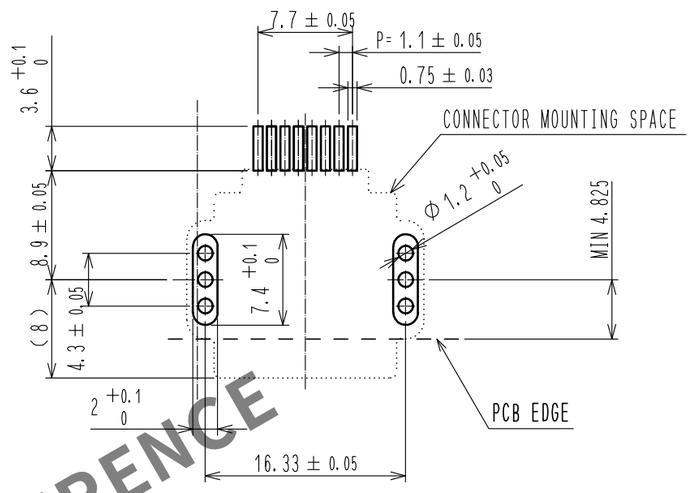

RECOMMANDED PCB PATTERN

HRS DRAWING FOR REFERENCE

NOTE1. RECOMMENDED TEMPERATURE PROFILE FOR REFLOW
(REFER TO RIGHT FIG.)
USED REFLOW SYSTEM
: IR IN THE AIR OR NITROGEN
NO. OF CYCLES : 2 MAX
PEAK : 250℃
OVER 230℃ : 20~40s
PREHEAT : 150~180℃
60~120s
2. TEMPERATURE FOR SOLDERING IRON
:280~300℃ WITHIN 2s
3. COPLANARITY SHALL BE 0.1mm MAX.
4. RECOMMENDED PCB THICKNESS IS 1.6mm
5. RECOMMENDED SOLDER THICKNESS IS 0.15mm.

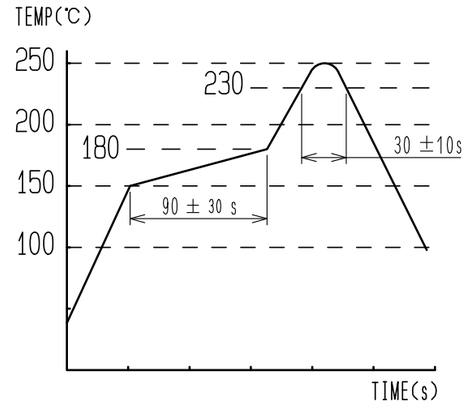

NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
3	BRASS	TIN PLATED	6	PET	
2	BRASS	TIN PLATED	5	PS	
1	PA	BLACK	4	BRASS	TIN PLATED

UNITS	SCALE		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	2 : 1	△1	1	DIS-T-00006626	DONGCHAN KIM	HH. TSUKUMO	20200902


HIROSE ELECTRIC CO., LTD.

APPROVED	AR. SHIRAI	20180601
CHECKED	HS. OZAWA	20180601
DESIGNED	YT. HAYAKAWA	20180601
DRAWN	YT. HAYAKAWA	20180601


DRAWING NO.	EDC-169254-10-00
PART NO.	GT25H2-8DP-2.2H(10)
CODE NO.	CL775-0047-4-10 △1 1/2

Oct.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

PACKAGING SPECIFICATION

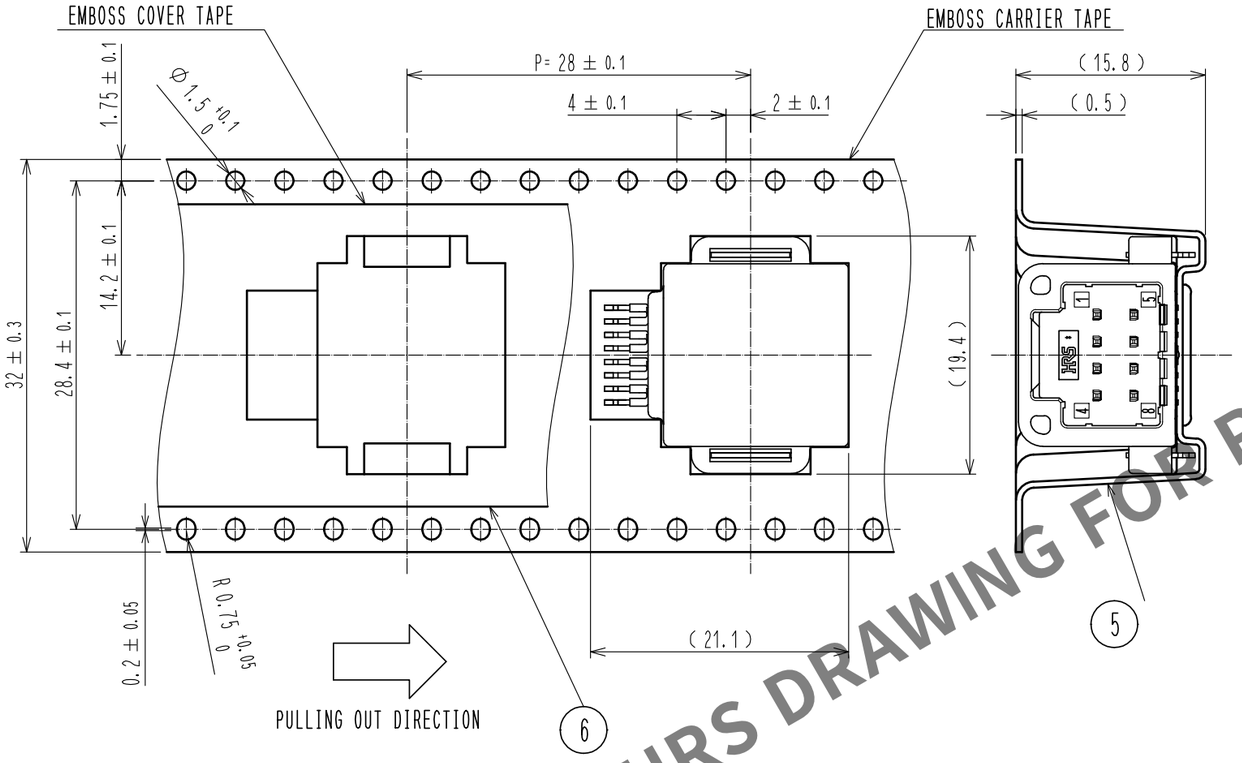


⚠1 REEL DIMENSION (FREE)

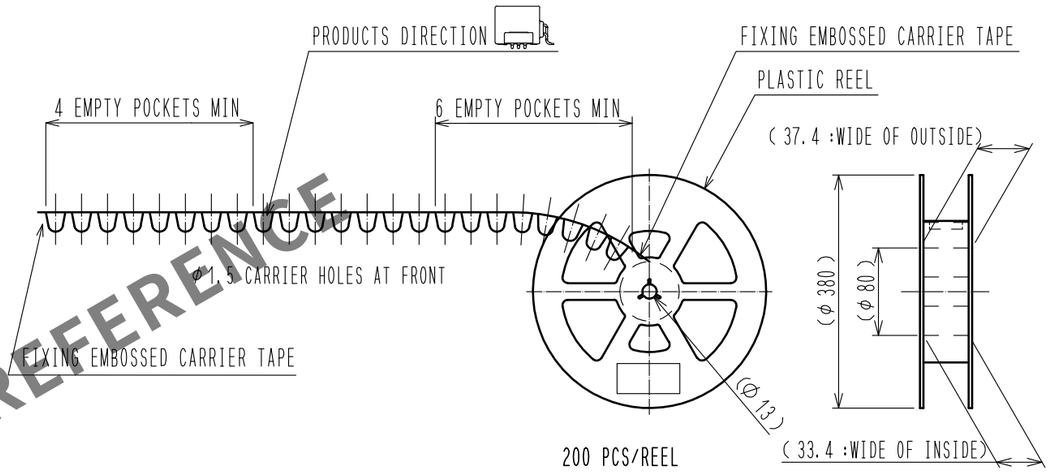

HRS DRAWING FOR REFERENCE

CARDBOARD DIMENSION(FREE)



BOX SIZE
W=(405)(mm)
D=(405)(mm)
H=(39) (mm)

1REEL/BOX

HRS	DRAWING NO.	EDC-169254-10-00
	PART NO.	GT25H2-8DP-2.2H(10)
	CODE NO.	CL775-0047-4-10 ⚠1 2/2

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Hirose Electric:

DF62C-4S-2.2C FX18-60S-0.8SH FX8-120S-SV(22) GT8E-6S-HU ZE05H-12DP-2H BM29B0.6-4DS/2-0.35V(51) DF33C-4S-3.3C DF40C-50DP-0.4V(51) ZE05H-4P-2V(A) ZE064W-8DP-HU/R(A) ZH05-20DP-HU(B) RM15TP-2PA(81) FH35C-19S-0.3SHW(50) FX18-80S-0.8SH DF19A-3032SCFA(41) DF65-4P-1.7V(21) FH41-30S-0.5SH(05) FH41-50S-0.5SH(28) ZE05-24DP-2H DF22A-1416SCFA DF59M-2224PCF FH72-21S-0.3SHW RM12BRD-2PH(81) DF17(3.0)-40DS-0.5V(57) DF36A-25P-SHL HDE-CTH(10) RM15TRH-10PH(81) DF11-16DP-2DSA(24) DF52-4P-0.8C DF57AH-5S-1.2C