


REV.	DESCRIPTION	DATE
A	RELEASE	

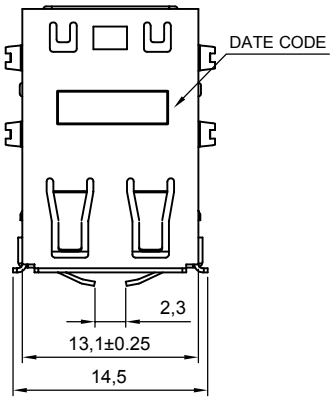

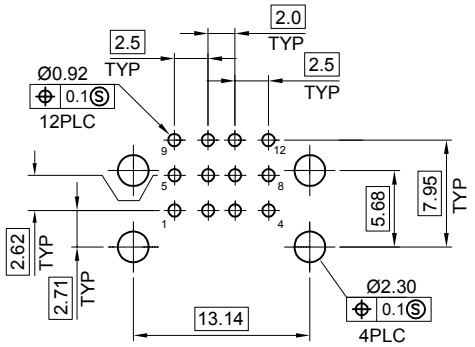


RECOMMENDED P.C.B LAYOUT


TOLERANCE: ±0.05

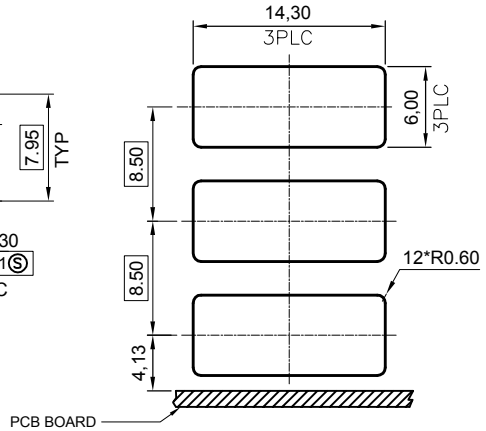


MOUNTING PANEL CUTOUT

NOTES:
1. MATERIAL:
 1.1 HOUSING:PA6T+30% G/F,COLOR:BLACK, UL94V-0;
 1.2 CONTACTS: PHOSPHOR BRONZE
 1.3 SHELL :PHOSPHOR BRONZE OR SK7
 1.4 ISOLATED:PHOSPHOR BRONZE OR SK7
 1.5 REAR SHELL :SPCC
2. FINISH:
 2.1 CONTACT:
  GOLD FLASH PLATING ON CONTACT AREA.
  100u" MIN. BRIGHT-TIN PLATING ON SOLDER TAIL AREA,50u" MIN. NICKEL UNDERPLATING OVERALL,
 2.2 SHELL:
  100u" MIN. NICKEL UNDERPLATNG OVERALL .
 2.3 ISOLATED:SHELL: 100u" MIN. NICKEL PLATED
 2.4 REAR SHELL:100u" MIN. NICKEL PLATED.
3. ELECTRICAL CHARACTERISTICS:
 CURRENT RATING: 0.5Amper Maximum
 VOLTAGE: 30V AC.
 CONTACT RETENTION FORCE:0.7KGFMINIMUM.
 CONTACT RESISTANCE: 30 MILLIOHMS MAXIMUM.
 INSULATION RESISTANCE: 1000MEGOHMS MINIMUM.
 DIELECTRIC WITHSTANDING VOLTAGE: 750V AC AT SEE LEVEL.
 TEMPERATURE: -55°C~85°C .

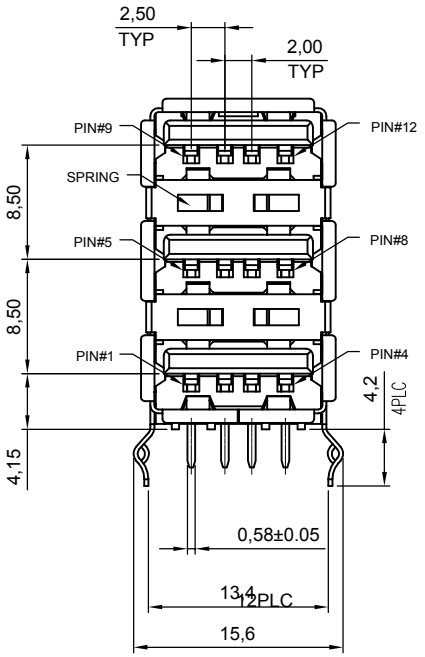

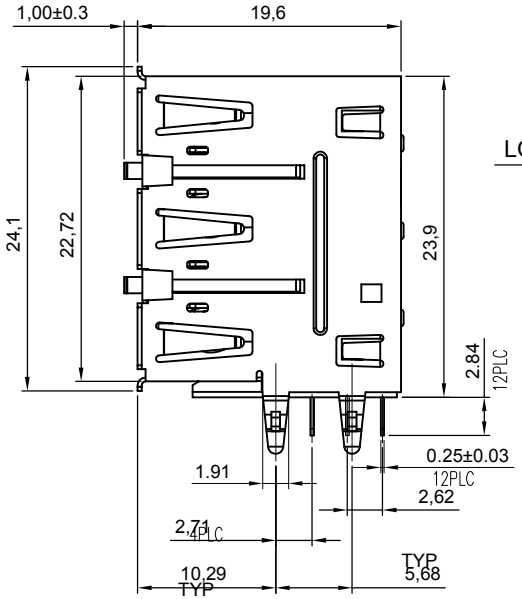

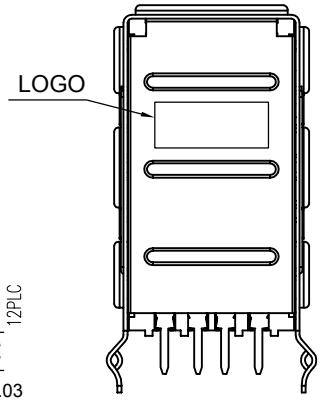

UNLESS TOLERANCE		DRAW BY		CnC Tech,LLC	
GENERAL	ANGLE	DESIGN BY			
X. ± 0.30	X.° ± 3.0°	CHECK BY		Part NO.	
.X ± 0.20	.X° ± 2.0°	APPROVE BY		1001-007-01020	
.XX ± 0.15	.XX° ± 1.0°				
.XXX± 0.08	.XXX°± 0.5°	SCALE	SHEET / UNIT	DRW NO:	REV: A
		1:1	1/1 MM		

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

CNC Technology:

1007-20-1-2000-007-1-TS 3135-18-1-0500-003-1-TS 3521-08-0101-99 3522-20-0100-99
512-26-8800-BL-0007F 1002-003-02000 10064-30-1-0500-007-1-TS 102-1030-BE-00100
1569-18-1-0500-008-1-TS 520-26-4400-SV-0010F CNC-SAE-16-183-002 2000-1-2-41-00-BK
3135-18-1-0500-005-1-TS 911S-2-5-00700-PL 1569-22-1-0500-006-1-TS 1569-22-1-0500-007-1-TS
51025-10-0100-01 523-26-6600-SV-0010F 1007-18-1-2000-007-1-TD 3239-16-1-0500-005-1-TS
521-26-04-SV-014F 1332-22-1-0500-001-1-TS 3122-18-1-0500-002-1-TS 3132-22-1-0500-001-1-TS
3239-20-1-0500-002-1-TS 521-26-04-SV-005F 302-28-26-GR-0100F 3132-24-1-0500-002-1-TS
3221-26-0300-00 743-60010-00200