


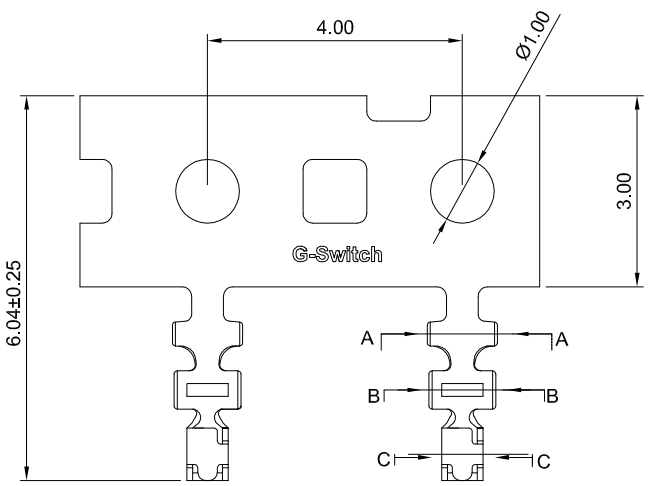


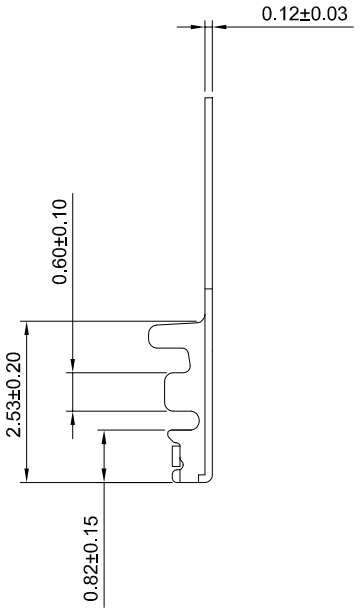

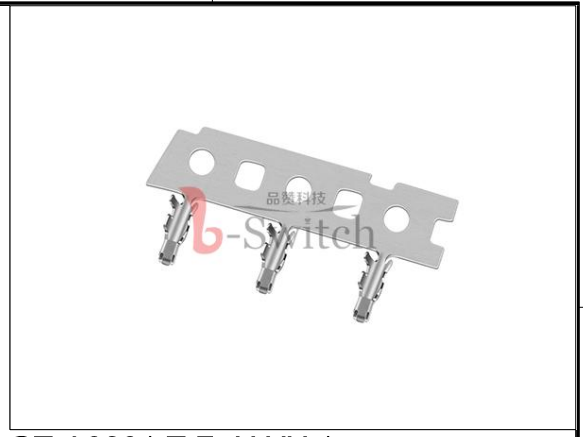


GT-A0801 T F -X XX 1


- G-Switch
- Series No
- Connector: T-Terminal
- F-Female
- Metal: P-Phosphor Bronze
- Terminal Plating: BT-Bright Tin



SECTION:A-A



SECTION:B-B



SECTION:C-C

G-Switch Specification:

1. Current rated: 0.8-2.5A AC/DC
2. Voltage rating: 100V AC/DC
3. Withstanding voltage: 300V AC
4. Contact resistance: 20mΩ max.
5. Insulation resistance: 100MΩ min
6. Durability cycle: 50Cycles
7. Removal force: 1.0kgf/Pin min
8. Operating temperature range: -40°C ~ +85°C

Part NO	Material	Plating	Wire Size	Insulation O.D	Reel/PCS
GT-A0801TF-PBT1	Phosphor bronze	Bright Tin	AWG#28~#32	0.60mm(Max)	30000

Pb Process Capable | RoHS Compliant EU RoHS Standards

SCALE: 1:1	UNIT: mm	Title: Terminal 1.00mm Pitch HRS Crimp Style	
SIZE: A4		Molde Code: GT-A0801TF-XXX1	

Unless otherwise General Tolerance:

X	±0.40
X.x	±0.30
X.xx	±0.20
X°	±5°
X.x°	±3°

DRAWN	CHECKED	APPROVED	DATE
Hu	Hu	Chen	2021.10.20

品赞科技 b-Switch ® www.dg-switch.com

REV: A0 SHEET: 1/1

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

G-Switch:

GT-F0502SR20-22SMT01 GT-BTR20008-0460A-004A GT-F1007SR20-07S0101 GT-F1010SR20-07SMT01 PS-8055SVA-6PNA GT-F0503SR20-30S1101 GT-A1002WRS-112SBT01 GT-A2001HM-106W01 GT-F0502SR20-52SMT01 GT-F0512SR18-04S0101 GT-F1009DV44-25BBT01 GT-F0501SR10-08S1101 GT-TC155A-H0060-L50 SS-23H02-G080 GT-A1257WVS-103SBT01 GT-F0502SR20-04SMT01 GT-F0502SR20-23SMT01 GT-F1009SV44-17BBT01 ST-0275S00-082-182 GT-F1009SV44-30BBT01 GT-F1010SR20-30SMT01 GT-TC194B-H0055-L1 PJ-2013-L6S GT-A2501WVS-103SBT01 GT-F1009SR28-18BBT01 GT-F1007SR20-30S0101 GT-USB-7100A DC-S001B-D013-3.5A GT-A2001WVS-110SBT01 GT-BTP16006-0180B-014B