This document contains proprietary information and such informationmay not be disclosed to others for any purposes,
not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	———	H. wei	19/03/17	19/03/17

1 Electrical


1.1 Impedance:	50Ω
1.2 Frequency:	DC～4GHz
1.3 Working voltage:	≤250V
1.4 Insulation resistance:	≥1000MΩ
1.5 Dielectric strength:	750V
1.6 Center Contact resistance:	≤ 6mΩ
1.7 Outer contact resistance:	≤ 1mΩ

2 Environmental&Mechanical

2.1 Temperature range	-45℃～125℃
2.2 RoHs Compliant	
2.3 Durability	500 cycles

3 Materials&plating

3.1 Inner Contact:	Brass, gold plating
3.1 Outer Contact:	Brass, gold plated
3.3 Insulators:	Teflon

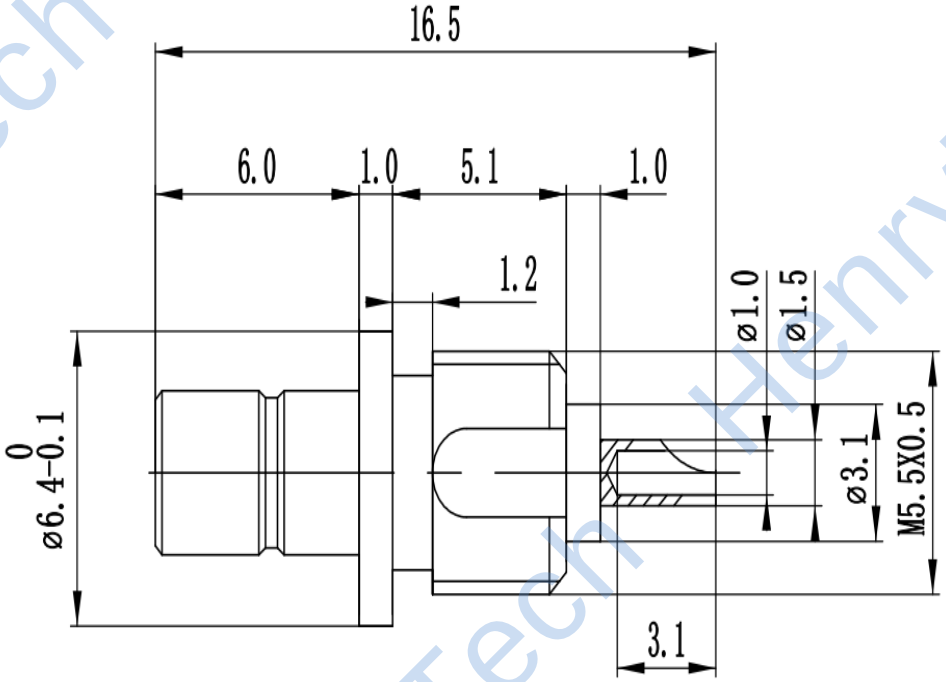

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: H. wei 19/03/17	TITLE: RF Coaxial Connector SMB Male Bulkhead conn. Terminal				
ENGINEER: L. yu 19/03/17					
APPROVED: W. yi 19/03/17					
TOLERANCES UNLESS OTHERWISE SPEFICIED X ±0.50 .X ±0.20 .XX ±0.10 ANGLES ±1°		HenryTech			
	PART NO: HL-SMB-JYD3	DIMENSION IN MILLIMETERS (mm)			
		SIZE: A4	SCALE: N/A	SHEET: 1/1	REV: A

HenryTech

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

HenryTech:

HL-SMAMF-2-18-15dB H3-MABA-007871-CT1A40 H3-TC1-1TG2+ HG-SCN-2-22+ HL-SMA/SMB-KK HL-N-KKC HL-SMA-KHD4 HLCC2250G H3-MABA-011085 HN-LP7-0.5-1.27(9.4-2.8) HT-LFCG-530+ HX-N-JK HL-SMB-K3DY HT-BFHKI-1572+ HT-HFCN-3800+ HT-LFCN-3800+ HX-SMA/SMP-JK H3-MAPD-008109-C30040 HG-SCN-2-65+ HN-DC2016-0.5(12-4.6)M HT-SCA-4-10+ HX-1.85-JJ HT-LFCN-400+ HL-MCX-KE-02 HL-SSMA-KHD-1 HT-LFCG-1700+ H2SYDC-20-62HP+ H3-MABA-010551-CF1071 HT-HFCN-2700+ HT-QCN-19+