
Data Sheet

Coaxial Cable Connector
11_SMA-50-3-100/111_N

Description

Straight cable plug

Interface standards
SUHNER-SMA-26.5GHz

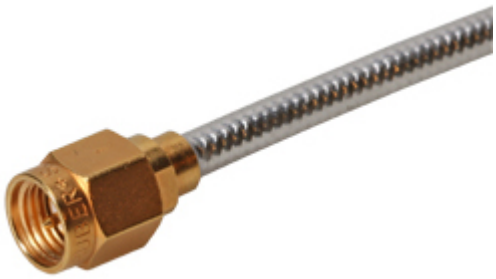

Technical Data

Electrical Data

Impedance	50 Ω
Interface frequency max.	26.5 GHz

Mechanical Data

Centre contact	soldered
Outer contact	soldered
Weight	0.0028 kg

Environmental Data

Operating temperature	-65 °C to 165 °C
2011/65/EU (RoHS - including 2015/863 and 2017/2102)	compliant

Material Data

Piece Parts	Material	Surface Plating
Centre contact	Copper Beryllium Alloy	Gold Plating (Nickel underplated)
Outer contact	Copper Beryllium Alloy	Gold Plating (Nickel underplated)
Body	Copper Beryllium Alloy	Gold Plating (Nickel underplated)
Insulator	PFA / PTFE	
Coupling nut	Bronze	Gold Plating (Nickel underplated)
Gasket	VMQ (Silicone rubber)	

Related Documents

Catalogue drawing	DCA-00007238
Assembly instruction	DOC-0000181590

Ordering Information

Bulk 100 pcs package	11_SMA-50-3-100/111_NH
Single package	11_SMA-50-3-100/111_NE

Additional Information

Suitable cables	EZ_141_TP_M17, SUCOFORM_141, MULTIFLEX_141

Waiver: Fact and figures herein are for information only and do not represent any warranty of any kind.

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Huber+Suhner:

1399.31.0020 22511964 85201112 12012090 16_MMCX-50-2-4/111_OH 6620_SMA-50-2/199_NE G032D/BNCm/BNCm/1000 G032D/Nm/SMAm/1000 G_03130_HT-01 84118385 MINIBEND R-12 PCRS_LCMX_LCMX_O421T_30.0_LL 1399.17.0210 24_SMA-50-2-15/111_NH 84093961 11_SMC-50-2-10/111_NE 11_TNC-50-3-116/133_NE 12535682 1399.17.0231 6806.19.A MINIBEND R-10 RG_196_A/U 23000457 33_PC24-SK-50-2/199_NE MINIBEND R-8 11MMBXEF31616MMBX/300 23002145 6601_PC185-50-1/199_NE Minibend L-10 RADOX 125 0.75 MMÂ² RED