1500 Series

600 Volts AC/DC (UL/CSA)



1508 STD



1508 SC

Specifications:

- Base, General Purpose Phenolic, 150ºC (UL RTI)
- Connector, Brass, Nickel Plated
- Phil-Slot Screws standard (slotted screws also available), Brass, Nickel Plated, 10-32
- Current rated up to 30 Amps with unprepared wire, #10-22 AWG Copper
- Current rated up to 75 Amps when wired with crimp type ring, spade or fork terminal
- 5/8" (.625") Line To Line Spacing
- UL Recognized File No. XCFR2.E62806
- CSA Certified File No. LR19766
- CE - 1000 Volts
- RoHS Compliant

# of Poles	Catalog #							Dimensions A	Dimensions B	Clear Cover	White Cover
2	1502 MCJ	1502 STD	1502 DJ	1502 DJSV	1502 ST	1502 SC	1502 H	2.00	1.62	CC 1502	CW 1502
4	1504 MCJ	1504 STD	1504 DJ	1504 DJSV	1504 ST	1504 SC	1504 H	3.25	2.88	CC 1504	CW 1504
6	1506 MCJ	1506 STD	1506 DJ	1506 DJSV	1506 ST	1506 SC	1506 H	4.50	4.12	CC 1506	CW 1506
8	1508 MCJ	1508 STD	1508 DJ	1508 DJSV	1508 ST	1508 SC	1508 H	5.75	5.38	CC 1508	CW 1508
12	1512 MCJ	1512 STD	1512 DJ	1512 DJSV	1512 ST	1512 SC	1512 H	8.25	7.88	CC 1510	CW 1510

See page 35 for DIN Rail Adapter

mm = dim X 25.4

15XX MCJ



Multiple Circuit Jumper

15XX STD



Standard Connector with Serrations for Anti-Rotation

15XX DJ



Removable Connector with Brass Insert

15XX DJSV



Removable Connector with Brass Insert, Removable Cover

15XX ST*



10-32 Stud, Removable Connector

15XX SC



Short Circuiting Bar with Brass Insert, 4 Shorting Pins per Block

15XX H



Standard Connector with Hinge Cover

For electronic drawings or 2D/3D CAD data, submit request at www.marathonsp.com/drawings.html

* STRC: 10-32 Stud with Riveted Connector

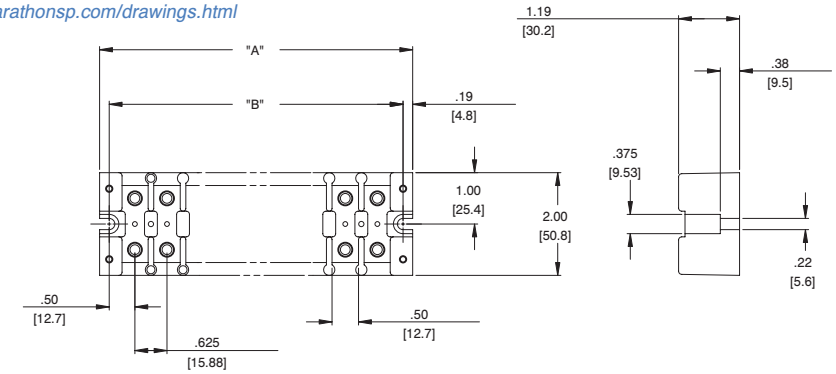

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Marathon Special:

621-RZ-12 110 1104 CHR660 0987-RZ-TC-04 1432563 208 600RJ10 ST723B3802 1322572CH 1343350 1453599 1612 STD J603 HVPB112 1423570 6J60A3B 1413400 1504 STD 1512 STD 6SC30A2C 6T30A3B CH1323 HVPB212 38TB12 600 RJS 09 672GP12 1353703CH 1451301 601 RJ 03