




MAPX	MODIFICATION	DATE

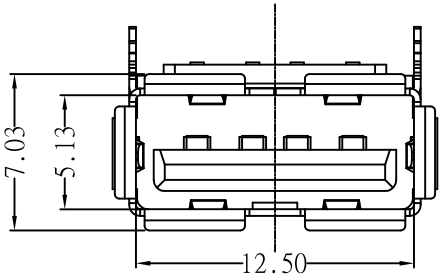





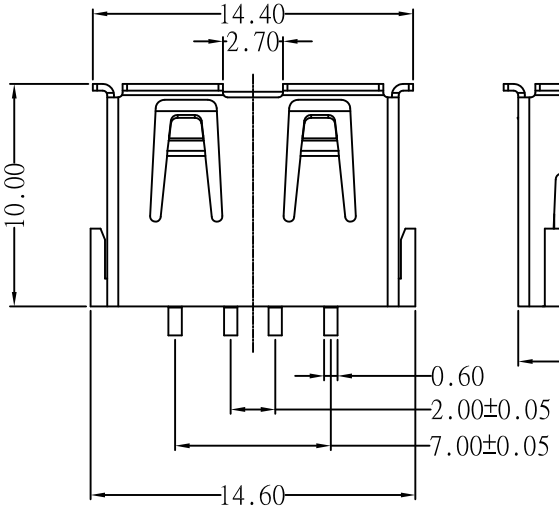



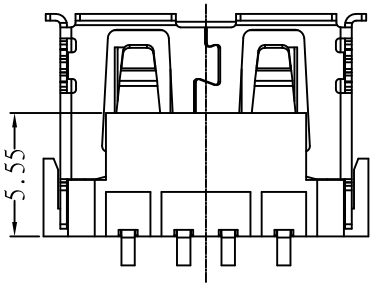



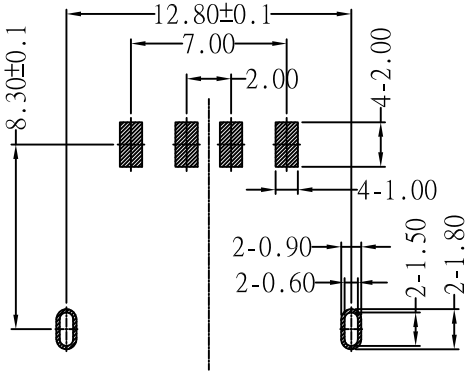

RECOMMENDED P.C.B LAYOUT

Specification:

1.Electrical Characteristics:

Dielectric Withstanding Voltage: AC 500V/1MINUTE.
Insulation Resistance: 1000 MΩ\Min.
Contact Resistance: 30 mΩ\ Max.

2.Mechanical Characteristics:

INSERTION FORCE: 30N(3.06Kgf) MAX
EXTRACTION FORCE: 10~30N(1.02~3.06Kgf)
Durability:1500cycles.EXTRACTION
FORCE:10~30N(1.02~3.06Kgf)

3. Material:

Terminal: C5191/C2680R-EH T=0.25
Plating: Gold 0.76 um Min plating over 1.27 um Min Nickel underplate, 2.54 um Min Sn selective plating on solder tail;
Shell: Bronze, SPCC,H =0.30mm
Plating: Nickel underplate 2.54 um Min;
Housing: PBT PA9T LCP Black White

4.Environmental:

Operating Temperature: 0°C to +85°C.

908-X X X A X XX X X X XX

- 01/02=1U 04=3U 07=15U 08=30U
- 1=氰铜 2=磷铜
- D=90度 Y=180度 S=贴板
- 1=A款6.3 2=A款6.8,
- 01=白色 02=黑色
- 1=PBT 2=LCP 3=PA9T
- A=正向
- 1=铁壳24H 2=铜壳24H
- 5=有边 6=无边 7=有边有缺口
- 1=前两脚 2=后两脚 3=四脚

产品图
PRODUCT CHART DWG

公差一览表 TOLERANCE UNLESS OTHERMSE

X.	±0.30	X.	±5.°
.X	±0.25	.X	±2.°
.XX	±0.15	.XX	±1.°
.XXX	±0.10	.XXX	±0.5°

深圳市精拓金电子有限公司

单位 UNITS	MM	制图 DRAWING	YANG	制图料号 PRODUCT PART NO.	908-171A2022S10100		
比例 SCALE	1:1	审核 CHKD	郭志富	产品名称 PRODUCT NO.	AF10.0A款前两脚有边有缺口铁壳 LCP黑胶6.8SMT		
日期 DATE	2019.11.23	核准 APPD	黄国荣	角法 VIEW		版本 VER	A0

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Jing extension:

920-154A2021Y10110 905-761A2032S10200 906-262A1021D10200 911-221A2021S10100
920-A62A2021S10108 920-C52A2021S10105 907-111A1022D10200 908-351A1011D10100
916-151A1022Y10200 919-162A1012D10400 912-112A1011D10100 920-A62A2021S10104
906-552A1012D10200 906-752B1114D10200 918-318K2023C40005 918-468K2029Y50000
920-C62A2021S10103 904-331B2032S10200 920-A64A2091S101A3 904-232A2031S10100
907-312A1101Y10210 910-151A2021D10100 912-112A2021S10100 912-312A1012D10100
917-B88C201AH70201 918-418K2022Y40011 920-F52A2021S10105 904-232B2032S10100
917-P81A202ES60201 918-415K3028S40000