
SPECIFICATIONS

Model Number: MC24B7X-E2
Part Number: 19041170A

November 23, 2011

Mechanical Drawing:

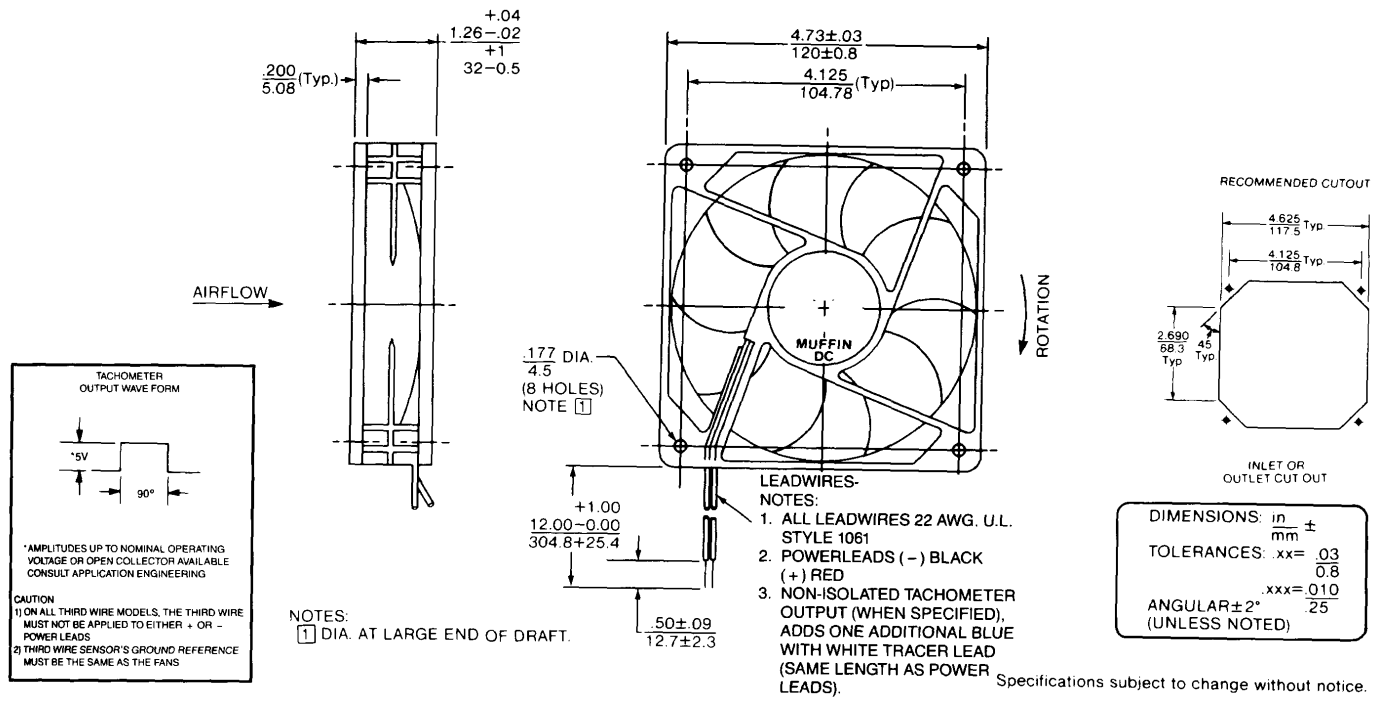

Specifications subject to change without notice.

Motor:

Nominal Voltage	= 24 vdc
Operating Voltage Range	= 12 - 28 vdc
Nominal Running Current	= 0.23 amps
Locked Rotor Current	= 0.83 amps
Running Power	= 5.5 watts
Average Speed	= 3700
Bearings	= Ball
Max Air Flow	= 102 CFM
Acoustic	= 47.8 dBA

Construction:

Venturi: Lexan 500, Black, UL94V-0
Propeller: Polypropylene, Black, UL94V-0

Life Expectancy:

This fan is designed for continuous duty life of 75,000 hours at 40°C

Agency Approvals:

UL

Additional Features:

Brushless DC Motor
Polarity Protected.
Locked Rotor Protection.
Automatic Restart
6-32 inserts on 8 mounting holes
Enviroshield Type 2

Termination:

12” Lead Wires, 22 AWG, UL1061
Red – Power
Black – Return
Blue/White - Tachometer

Tachometer Output:

Output:	5 volt TTL Compatible
I_c:	5mA Typical
Pulse per Revolution:	2
Isolated:	No

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Comair Rotron:

031081 032740 19039306A 476042 19028885A 19028933A 19030622A MD24B5-E2 19039030A 19030616A 19032105A CLE2L2 19020188A 031176 032772 039824 17002001A 17002016A 17002087A 19028868A GDA1238-48BB 19031092A 19039299A 19039646A 17001219A MA2B3 19031842A 17001178A 19030389A 19032183A GL24B7-E2 19039031A 032620 19039671A