
Rocker Switch | **RG1-1A-DC-1-RL**


SWITCH COMPONENTS

Mechanical Dimensions (mm)

Tolerances ±0.3 Unless Otherwise Specified

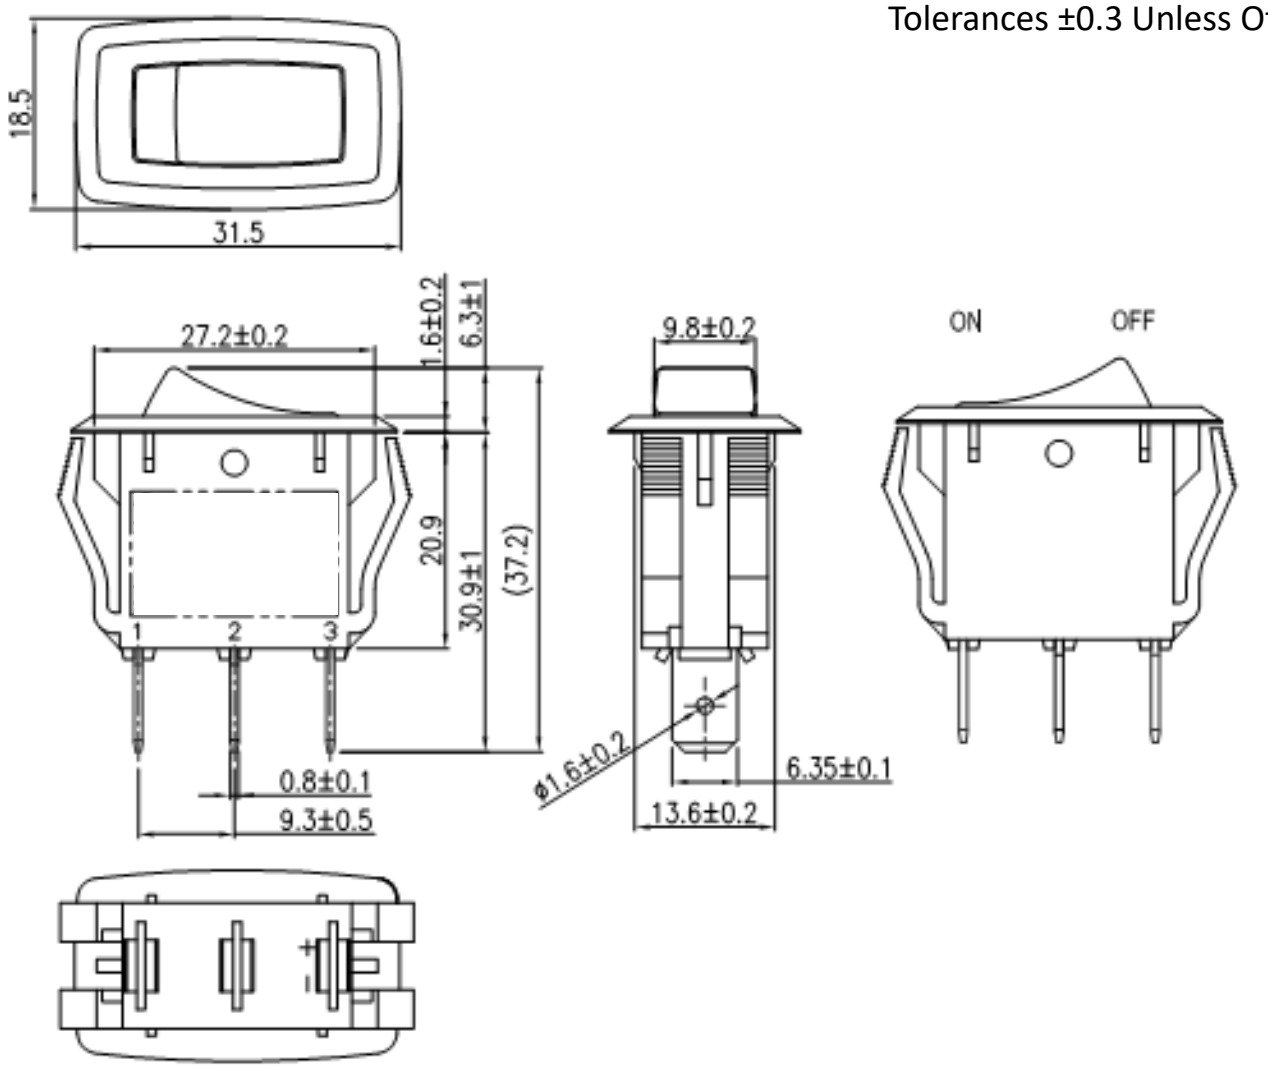


Mounting Hole



Thickness	X	Y
0.75~3	27.6-0.1	13.8+0.1
3~4	27.8-0.1	13.8+0.1
4~5	28.0-0.1	13.8+0.1

Circuit Diagram

3P SPST OFF-ON (LED-D)



R=680 ohm

Electrical Specifications

Rating	16A 12V DC
Contact Resistance	50m ohm Max.
Insulation Resistance	DC 500V 100M ohm Min.
Dielectric Strength	AC 1500V 1 minute
Operation Temperature	-25°C~85°C

Material Specifications

Frame	Black, Nylon #66
Actuator	Red, PC

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Switch Components:

RF3-1A-DC-2-GL SB-1B-DC-3-B RG3-1A-DC-1-B SRC1-1B-DC-1-B SRD2-1G-DC-1-BNN SRD2-2F-DC-1-BNN SRA1-1A-DC-1-NN-2 TA1-1A-DC-4 TB1-2H-DC-6 WR1 RF1-1A-DC-2-B-3 SB-1B-DC-3-R TA2-1A-DC-5 TE1-1F-DC-1-PB TE3-1A-DC-1-AL SRA1-2F-DC-1-NN SRD1-2A-DC-1-BGN TA2-1G-DC-6-O PB-1B-DC-2-RIL RD2-1A-DC-1-AL SC-B SRB1-1G-DC-1-NN SRD2-2F-DC-1-RNN PB-1A-DC-2-RDL TC6-P1-Z TE6-1A-DC-1-UL PB-1A-DC-2-B PD-1E-DC-9-UL RA4-2A-DC-2-AL RC-1A-DC-1-AL