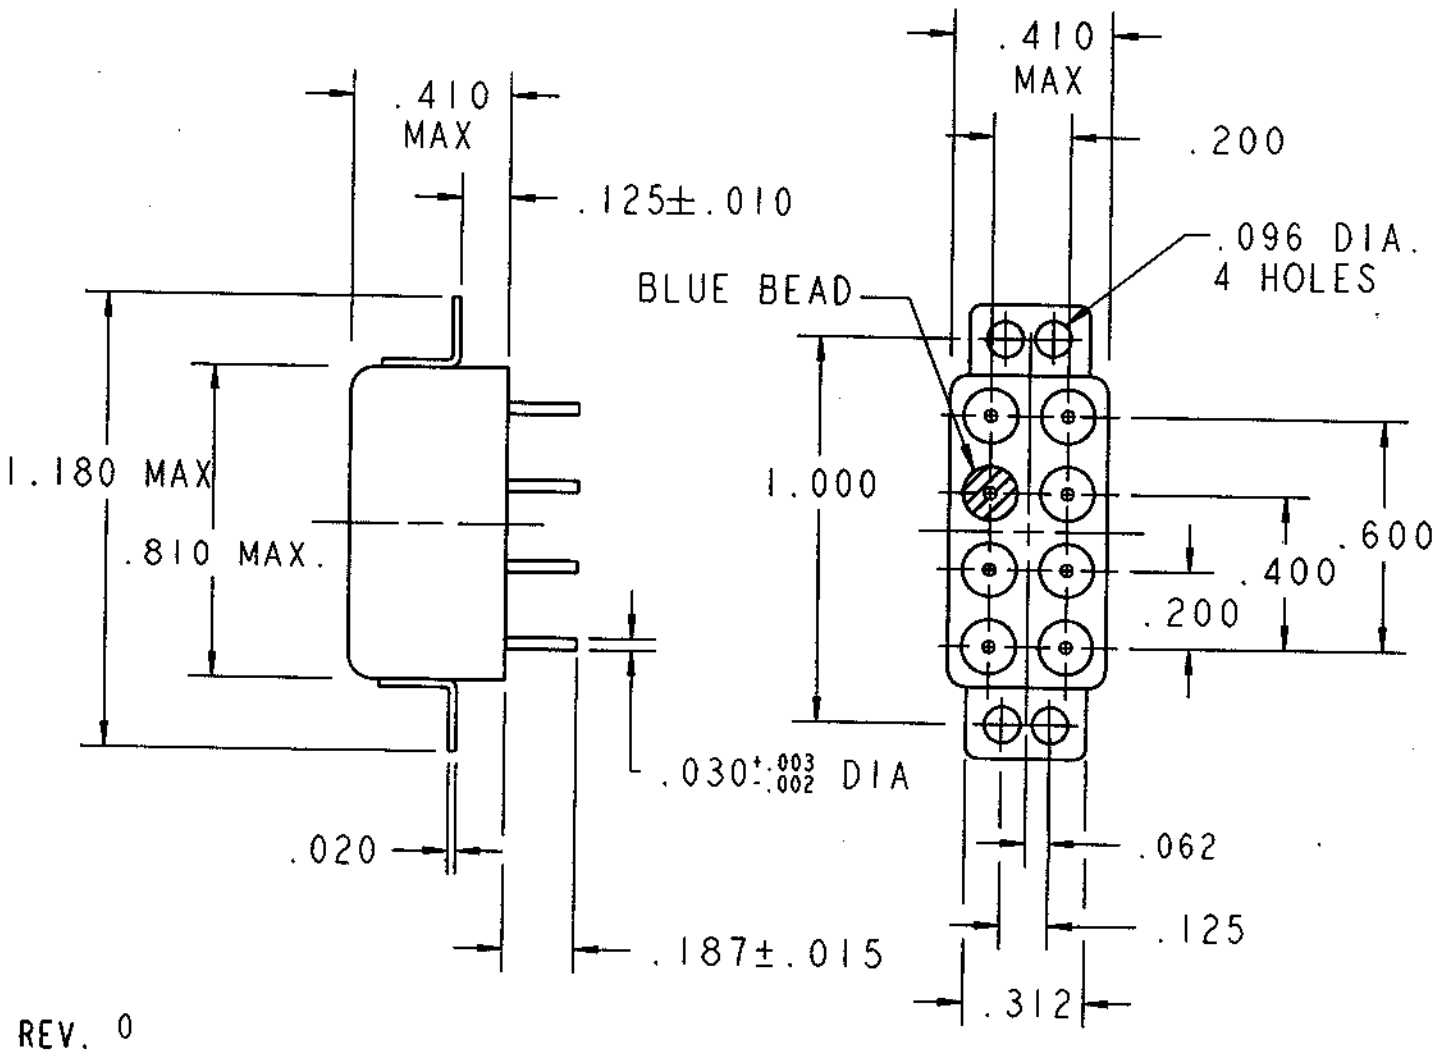


REV. 0
DCO 17483

COIL: @ 25°C


RESISTANCE	160 OHMS ±10%
NOMINAL VOLTAGE	12.0 VDC
MUST OPERATE	6.4 VDC
MUST RELEASE	0.7 VDC

ENVIRONMENT:

VIBRATION 10 Hz TO 3000 Hz @ 20 g's
SHOCK 100 g's 6±1 MS. DURATION
TEMPERATURE -65 °C TO +125 °C

NOTES:

CUSTOMER DATA SHEET

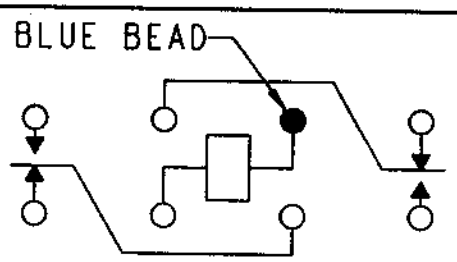

TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO
2A 28 VDC RESISTIVE
100,000 OPERATIONS

DR. DS 1/15/02 CK. TLG 01-15-02

CII Technologies
advanced control electronic solutions

CUST. C.I.I. STD
CUST. NO. _____ REV. _____

"HFW" RELAY

HFW1206G00

F-718 REV. 4

SUPERSEDED
NOT the LATEST
REVISION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity:

HFW1206G00