PCB terminal block - SPTD 1,5/ 3-H-3,5 - 1841500

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://phoenixcontact.com/download)



The figure shows a 10-position version of the product

PCB terminal block, Nominal current: 10 A, Nom. voltage: 200 V, Pitch: 3.5 mm, Number of positions: 3, Connection method: Push-in spring connection, Mounting: Soldering, Conductor/PCB connection direction: 0 °, Color: green

Key Commercial Data

Packing unit	1 pc
Minimum order quantity	100 pc
Weight per Piece (excluding packing)	6.4 g
Custom tariff number	85369010
Country of origin	China

Technical data

Dimensions

Length	18 mm
Pitch	3.5 mm
Dimension a	7 mm
Height	24.2 mm
Length of the solder pin	3.5 mm
Pin dimensions	0,6 x 1,0 mm
Pin spacing	9.35 mm
Hole diameter	1.3 mm

General

Range of articles	SPTD 1,5
Insulating material group	I
Rated surge voltage (III/3)	2.5 kV
Rated surge voltage (III/2)	2.5 kV

PCB terminal block - SPTD 1,5/ 3-H-3,5 - 1841500

Technical data

General

Rated surge voltage (II/2)	2.5 kV
Rated voltage (III/3)	160 V
Rated voltage (III/2)	200 V
Rated voltage (II/2)	400 V
Connection in acc. with standard	EN-VDE
Nominal current I_N	10 A
Nominal cross section	1.5 mm²
Maximum load current	10 A
Insulating material	PA
Solder pin surface	Sn
Inflammability class according to UL 94	V0
Stripping length	8 mm
Number of positions	3

Connection data

Conductor cross section solid min.	0.14 mm²
Conductor cross section solid max.	1.5 mm²
Conductor cross section flexible min.	0.14 mm²
Conductor cross section flexible max.	1.5 mm²
Conductor cross section flexible, with ferrule without plastic sleeve min.	0.2 mm²
Conductor cross section flexible, with ferrule without plastic sleeve max.	1.5 mm²
Conductor cross section flexible, with ferrule with plastic sleeve min.	0.2 mm²
Conductor cross section flexible, with ferrule with plastic sleeve max.	0.75 mm²
Conductor cross section AWG min.	26
Conductor cross section AWG max.	16

Classifications

eCl@ss

eCl@ss 5.1	27141190
eCl@ss 6.0	27261101
eCl@ss 8.0	27440401

ETIM

ETIM 4.0	EC002643
ETIM 5.0	EC002643

PCB terminal block - SPTD 1,5/ 3-H-3,5 - 1841500

Approvals

Approvals

Approvals

cULus Recognized

Ex Approvals


Approvals submitted

Approval details


cULus Recognized	
	B
mm²/AWG/kcmil	26-14
Nominal current IN	10 A
Nominal voltage UN	150 V

Drawings

Drilling diagram




Dimensional drawing

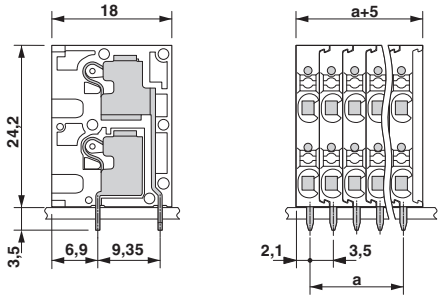

PCB terminal block - SPTD 1,5/ 3-H-3,5 - 1841500

Diagram

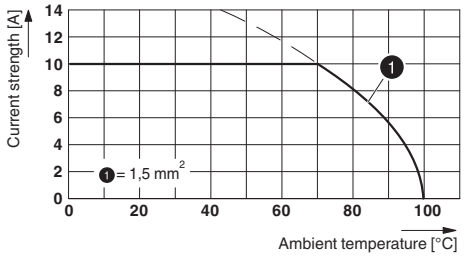

Type: SPTD 1,5/...-H-3,5

Phoenix Contact 2015 © - all rights reserved
http://www.phoenixcontact.com

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

PHOENIX CONTACT:

0808671:0311 1674794 1778599 2800976 3210202 0800379 0817028 0828799 1407671 0801422
1817440 0818153 3244449 5435970 3241240 0818111 1604561 2838254 3248125 0801820 1442188
1539570 1619453 1899414 1956137 3036424 2800865 2905346 1052345:0021 1712737