

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/26/18	


APPROVED: _____


DATE: _____ TITLE: _____

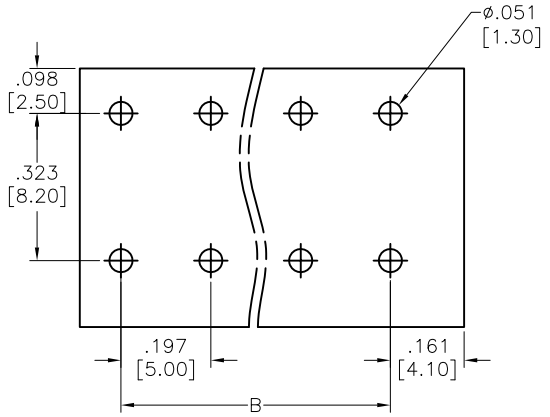

RECOMMENDED PCB LAYOUT



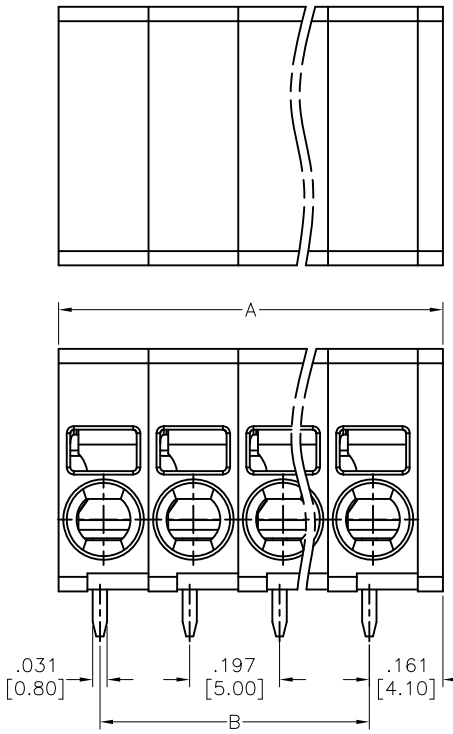

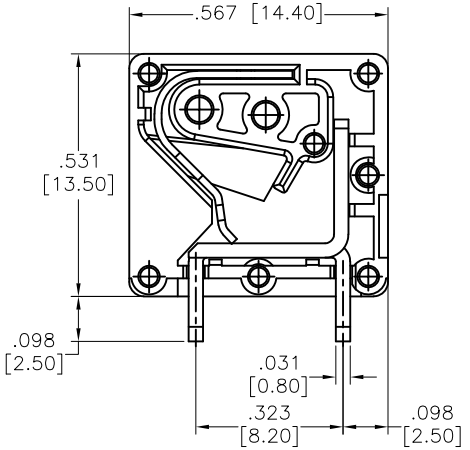

WITHOUT COVER

SPECIFICATIONS:
Material:
Insulator: PA, rated UL 94V-0
Insulator color: Green
Contact: Copper Alloy, Tin plated
Electrical:
Voltage rating: 300V
Current rating: 20A
Dielectric withstanding voltage: 1,600 VAC for 1 minute
Mechanical:
Strip length: 9~10mm
Wire Range: 24~12 AWG
Temperature Rating:
Operating temperature: -40°C to +105°C
Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

Positions: 01 thru XX
A= .197 [5.00] x No. of Positions + .055 [1.40]
B= .197 [5.00] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MM [INCHES]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	11/26/18
CHECKED	AC	11/26/18
APPROVED		

ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: EURO BLOCK, .197 [5.00] PITCH, HORIZONTAL

SIZE	PART NO.	REV.
X	EB163A-XX-C	-

REF:	SCALE:	SHEET
S00067C	NTS	1 OF 1

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

ADAM TECH:

SPH2-16-U-SMT EBJA-04-C-BK MMI-P1PG10SGG52 PH1-20-U-A BHR-10-VUA BHR-20-VUA SW-PB8-AA00B2GE-2 25CH-B-07 CDH-11 SW-PB7-07LB42CRRG12V 1CH-A-10 ESMC-F-80-SGS-SMT-B-PP-T/R ICS640T PLCC-52-AT SD-PNN10-MMLAL-S00-000 EB163A-05-C-180 ICM-316-1-GT-HT PH1RA-03-UA RF1-07-T-00-75 RF55-29L-T-00-50-G-SH SMC-2-08-1-GT DA15-PT-2 DB25-PT-1BLJS EBSA-02-A MDJ-009-FS PH1RB-02-UA 2PH1-16-UA-SMT-B DMF-02-S MTJ-88AX1-FSN-LH-M4S SW-PB7-1Z-A-RG-H-3-G2A