


MAPX	MODIFICATION	DATE

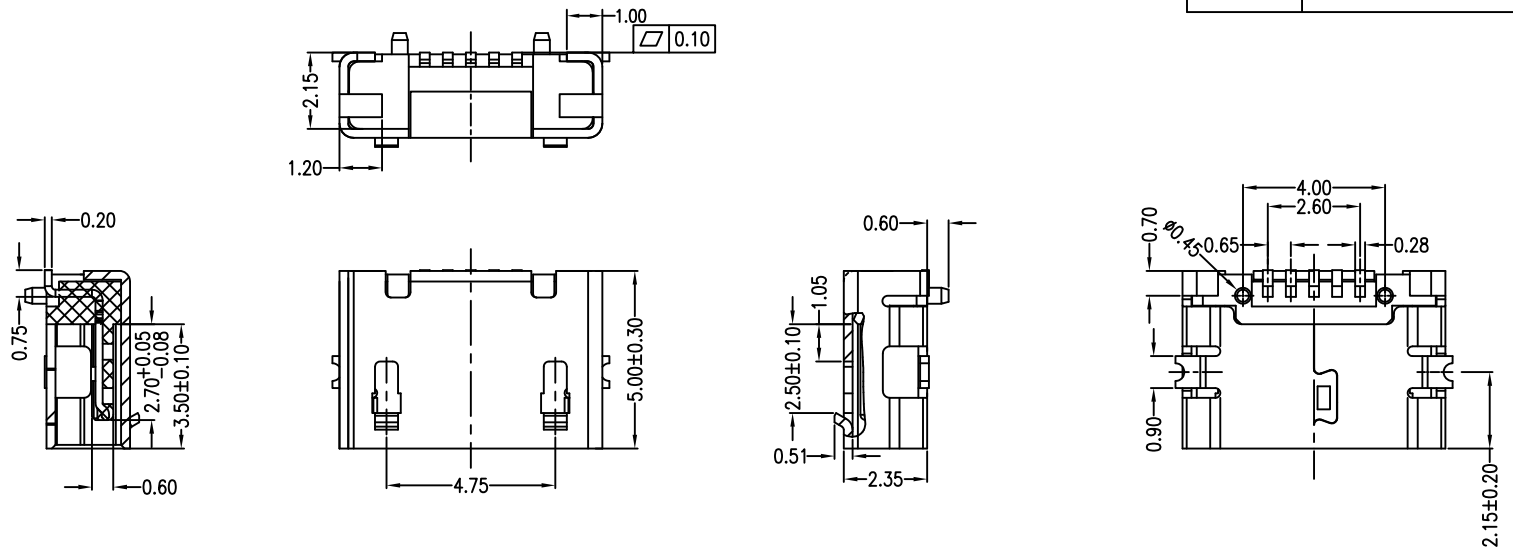

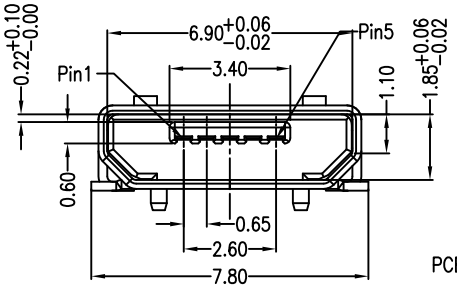

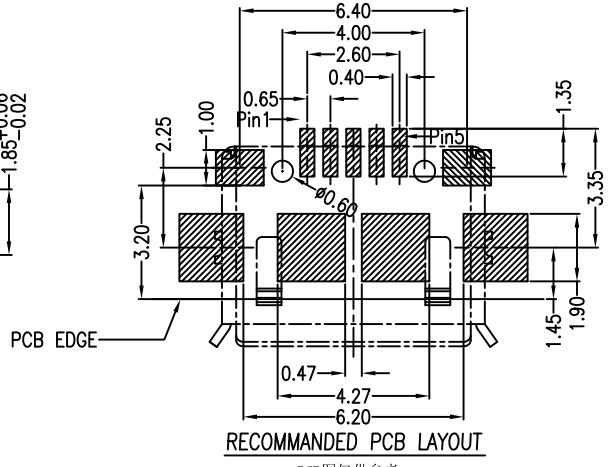

RECOMMANDED PCB LAYOUT

PCB图仅供参考

Note:
1.Material:
- 1.1 Housing: High temperature thermoplastic with g.f,UL94v-0
- 1.2 Contact: copper alloy,t=0.20mm
- 1.3 Shell: copper or sus304,t=0.25mm

2.Specification:
- 2.1 Current rating:1,5PIN 1.8A Max/2,3,4PIN 1A Max.
- 2.2 Dielectric withstanding voltage: 100 V(ac) for 1 min.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 100 MΩ Min.
- 2.5 Total mating force: 3.57 Kgf Max.
- 2.6 Total unmating force: 1.0 Kgf Min
- 2.7 Temperature range: -30°C~80°C

产品图
PRODUCT CHART DWG

公差一览表
TOLERANCE UNLESS OTHERMSE

X.	±0.25	X.	±5.°
.X	±0.20	.X	±2.°
.XX	±0.15	.XX	±1.°
.XXX	±0.10	.XXX	±0.5°

深圳市精拓金电子有限公司

单位 UNITS	MM	制图 DRAWING	GAVIN	制图料号 PRODUCT PART NO.	920-D62A2021S10100
比例 SCALE	1:1	审核 CHKD		产品名称 PRODUCT NO.	MICRO 5S B型两脚贴板无边有柱加焊脚短端SMT
日期 DATE	2012.06.10	核准 APPD		角法 VIEW	版本 VER A0

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Jing extension:

906-552A1012D10200 908-351A1011D10100 912-312A1012D10100 916-151A1022Y10200
917-P81A202ES60201 918-418K2022Y40011 920-A62A2021S10108 904-232A2031S10100
906-262A1021D10200 918-468K2029Y50000 920-A62A2021S10104 907-312A1101Y10210
910-151A2021D10100 912-112A2021S10100 920-C62A2021S10103 911-221A2021S10100
912-112A1011D10100 918-318K2023C40005 920-F52A2021S10105 920-C52A2021S10105
904-232B2032S10100 919-162A1012D10400 920-A64A2091S101A3 904-331B2032S10200
906-752B1114D10200 907-111A1022D10200 917-B88C201AH70201 918-415K3028S40000
905-761A2032S10200 920-154A2021Y10110