DESCRIPTION

RST9361MA is a low-capacitance Transient Voltage Suppressor (TVS) designed to provide electrostatic discharge (ESD) protection for high-speed data interfaces. With typical capacitance of 0.25pF, RST9361MA is designed to protect parasitic-sensitive systems against over-voltage and over-current transient events. It complies with IEC 61000-4-2 (ESD), Level 4 (±15kV air, ±8kV contact discharge), IEC 61000-4-4 (electrical fast transient - EFT) (40A, 5/50 ns), very fast charged device model (CDM) ESD and cable discharge event (CDE), etc.

RST9361MA uses ultra-small DFN1006 package. Each RST9361MA device can protect one high-speed data line. It offers system designers flexibility to protect single data line where space is a premium concern. The combined features of low capacitance, ultra-small size and high ESD robustness make RST9361MA ideal for high-speed data port and high-frequency line applications, such as cellular phones and HD visual devices.

FEATURES

- ✧Transient protection for high-speed data lines
  - IEC 61000-4-2 (ESD) ±15kV (Air)
  - ±8kV (Contact)
  - IEC 61000-4-4 (EFT) 40A (5/50 ns)
  - Cable Discharge Event (CDE)
- ✧Package optimized for high-speed lines
- ✧Ultra-small package (1.0mm×0.6mm×0.5mm)
- ✧Protects one data, control line
- ✧Low capacitance: 0.25pF (Typical)
- ✧Low leakage current
- ✧Low clamping voltage

MACHANICAL DATA

- ✧DFN1006 package
- ✧Flammability Rating: UL 94V-0
- ✧Packaging: Tape and Reel
- ✧High temperature soldering guaranted:260℃/10s
- ✧Reel size: 7 inch


ORDERING INFORMATION

- ✧Device: RST9361MA
- ✧Package: DFN1006
- ✧Marking: 3B
- ✧Material: Halogen free
- ✧Packing: Tape & Reel
- ✧Quantity per reel: 10,000pcs

APPLICATIONS

- ✧Serial ATA
- ✧Desktops, Servers and Notebooks
- ✧Cellular Phones
- ✧MDDI Ports
- ✧USB Data Line Protection
- ✧Display Ports
- ✧Digital Visual Interfaces (DVI)

PIN CONFIGURATION



CIRCUIT DIAGRAM




ABSOLUTE MAXIMUM RATING

Symbol	Parameter	Value	Units
V_{ESD}	ESD per IEC 61000-4-2 (Air) ESD per IEC 61000-4-2 (Contact)	±20 ±20	kV
P_{PP}	Peak Pulse Power (8/20μs)	84	W
T_{OPT}	Operating Temperature	-55~125	°C
T_{STG}	Storage Temperature	-55~150	°C


ELECTRICAL CHARACTERISTICS (Tamb=25°C)

Symbol	Parameter	Test Condition	Min	Typ	Max	Units
V_{RWM}	Reverse Working Voltage				3.3	V
V_{BR}	Reverse Breakdown Voltage	I_T = 1mA	4.2			V
I_R	Reverse Leakage Current	V_{RWM} = 3.3V			100	nA
V_C	Clamping Voltage	I_{PP} = 1A, t_p = 8/20μs			12	V
		I_{PP} = 4A, t_p = 8/20μs			21	V
C_J	Junction Capacitance	V_R = 0V, f = 1MHz		0.25		pF

ELECTRICAL CHARACTERISTICS CURVE

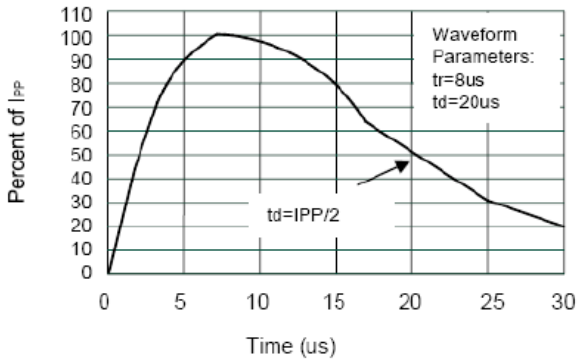


Pulse Waveform

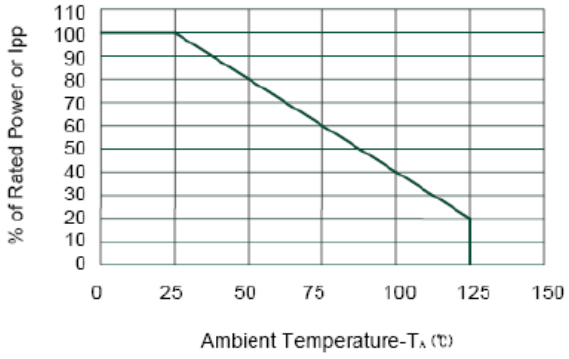

Power Derating Curve


DFN1006 PACKAGE OUTLINE DIMENSIONS

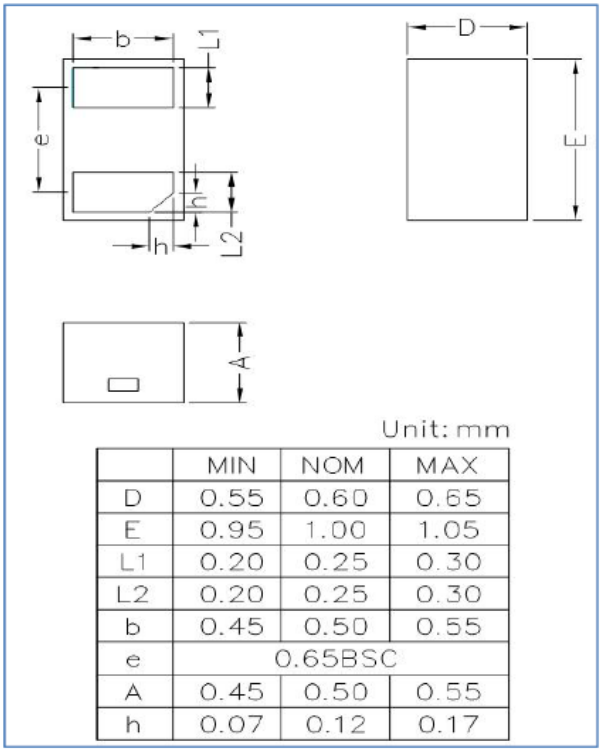

Unit: mm

	MIN	NOM	MAX
D	0.55	0.60	0.65
E	0.95	1.00	1.05
L1	0.20	0.25	0.30
L2	0.20	0.25	0.30
b	0.45	0.50	0.55
e		0.65BSC	
A	0.45	0.50	0.55
h	0.07	0.12	0.17

Dimension: Millimeter
(Stencil thickness: 0.1)



Soldering Footprint

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Slkor:

1SMAF4735A SL4949 SL7333-8 SLESD0521D52RG 1SMA5929A BAV99DW BZT52B9V1 DB305S SL214M SL2302 SL4407A MM5Z12V MMBT3906T SL9459 SLPESDNC2FD5VB SLESD0701OC LM78L05D SL5N100P MM1Z15B MMDT2222A MMST2907A SLE0504 ZMM18 ES2D FR107 SL0603ESDA-TR1 SL15T120FL SL4041 SL45H11 SL9926A