
PROPRIETARY INFORMATION:
PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK,INC.

REVISION

REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE, RFS. 25311, SO	12/02/13	HM

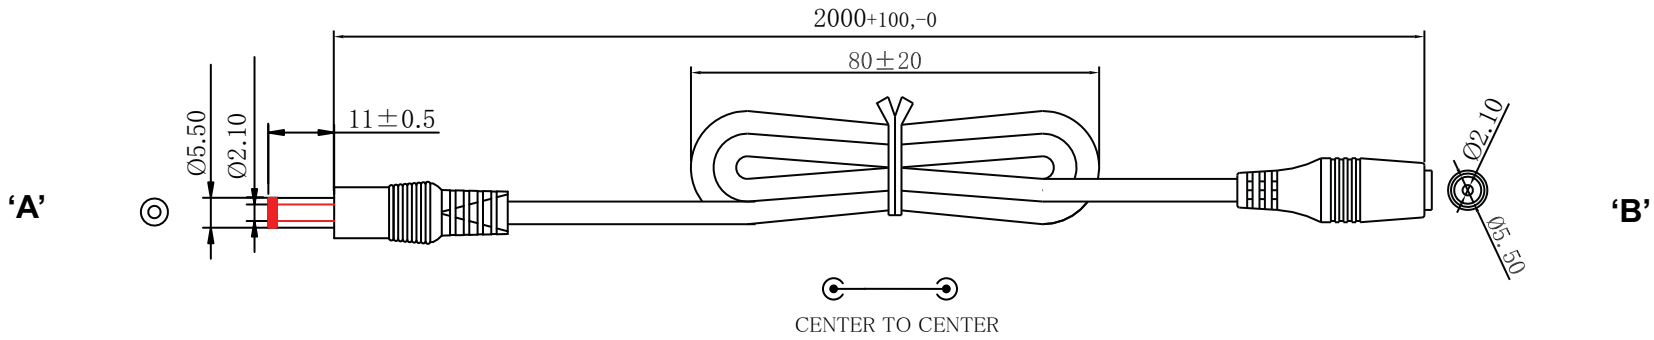

GENERAL SPECIFICATIONS:

CABLE TYPE / SIZE:	ROUND, UL1185, 18 AWG, 1C+SHIELD
CABLE JACKET COLOR:	BLACK
OVERALL LENGTH (L):	2000 +100, -0 mm
END 'A' TERMINATION(PLUG):	STRAIGHT FEMALE BARREL Ø2.1 x 5.5 x 11 mm NICKEL-PLATED, WITH BLACK INSULATOR, PLUG OVERMOLD, BLACK PVC (INCLUDING STRAIN RELIEF)
END 'B' TERMINATION(RECEPTACLE):	Ø2.1 x 5.5 mm, NICKEL-PLATED
APPROVALS CABLE:	UL, CSA or cUL
APPROVALS CONNECTOR:	N/A

PACKING:

HANKED PER DRAWING.
MAXIMUM SHIPPING CARTON WEIGHT IS 30 KG.

NOTE:

1.CABLE MUST BE MARKED WITH APPROVAL SYMBOLS OR FILE NUMBER(S).

OR

DASH NO.	PART NO	REV.	DESCRIPTION	NOTES

TABULATION BLOCK

TOLERANCES:
DECIMALS .xx +/- 0.01 .xxx +/- .005 ANGULAR +/- 1°
MILLIMETERS .x +/- 1.0 .xx +/- 0.5 ANGULAR +/- 1°

GlobTek, Inc.
www.globtek.com
186 Veterans Dr. Northvale, NJ 07647
Tel. 201-784-1000 Fax 201.784.0111

DWG TITLE: LOW VOLTAGE EXTENSION CORD

INIT.BY: SO	DATE 12/02/13			
DRAWN: NF	DATE: 12/02/13	FSCN No.: G, CC	SIZE A	REV. A
APRVD: HM	DATE: 12/02/13	SCALE: NONE	PART NO: **CFB11852M0CMB(R)**	SHEET 1/1

Contents of this document are subject to change without prior notice

Foot Note:
Globtek Inc. will not be liable for the safety and performance of these power product if unauthorized access and repair occurs. End user should consult the applicable UL,CSA or EN Standards for proper installation instruction.

Limitation of Use:
Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

GlobTek:

6104112M703A(R)