


Jun.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
1	RE-T-00760	T.S		

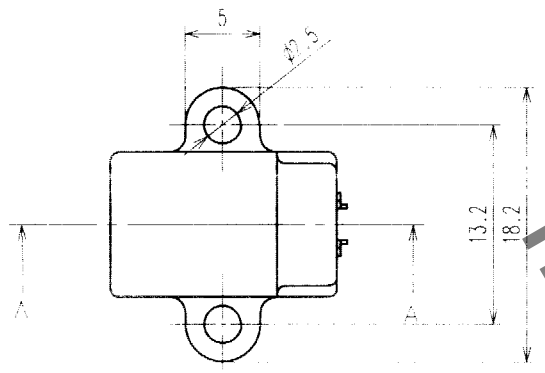


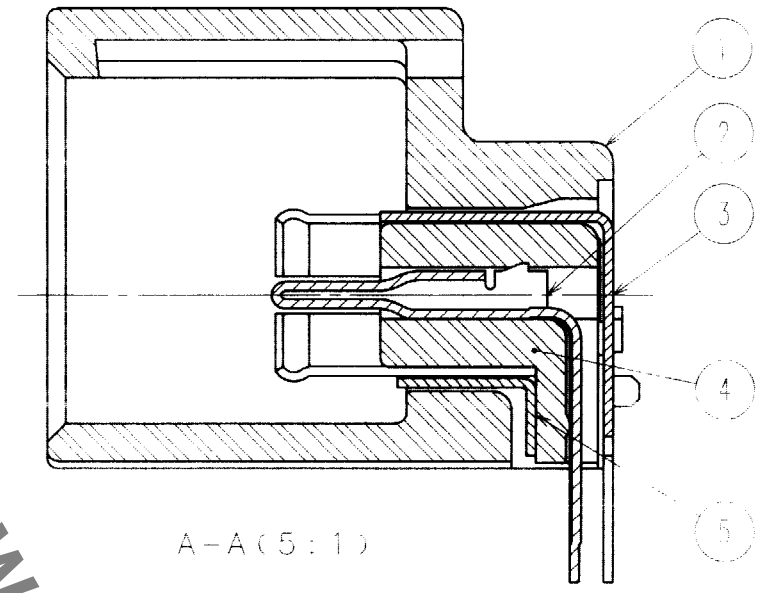



A-A(5:1)

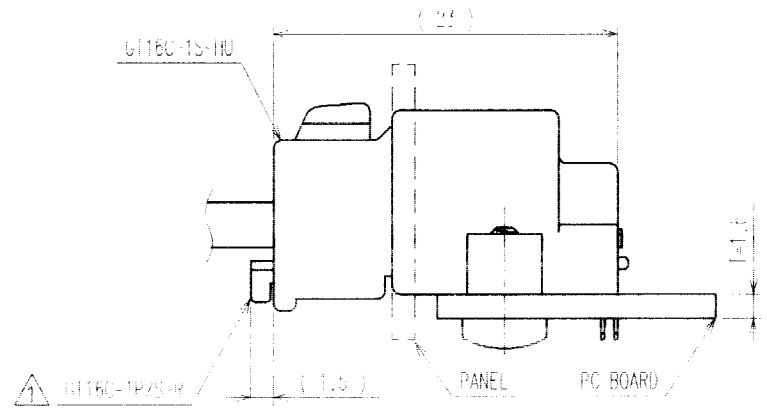


MATED CONNECTORS

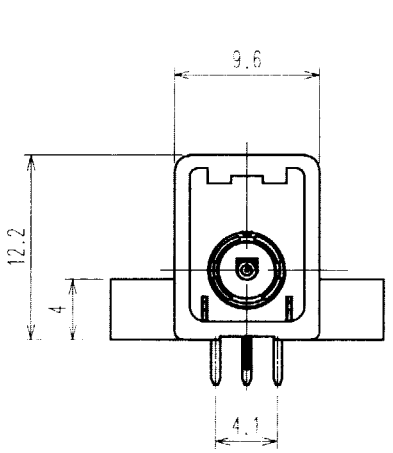


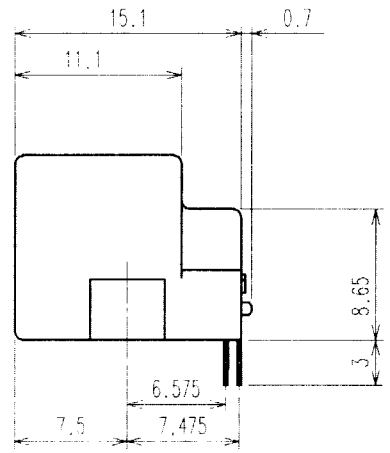

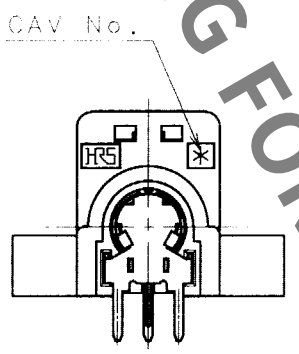


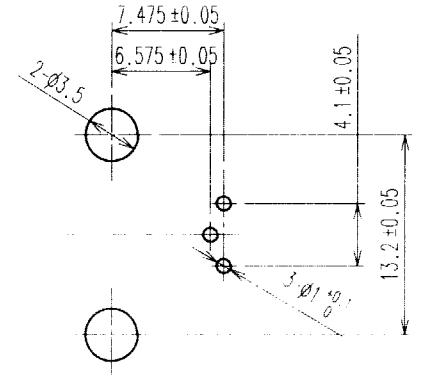

RECOMMENDED PC BOARD HOLE PATTERN

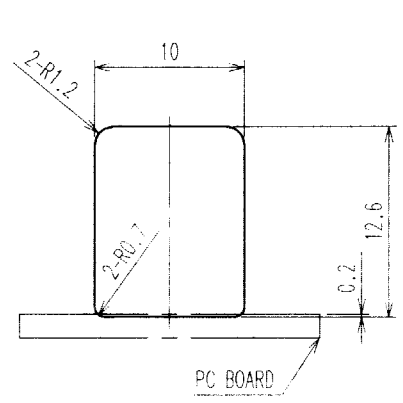

RECOMMENDED PANEL CUTOUT



NOTE1. FIXING SCREW SHALL BE IN ACCORDANCE WITH ISO 1481 OR 7049 NOMINAL DIAMETER 3, AND LENGTH 6.

NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
3	PHOSPHOR BRONZE	TIN PLATED ,T=0.25			
2	PHOSPHOR BRONZE	TIN PLATED ,T=0.25	5	PHOSPHOR BRONZE	TIN PLATED ,T=0.25
1	PBT	LIGHT GRAY	4	PPS	NATURAL

CODE NO.(OLD)	DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
	T.SHISHIKURA '02 .5 .8	T.SHISHIKURA '02 .5 .8	M.OKADA '02 .5 .8	K.SATO '02 .5 .8	

SCALE 2 : 1 UNITS mm	DRAWING NO. EDC3-165888	PART NO. GT16C-1P-DS
HIROSE ELECTRIC CO.,LTD.	CODE NO. CL766-0013-1	1/1

TO

FORM NO.229

HRS DRAWING FOR REFERENCE

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Hirose Electric:

DF17(3.0)-40DS-0.5V(57) DF59M-2224PCF ZE05-24DP-2H ZE05H-4P-2V(A) BM29B0.6-4DS/2-0.35V(51) DF11-16DP-2DSA(24) DF36A-25P-SHL DF52-4P-0.8C FH41-50S-0.5SH(28) FH72-21S-0.3SHW RM15TP-2PA(81) ZE05H-12DP-2H DF62C-4S-2.2C FX18-80S-0.8SH FX8-120S-SV(22) DF40C-50DP-0.4V(51) HDE-CTH(10) ZE064W-8DP-HU/R(A) FX18-60S-0.8SH GT8E-6S-HU RM12BRD-2PH(81) RM15TRH-10PH(81) ZH05-20DP-HU(B) DF19A-3032SCFA(41) DF65-4P-1.7V(21) FH35C-19S-0.3SHW(50) DF33C-4S-3.3C DF22A-1416SCFA DF57AH-5S-1.2C FH41-30S-0.5SH(05)