



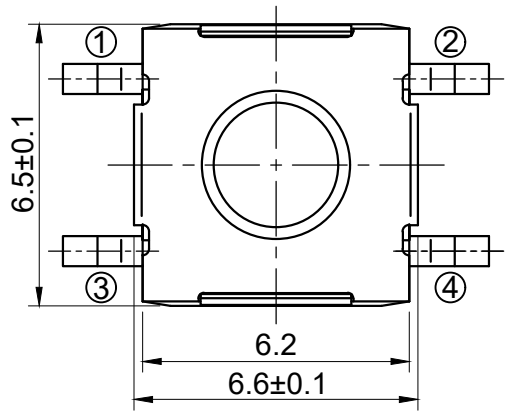

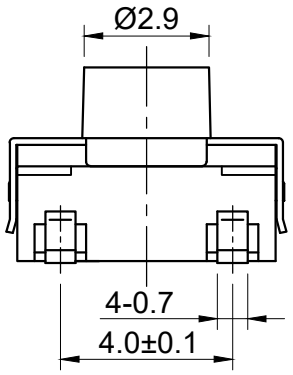


GT-TC126B-H043-L1


G-SWITCH

Operating Force
A=160gf
B=250gf
D=350gf
F=320gf
G=400gf
H=600gf


Switch Height (mm)
H031=3.1mm
H034=3.4mm
H035=3.5mm
H043=4.3mm
H050=5.0mm
H052=5.2mm

Switch lifetime (Force)
L1=100,000 Cycles(D)
L3=300,000 Cycles(A、B)
L5=500,000 Cycles(A、B)

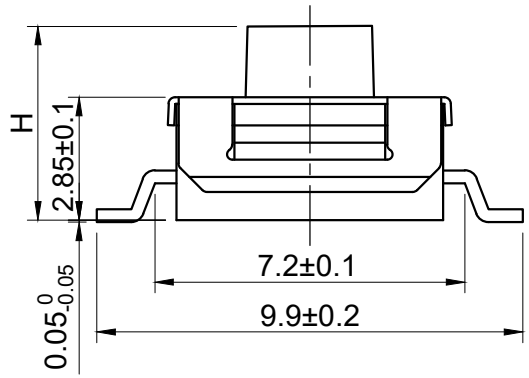

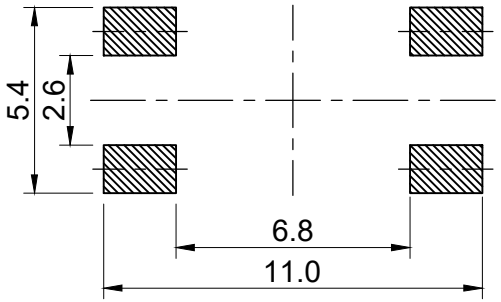

P.C.B LAND DIMENSION



CIRCUIT DIAGRAM

Pb Process Capable | RoHS Compliant 2002/95/EC | HALOGEN Compliant Halogen Free

G-Switch Specification:
Operating temperature range：-40℃to+85℃
Rating：50mA.12V DC
Insulation resistance:：100MΩ min.100V DC
Dielectric strength： 250V AC for 1 min
Contact resistance:： 100m Ω max.
Travel:0.35±0.1mm

品赞科技 G-Switch ®	**G-Switch Electronic (HongKong) CO.,Ltd.**				
Unless otherwise specified, Tolerance: X. ±0.30 X.x ±0.20 X.xx ±0.15 X.xxx ±0.10 Angles ±3°	DESIGN FengFengChen	DATE 2019.05.29	Molde code: GT-TC126B-H043-L1		
	CHECKED	DATE			
	APPROVED	DATE			
	http://www.dg-switch.com		REV.: X1	SCALE: 4:1	UNIT: mm
	TEL:0769-82388879		SIZE: A4	SHEET: 1/1	

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

G-Switch:

GT-BTP30004-0720B-015A GT-BTP30006-0650B-015A GT-TC025D-H0065-L1 GT-USB-7010H
GT-TCB73B-H090-L1 GT-BTP30007-0350B-019B GT-B0403FSV19-50B1101 GT-B0803MSV20-10B0401
GT-BTP30007-0240B-019B GT-TC079A-H0040-L1 GT-USB-6017 GT-USB-7093B
GT-B0803MSV20-60B0401 GT-USB-7010EN SS-23H02-G080 GT-BTP25004-0400A-010A
GT-TC074A-H050-L1 GT-TC193A-H0675-L1 ST-0275S00-082-182 GT-BTP16006-0180B-014B
GT-BTR20008-0460A-004A GT-USB-7019D GT-USB-7084B GT-BTP30007-0720B-015A
GT-BTP30004-0350B-019B GT-BTP30006-0500B-015A GT-USB-2201 GT-F0502SR20-04SMT01
GT-TC155A-H0060-L50 GT-USB-7012D