




REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.03.05	阿树

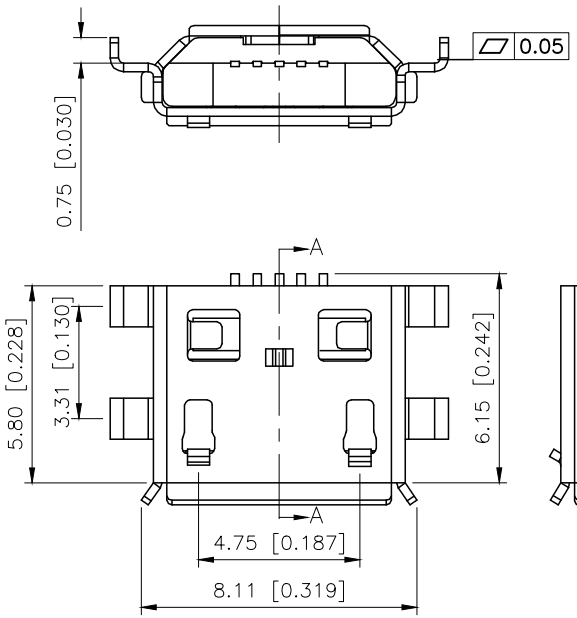


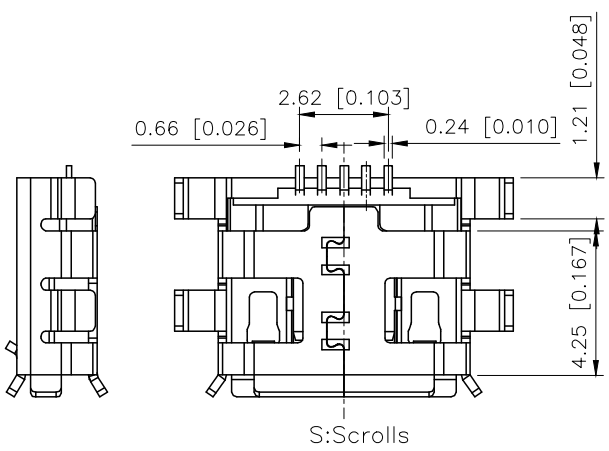

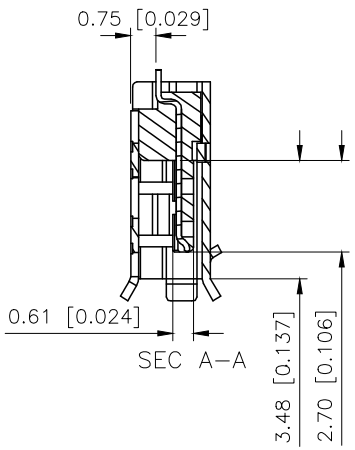

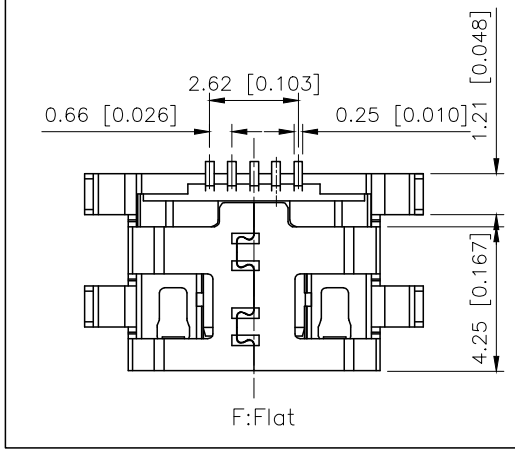

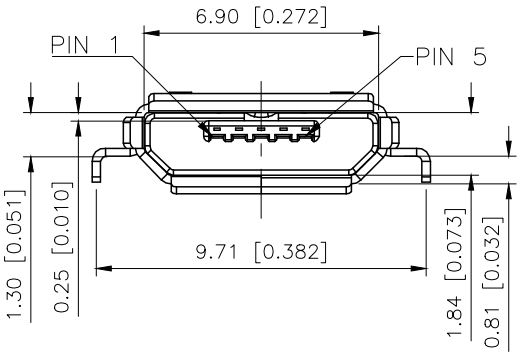

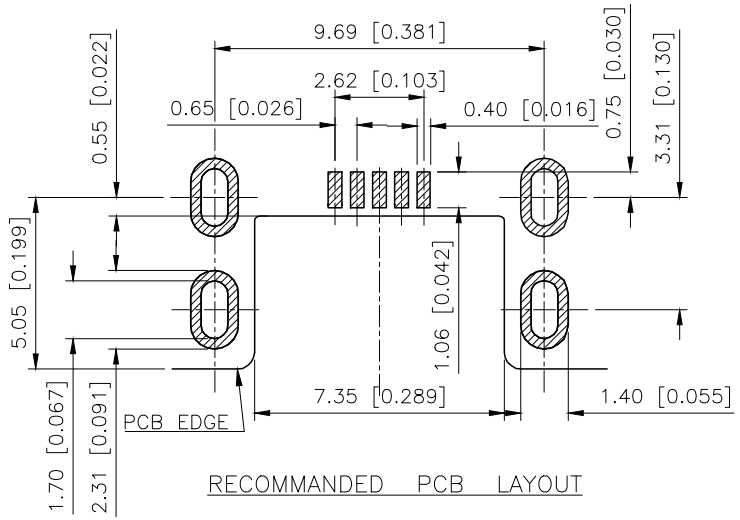

Material
Housing Material: LCP, UL94V–0, black
ontact Terminal: Copper Alloy
Metallic Shell: Sus
Electrical
Voltage Rating: 30 V AC
Current Rating: Signal (Pins 2,3,4): 1.0A, Power (Pins 1,5): 1.8A
Contact Resistance: 30mΩ Max
Insulation resistance: 1000MΩ Min
Dielectric withstanding voltage: 250V AC/Minute
Mechanical
Durability: 10,000 cycles
Mating Force: 35N (3.57Kgf) Max
Unmating Force: 8N (0.82Kgf) Min.

U253–05XX–4BH93–XS

1:AU 1U"
6:AU 30U"
T:TIN
N:NICKEL
S:Sus
S:Scrolls F:Flat

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAuCES	

XKB Connection 星坤

DESIGN	阿树	VIEW:	MODEL TYPE: MICRO USB
CHECKED		UNIT: mm/in	PART NO.: U253–05XX–4BH93–XS
APPROVED		SIZE: A4	DWG NO.:

XKB INDUSTRIAL PRECISION CO.,LIMITED

SCALE	PAGE	REVISION
N/A	1/1	A1

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

XKB Connection:

X8821WVS-04L-LPSN TM-007-D1-A-04 TS-1101VS-C-A-B TS-1102SD-A-R-R U263-161N-5BQC10-1 U263-241N-4BQC15 X0502WVS-20D1S-LPSN X1011H-2x25-N0HF X1304WVS-52B-LPV01 X5521FR-2x02-C70D32-1743 X9812WVS-2x15-6TV01 DS-10BLP X0825WT7BL1 DC-030CH-SMT X0811FVS-80BS-LPV01 X1002WRS-04B-9TSN X05A10L10G X2026WV-2x03-N0SN X4611WR-01I-C40D28 XKSIM-004 X05A10L20G X05A26H20G X1502WV-08K-N0SN X6511WVS-18H-C60D48-R1 X0400WVS-12-LPV01 X05A26H35G X2011WR-04A-N0SN X4611WRS-19I-C40D28 DC-044AE-2.0 X1321WVS-2x25J-C40D53