







ROHS

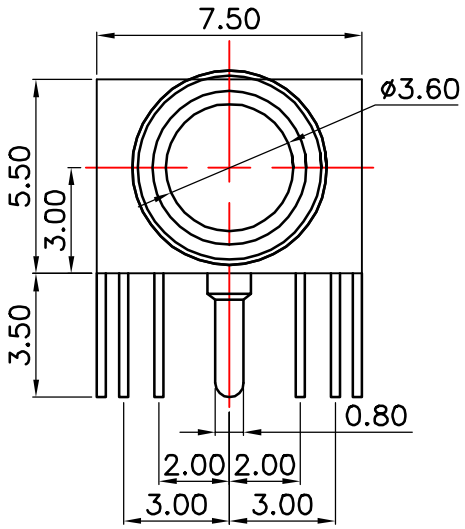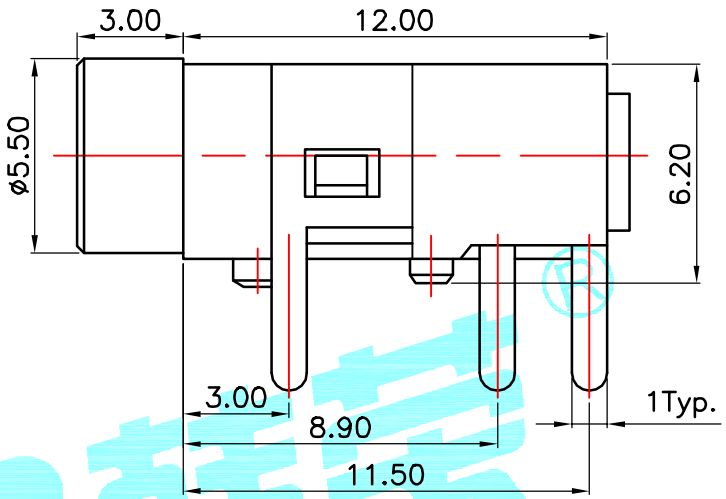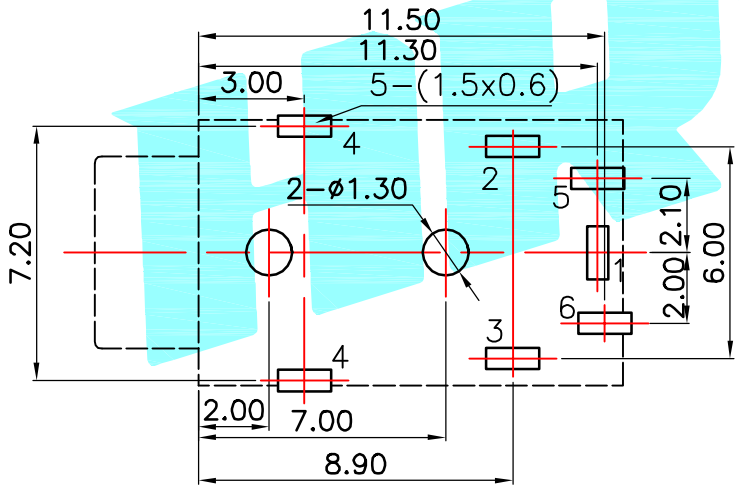



P.C.B LAYOUT(copper-sided view)



Model No.	PJ-3910-A	PJ-3910-B	PJ-3910-C
Schematic			
		PJ-3910-D	PJ-3910-E
			

Rating:0.5A 30V DC
Contact Resistance:100 mΩ Max.
Operating temperature:-20℃~70℃
Operating force:3-20N
Operating Life:5,000cycles

②	Terminal	——	6	Phosphor bronze	Au Plating	——
①	Housing	——	1	Nylon	Black	——
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS		DATE	HRO韩荣® ELECTRONICS CO.,LTD	
DRAWN	J.X.Zhang	2013/11/11		
CHECKED			TITLE:	PHONE JACKES
APPROVALS			PART NO.	PJ-3910
TOLERANCES ARE	30~以下 ±0.30 / 10~30 ±0.20 / 5~10 ±0.15 / ~5 ±0.10	ANGLE ±2°	UNIT: mm	SCALE: 1:1
			DRAWING NO.	——
				SHEET 1 OF 1

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
——	A	——	NEW	——	——	——

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

HRO:

K2-1102BG-I4CW-01 K3-2258S-E1 PJ-3250-5A SIM-08A SS-22D03-G4 U-C-M5DW-W-1 DC-031A-10A K3-1346S-F1 U-C-M5SS-Y-1 U-F-M5DD-Y-L U-M-M5DD-W-2 K5-1617SA-01 U-F-M5SS-W-5 DS-01BP K2-1102SP-A5SC-04 PJ-399B-6A TYPE-C-31-M-04 K2-1818DP-A3SW-01 K2-1101DF-A4DW-01 U-F-M5DS-Y-1 DQ-03BP K2-1102AT-A4CW-01 K2-1102DP-S3SW-04 U-F-M5DD-Y-L1 K2-1102DP-G4SW-04 K2-1102SP-K4SC-04 K8-5851D-L1 U-F-M5DD-W-L DA-10RP ES-07KP