IEC Appliance Inlet C14, Snap-in Mounting, Solder, Quick-connect, Screw or PCB Terminal

V-Lock



C14

70° C

Description

- Panel Mount:
  Snap-in version, Frontside
- Appliance Inlet, Pin temperature 70 °C, Protection class I
- Solder, quick-connect, screw, PCB

Approvals

- VDE Certificate Number: 40011871
- UL File Number: E96454
- CSA File Number: 27324

Weblinks

pdf, html, General Product Information, Approvals, RoHS, CHINA-RoHS, Mating Connectors, e-Shop, SCHURTER-Stock-Check, Distributor-Stock-Check, Accessories

Newly available variants corresponding to V-Lock mating cordset. The connector is equipped with a notch intended for use with the latching cordset. The cord latching system prevents against accidental removal of the cordset.

Technical Data


Ratings IEC	10 A / 250 VAC; 50 Hz
Ratings UL/CSA	15 A / 250 VAC; 60 Hz
Dielectric Strength	> 3 kVAC between L-N > 1.5 kVAC between L/N-PE (1 min/50 Hz)
Allowable Operation Temp.	-25 °C to 70 °C
Degree of Protection	from front side IP 20 acc. to IEC 60529
Protection Class	Suitable for appliances with protection class 1 acc. to IEC 61140
Terminal	Solder, quick-connect, screw, PCB
Panel Thickness s	Snap-in version 1/1.5/2.0/2.5/3.0/4.0 mm
Material: Housing	PA6, black or grey, UL 94V-0

Appliance Inlet	C14 acc. to IEC/EN 60320-1 UL 498, CSA C22.2 no. 42 (for cold conditions) pin-temperature 70 °C, 10 A, Protection Class 1

Dimensions

Quick connect or solder terminals


31.2 mm

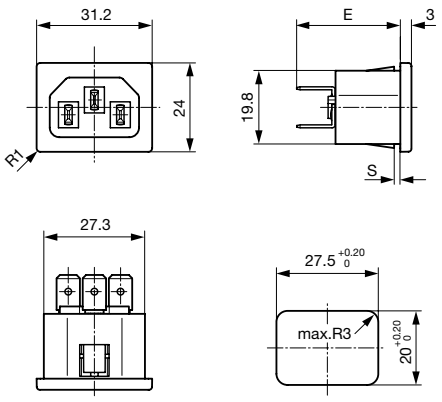

E: Quick-connect terminals 4.8x0.8 mm: 27.0 mm
E: Quick-connect terminals 6.3x0.8 mm: 28.0 mm
E: Solder terminals short: 22.5 mm
E: Solder terminals long: 26.2 mm


Downloaded from Arrow.com.

Quick-connect or solder terminals, housing for V-Lock

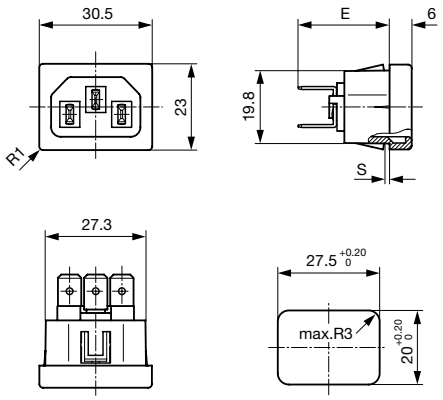


E: Quick-connect terminals 4.8x0.8 mm: 27.0 mm
E: Quick-connect terminals 6.3x0.8 mm: 28.0 mm
E: Solder terminals short: 22.5 mm
E: Solder terminals long: 26.2 mm

Screw terminals

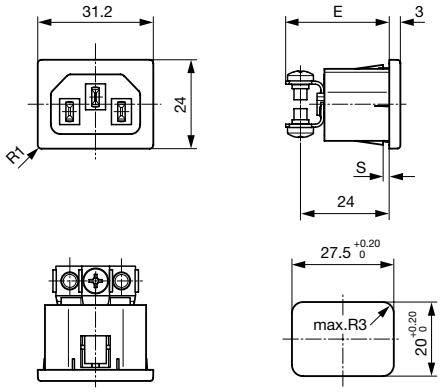

E: Screw terminals M3.5, 28.0 mm

PCB terminals

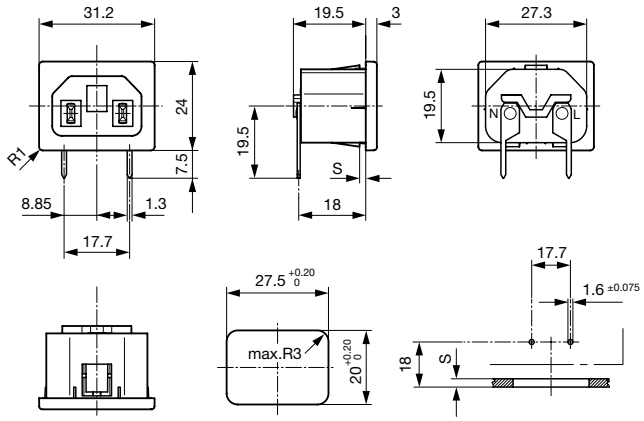

Downloaded from Arrow.com.

Config. Code

6010 - H - A B C 0- D - E G O

The characters are placeholders for the correspondingly keys of selections from the key tables.

6010 - **H** - A B C 0- D - E G O = Type

Type	Configuration key
protection class 1	X

6010 - H - **A** B C 0- D - E G O = Terminals

Terminal L		Configuration key
short solder terminal (L = 4.8 mm)		2
long solder terminal (L = 8.5 mm)		3
PCB-terminal (standard)		4
Blade terminal (4.8 x 0.8 mm)		8
Blade terminal (6.3 x 0.8 mm)		9
screw terminal		A

6010 - H - A **B** C 0- D - E G O = Terminals

Terminal N	Configuration key
short solder terminal (L = 4.8 mm)	2
long solder terminal (L = 8.5 mm)	3
PCB-terminal (standard)	4
Blade terminal (4.8 x 0.8 mm)	8
Blade terminal (6.3 x 0.8 mm)	9
screw terminal	A

Symbols similar as in table A

6010 - H - A B **C** 0- D - E G O = Terminals

Terminal Ground	Configuration key
short solder terminal (L = 4.8 mm)	2
long solder terminal (L = 8.5 mm)	3
Blade terminal (4.8 x 0.8 mm)	8
Blade terminal (6.3 x 0.8 mm)	9
screw terminal	A

Symbols similar as in table A

6010 - H - A B C 0- **D** - E G O = Color

Color	Configuration key
Black	A
Grey	B

6010 - H - A B C 0- D - **E** G O = Style

Style	Configuration key
snap-in (x=panel thickness)	4

6010 - H - A B C 0- D - E **G** O = Dimension X

Dimension "X"	Configuration key
10	
15	
20	
25	
30	
40	

The dimension "X" is dispalyed in ($^{1}/_{10}$ mm). This information is also valid for the order code

6010 - H - A B C 0- D - E G **O** = Features

Features	Configuration key
not used	0
V-Lock	V

Downloaded from Arrow.com.

Variants

Config. Code	Description	Order Number
6010-X-8880-A-415V	6010, IEC Appliance Inlet C14, 70°C, version: 1, L: Blade terminal (4.8 x 0.8 mm), N: Blade terminal (4.8 x 0.8 mm), ground: Blade terminal (4.8 x 0.8 mm), color: Black, design: snap-in (x=panel thickness), dimension X: 15, features: V-Lock	6162.0155
6010-X-9990-A-415V	6010, IEC Appliance Inlet C14, 70°C, version: 1, L: Blade terminal (6.3 x 0.8 mm), N: Blade terminal (6.3 x 0.8 mm), ground: Blade terminal (6.3 x 0.8 mm), color: Black, design: snap-in (x=panel thickness), dimension X: 15, features: V-Lock	6162.0156
6010-X-2220-A-410V	6010, IEC Appliance Inlet C14, 70°C, version: 1, L: short solder terminal (L = 4.8 mm), N: short solder terminal (L = 4.8 mm), ground: short solder terminal (L = 4.8 mm), color: Black, design: snap-in (x=panel thickness), dimension X: 10, features: V-Lock	6162.0161
6010-X-8880-A-410V	6010, IEC Appliance Inlet C14, 70°C, version: 1, L: Blade terminal (4.8 x 0.8 mm), N: Blade terminal (4.8 x 0.8 mm), ground: Blade terminal (4.8 x 0.8 mm), color: Black, design: snap-in (x=panel thickness), dimension X: 10, features: V-Lock	6162.0162
6010-X-9990-A-410V	6010, IEC Appliance Inlet C14, 70°C, version: 1, L: Blade terminal (6.3 x 0.8 mm), N: Blade terminal (6.3 x 0.8 mm), ground: Blade terminal (6.3 x 0.8 mm), color: Black, design: snap-in (x=panel thickness), dimension X: 10, features: V-Lock	6162.0163
6010-X-2220-A-425V	6010, IEC Appliance Inlet C14, 70°C, version: 1, L: short solder terminal (L = 4.8 mm), N: short solder terminal (L = 4.8 mm), ground: short solder terminal (L = 4.8 mm), color: Black, design: snap-in (x=panel thickness), dimension X: 25, features: V-Lock	6162.0164
6010-X-8880-A-425V	6010, IEC Appliance Inlet C14, 70°C, version: 1, L: Blade terminal (4.8 x 0.8 mm), N: Blade terminal (4.8 x 0.8 mm), ground: Blade terminal (4.8 x 0.8 mm), color: Black, design: snap-in (x=panel thickness), dimension X: 25, features: V-Lock	6162.0165
6010-X-9990-A-425V	6010, IEC Appliance Inlet C14, 70°C, version: 1, L: Blade terminal (6.3 x 0.8 mm), N: Blade terminal (6.3 x 0.8 mm), ground: Blade terminal (6.3 x 0.8 mm), color: Black, design: snap-in (x=panel thickness), dimension X: 25, features: V-Lock	6162.0166

The listet variants should be available from stock Other versions on request www.schurter.com/contact

Packaging unit 50 Pcs

Accessories



Description
Assorted Covers
Rear Cover

Mating Outlets/Connectors



Category / Description	
Appliance OutletOverview complete	
IEC Appliance Outlet F, Screw-on Mounting, Front Side, Solder Terminal	4787
IEC Appliance Outlet F, Snap-in Mounting, Front Side, Solder or Quick-connect Terminal	4788
IEC Appliance Outlet F or H, Screw-on Mounting, Front Side, Solder, PCB or Quick-connect Terminal	5091
IEC Appliance Outlet F or H, Screw-on Mounting, Front Side, Solder or Quick-connect Terminal	5092
Appliance Outletfurther types to6010	



ConnectorOverview complete	
IEC Connector C15, Rewireable, Straight	0101
IEC Connector C15A, Rewireable, Straight	0102
IEC Connector C15A, Rewireable, Straight	0102-G
IEC Connector C15A, Rewireable, Angled	0112
IEC Connector C13, Rewireable, Angled	4012
Connectorfurther types to6010	...



Power CordOverview complete	
Power Cord with IEC Connector C13, Angled	0311
Power Cord with IEC Connector C13, Angled	3011
Power Cord with IEC Connector C13, Angled	3012
Power Cord with IEC Connector C13, Angled	3013
Power Cord with IEC Connector C13	3020
Power Cordfurther types to6010	...

Downloaded from Arrow.com.

Category / Description



Power Supply or Interconnection CordOverview complete

Divers Power Supply and Interconnection Cords 10 A	Cord Sets 10 A

Power Supply or Interconnection Cordfurther types to6010

Downloaded from Arrow.com.