


THESE DRAWINGS ARE THE PROPERTY OF QUALTEK ELECTRONICS AND NOT TO BE REPRODUCED FOR OR COMMUNICATED TO A THIRD PARTY WITHOUT THE EXPRESS WRITTEN PERMISSION OF AN OFFICER OF QUALTEK ELECTRONICS.


REVISION			
REV.	DESCRIPTION	DATE	APPROVED
B	RoHS Compliancy	06-01-06	DP

1. PHYSICAL DIMENSIONS

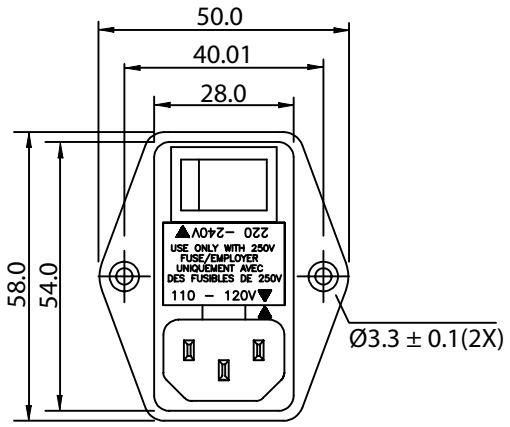

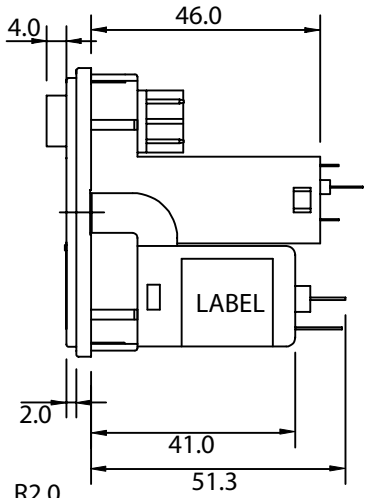


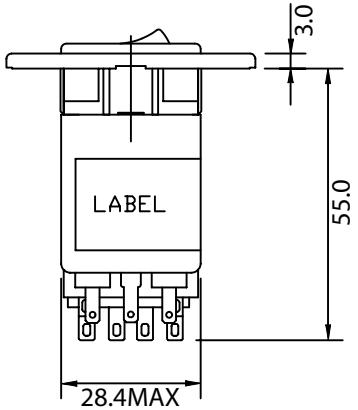

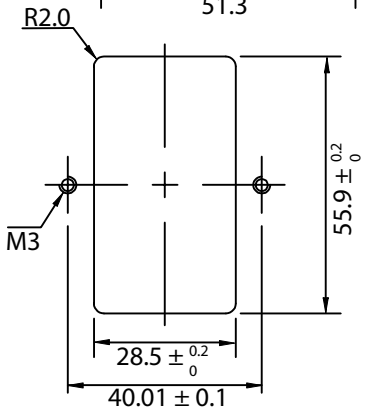

PANEL CUTOUT
(MOUNTING FROM FRONT)

2. ELECTRICAL SCHEMATIC

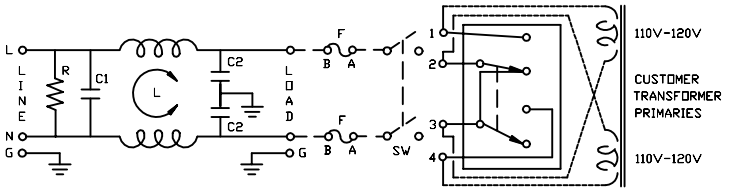

L: 2.5mH
C1: 0.1uF
C2: 2200pF
R: 1.0MΩ

ELECTRICAL CHARACTERISTICS:

1-1. VOLTAGE RATING.....115/250VAC

1-2. CURRENT RATING
A. @ 115 VAC.....3 A RMS MAX
B. @ 250 VAC.....3 A RMS MAX

1-3. OPERATING FREQUENCY.....50/60Hz

1-4. LEAKAGE CURRENT: EACH LINE TO GROUND
A. @ 115 VAC 60Hz.....0.20 mA MAX
B. @ 250 VAC 50Hz.....0.40 mA MAX

1-5. HIPOT RATING (FOR ONE MINUTE)
A. LINE TO GROUND.....2250 VDC
B. LINE TO LINE.....1450 VDC

1-6. MINIMUM INSERTION LOSS IN dB: (AT 50 OHM SYSTEM)

FREQ. MHz	.01	.05	.10	.15	.50	1.0	5.0	10	30
COM. MODE dB	/	/	/	20	25	30	38	40	40
DIF. MODE dB	/	/	/	4	12	18	38	40	40

1-7. OPERATING TEMPERATURE.....-25° TO +85° C

1-8. SAFETY:

1-9. RoHS COMPLIANT

CONTROLLED

Dim range (mm)	Tolerance +/- (mm)
0-1	0.15
1-6	0.20
6-18	0.30
18-50	0.50
50-120	0.70
120-250	0.90
250-500	1.20

Qualtek Electronics Corp.
PPC DIVISION

Part Number: 883-03/001 RoHS Compliant

Description: EMI FILTER

	UNIT: mm	REV. B
Drawn / Date	Checked / Date	Approved / Date
B.ZHANG 04-07-03	04-07-03	JJH / 04-07-03

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Qualtek Electronics:

703W-00/02 3021027-16 312016-01 312019-01 739W-X2/20 311024-01 315086-01 370021-01
703W-00/03 739W-X2/03 770W-X2/10 07145-24 311027-01 319004-T01 FAA1-12038QBHT31-A
Q2-Z-3/8-01-SS250FT 3025033-01 703W-00/07 08129-02 09325-F/30 09325-M/45 09450-F/30 313006-01
390004-01 719W-00/03 08243-SS 738W-X2/03 06250-SS Q-822 364002-D01