



REV.	DATE	DESCRIPTION
A	06/05/03	UPDATE FERRULE DIMENSIONS

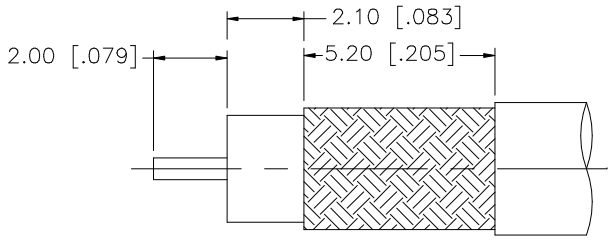

RECOMMENDED CABLE
STRIPPING DIM'S.

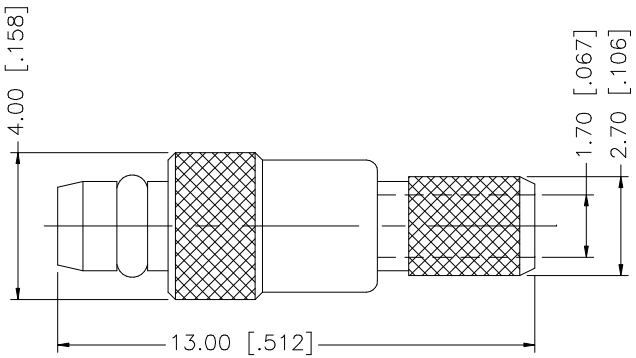

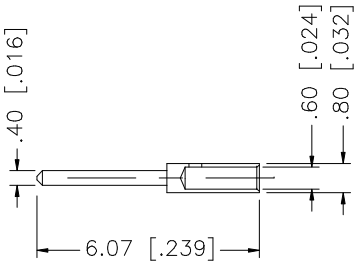

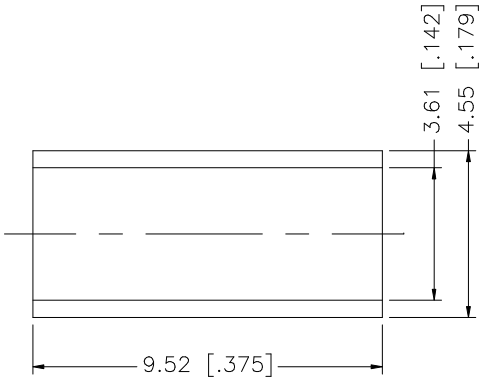

NOTE:
1. CRIMPED FERRULE
   HEX CRIMP SIZE .151"
2. CONTACT PIN TO SOLDER.

	DESCRIPTION	MATERIAL	FINISH	QTY
8				
7				
6				
5	FERRULE	COPPER	GOLD	1
4	RETAINER RING	BER. COPPER	GOLD	1
3	CONTACT PIN	BRASS	GOLD	1
2	INSULATOR	TEFLON	NATURAL	1
1	BODY	BRASS	GOLD	1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERANCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 – 8mm ± 0.20mm
8 – 30mm ± 0.40mm
30 – 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 – .315 = ± 0.007"
.315 – 1.180 = ± 0.015"
1.180 – 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN G.R.S.	06/05/03
CHECKED	
ISSUED	
SHEET 1 OF 1	

CAD FILE C:/262/262110.DWG

Amphenol Connex

PART DESCRIPTION
MMCX CRIMP PLUG
(FOR 316/U DOUBLE BRAID CABLE)

PART NO. 262110

DWG. NO.	REV.	SIZE	SCALE
262110.DWG	A	A	NA

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Amphenol:

54202-S08-07LF 68002116HLF 95157-140LF 86093488314745V1LF 86130202123355E1LF 54202-G0805CLF 86093968813H45V1LF DAPO15S365TLF 68000-236HLF 68001-108HLF 863013A CD15S13E4RV09LF RJE061661210 RJSBE5080C2 LD25S33E4GV00LF 76384-316LF 70218-1116LF 70234-112LF 86093967896755LF 86093968191755E3LF 91614-403ALF LD15P33E4GV00LF 65781-158 67996-204HLF 69192-408HLF D15P13A6RV12LF DCMF37P 68001-200HLF DEM09P032N 70430-164LF