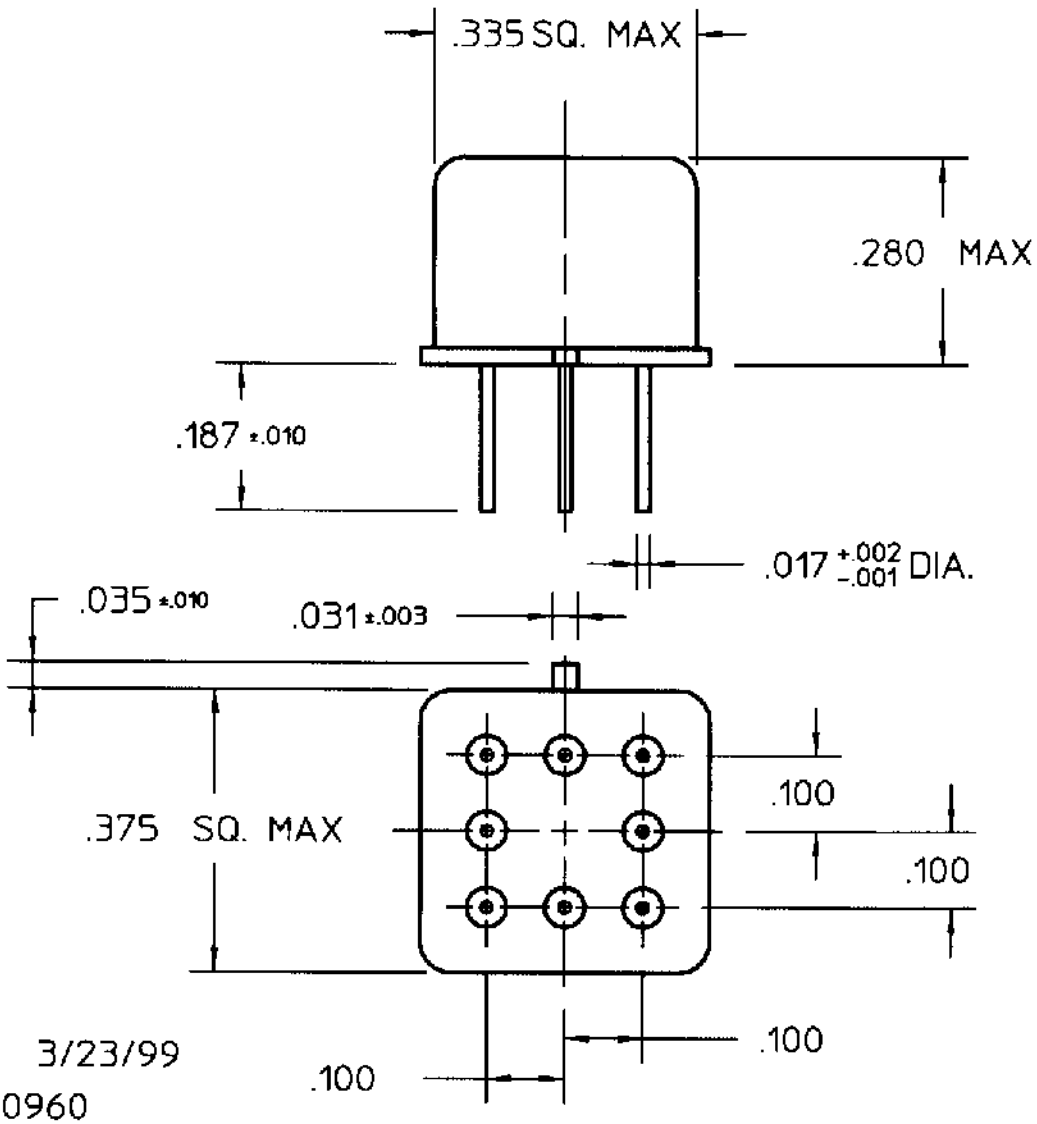


REV. 2 3/23/99
DCO 140960

COIL: @ 25°C

RESISTANCE 390 OHMS ± 10%

NOMINAL VOLTAGE 12.0 VDC

MUST OPERATE 7.0 VDC

MUST RELEASE 4.0 VDC MAX, 0.63 VDC MIN.

ENVIRONMENT:


VIBRATION 10 CPS TO 3000 CPS @ 30 g's

SHOCK 75 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 2.0 MS MAX
RELEASE TIME 1.5 MS MAX
CONTACT BOUNCE 1.5 MS MAX

CUSTOMER DATA SHEET



TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 1 AMP
28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 4/17/97 CK. 3-23-99

COMMUNICATIONS INSTRUMENTS, INC.

CUST. QPL
CUST. NO. M39016/17-028L

TYPE JMGA RELAY

JMGAP-12L

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

1969656-1 1743455-2 3631B101LL CPF0402B37K4E1 MPT100C18RF 1-794222-0 141991-2 2377783-2
917696-1 ROX05SJ18R SMW73R0JT 175977-2 2834055-1 TE50BR39J 1-962915-1 3-1393225-0
936348-1 SBCHE154R7K 2-292161-3 650075-000 CRGCQ2010J3K3 RH73H2A40MKTN 1393431-1
2005330-1 U5254-000005-030PA 1903112-2 2310537-1 2380312-2 3430B2F51RTDF SBCHE64R7K