
1 Features

- Meets IEEE 802.3 and ANSIX3.263 standards .RoHS Compliant
- 10/100/1000 Base-T,Surface Mount Type,Open Header
- Cable interface for isolation and low common mode emissions.
- Storage temperature range: -40℃ to +85℃
- Operating temperature range:0℃ to +70℃

2 Specifications(特性参数)


Part No	OCL(uH min) @100KHz/0.1Vrms,8mA	Turns Ratio(3%)	Leakage primary@10KHz 0.1Vrms	DCR (Ω) Max	Cww(Pri:Sec) pF Typ		Isolation Voltage(AC Vrms 3S)
H87202D	350UH	1:1	0.5uH max	0.9/1.2	35		1500V
Part No	Insertion loss(dB max) 1-100MHz	Return Loss(dB Min) MHz			CMRR(dB min)MHz		Crosstalkm (dB
		1-30	40~60	60~100	1-60	60~100	1~100
H87202D	-1.2	-18	-14	-10	-40	-35	-30

3 Mechanical(外观尺

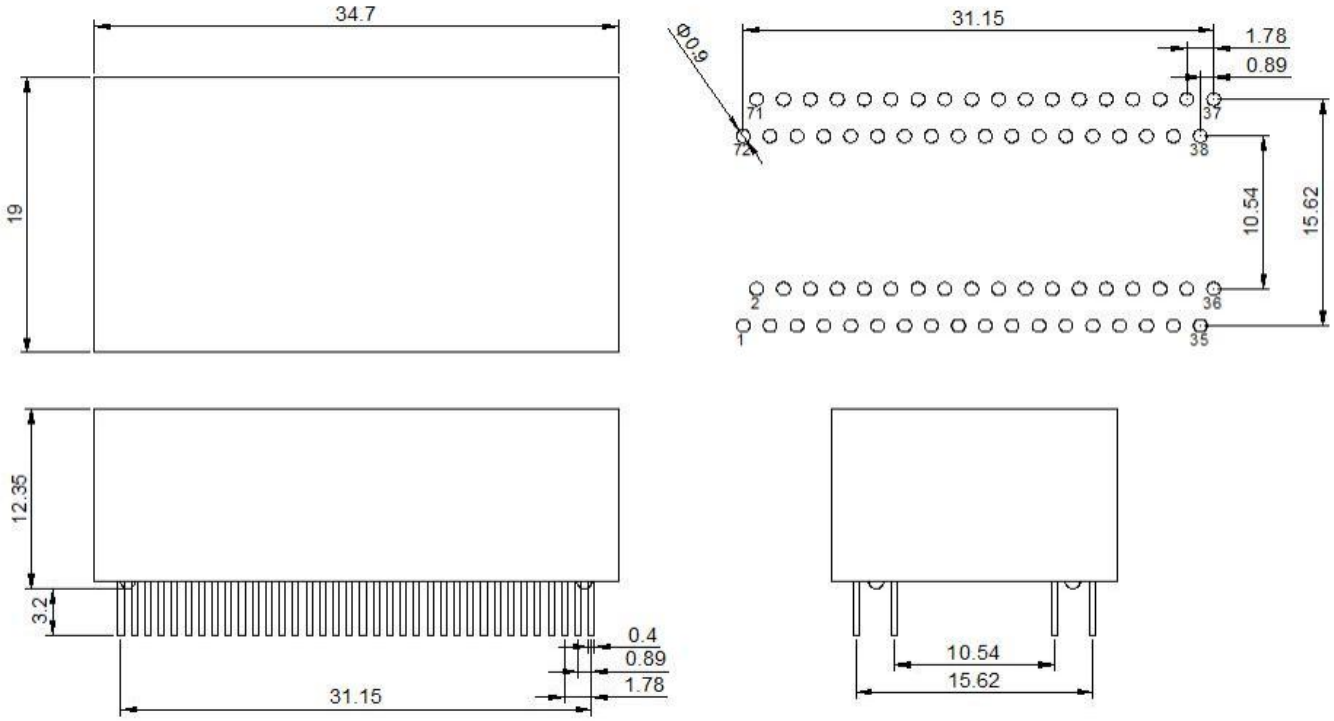

石门盈盛电子科技有限公司 http://www.hqs-t.com/ TEL：0755-21083343 18673625585
Shimen Yingsheng Electronic Technology Co., Ltd https://hqst01.taobao.com E-mail: hqst008@163.com

4 Schematic（原理图）

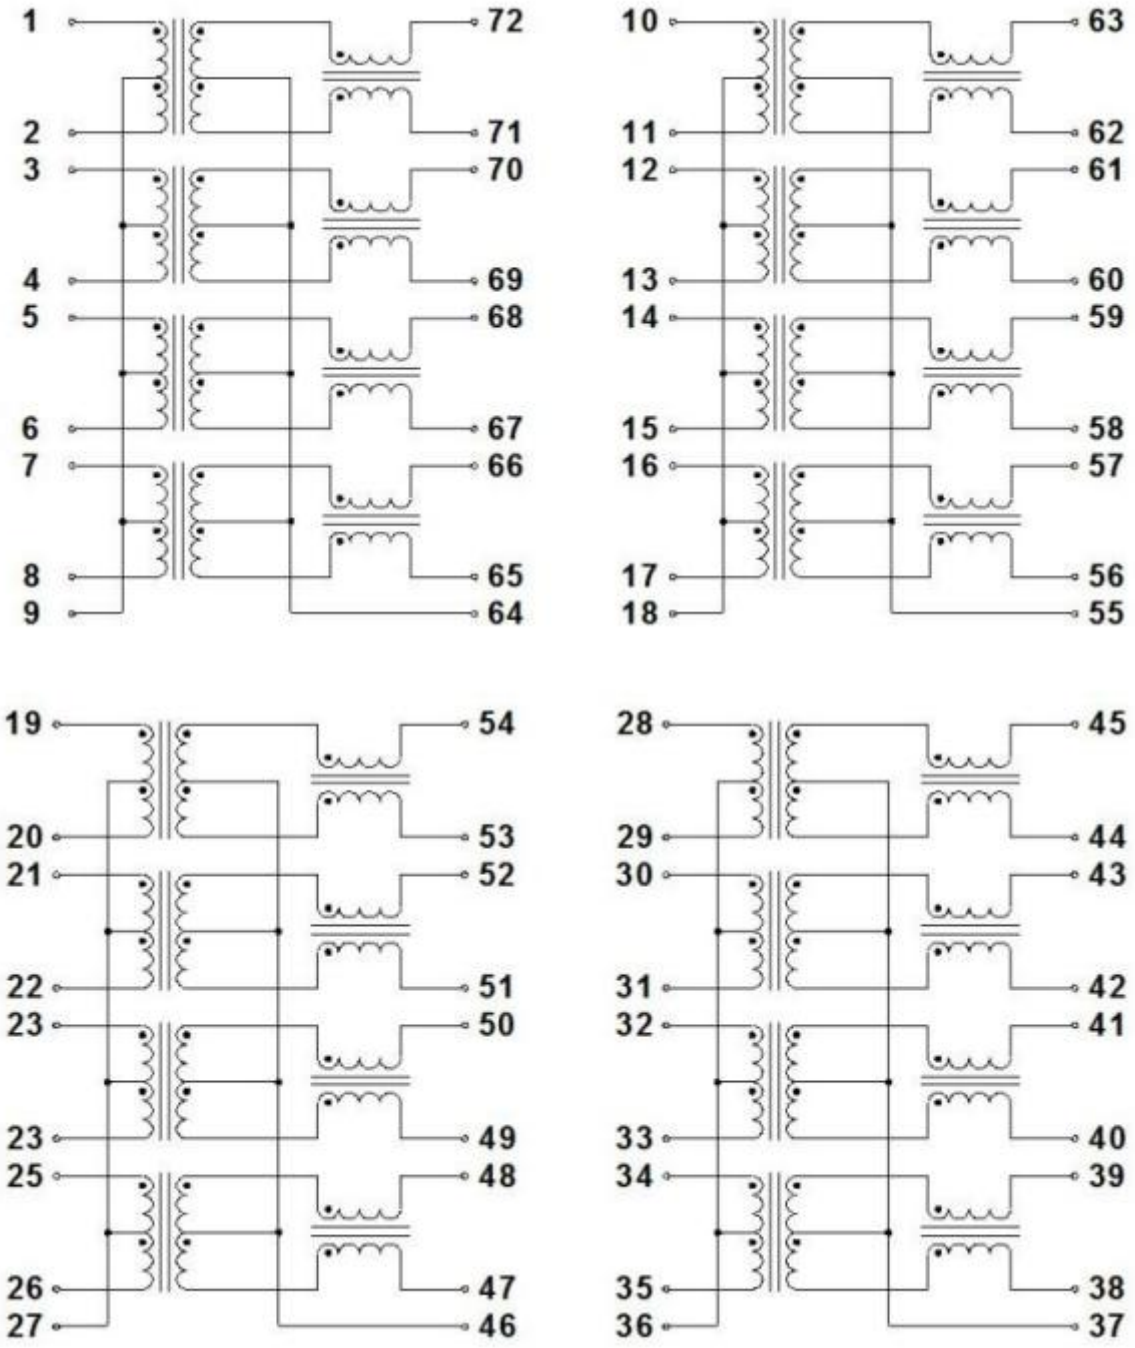

石门盈盛电子科技有限公司 http://www.hqs-t.com/ TEL：0755-21083343 18673625585
Shimen Yingsheng Electronic Technology Co., Ltd https://hqst01.taobao.com E-mail: hqst008@163.com