ES2ABF THRU ES2JBF

Surface Mount Superfast Recovery Rectifier

Reverse Voltage – 50 to 600 V Forward Current –2 A

PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode



Simplified outline SMBF and symbol

FEATURES

- For surface mounted applications
- Low profile package
- Glass Passivated Chip Junction
- Superfast reverse recovery time
- Lead free in comply with EU RoHS 2011/65/EU directives

MECHANICAL DATA

- Case: SMBF
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 57mg / 0.002oz


Absolute Maximum Ratings and Characteristics

Ratings at 25 ℃ ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load.For capacitive load, derate current by 20%.


Parameter	Symbols	ES2ABF	ES2BBF	ES2CBF	ES2DBF	ES2EBF	ES2GBF	ES2JBF	Units
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	50	100	150	200	300	400	600	V
Maximum RMS voltage	V_{RMS}	35	70	105	140	210	280	420	V
Maximum DC Blocking Voltage	V_{DC}	50	100	150	200	300	400	600	V
Maximum Average Forward Rectified Current at T_L= 100 °C	$I_{F(AV)}$	2							A
Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load (JEDEC Method)	I_{FSM}	50							A
Maximum Forward Voltage at 2A	V_F	1				1.25		1.65	V
Maximum DC Reverse Current Ta = 25 °C at Rated DC Blocking Voltage Ta =125 °C	I_R	5 100							μA
Typical Junction Capacitance at V_R=4V, f=1MHz	C_j	45							pF
Maximum Reverse Recovery Time at I_F=0.5A, I_R=1A, I_{rr}=0.25A	t_{rr}	35							ns
Typical Thermal Resistance 2)	$R_{\theta JA}$	65							°C/W
Operating and Storage Temperature Range	T_j, T_{stg}	-55 ~ +150							°C

1）Measured with I_F = 0.5 A, I_R = 1 A, I_{rr} = 0.25 A 2）P.C.B. mounted with 0.5 X 0.5" (12.7 X 12.7 mm) copper pad areas.

Fig.1 Reverse Recovery Time Characteristic And Test Circuit Diagram

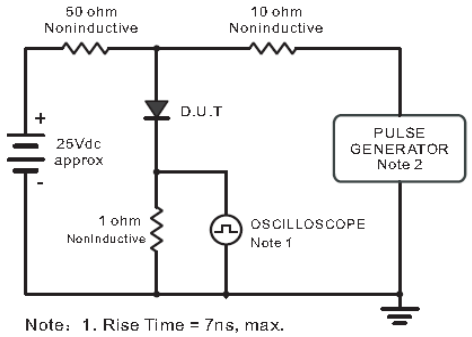

Note: 1. Rise Time = 7ns, max.
Input Impedance = 1megohm,22pF.
2. Ries Time =10ns, max.
Source Impedance = 50 ohms.

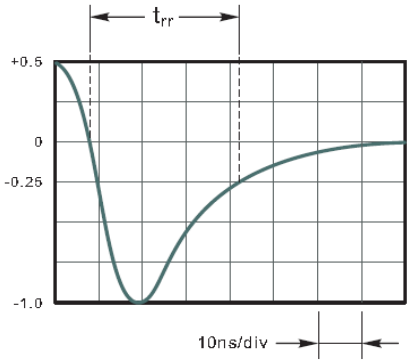

Set time Base for 10ns/div

Fig.2 Maximum Average Forward Current Rating

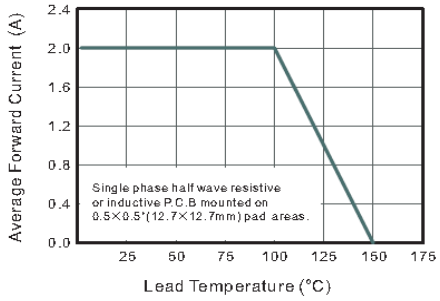


Fig.3 Typical Reverse Characteristics

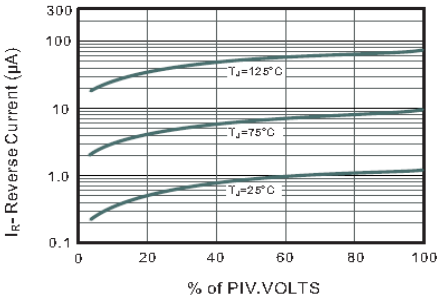


Fig.4 Typical Forward Characteristics

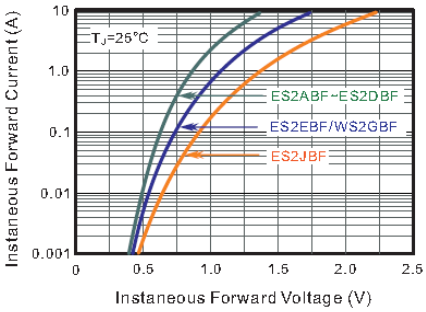


Fig.5 Typical Junction Capacitance



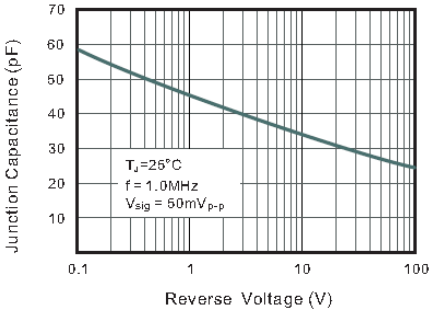


Fig.6 Maximum Non-Repetitive Peak Forward Surage Current

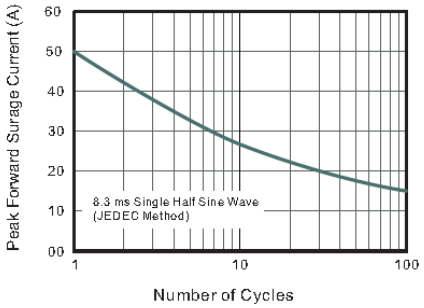


PACKAGE OUTLINE

Plastic surface mounted package; 2 leads SMBF

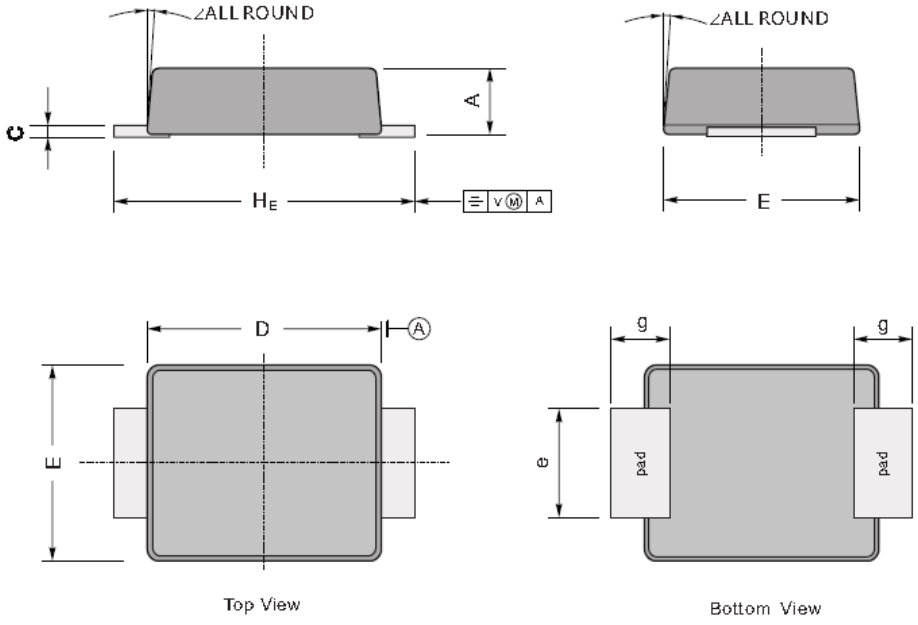

UNIT		A	C	D	E	H_E	e	g	∠
mm	max	1.3	0.26	4.4	3.7	5.5	2.2	1.0	9°
	min	1.1	0.18	4.2	3.5	5.1	1.9		
mil	max	51	10	173	146	216	86	40	
	min	43	7	165	138	200	75		

The recommended mounting pad size

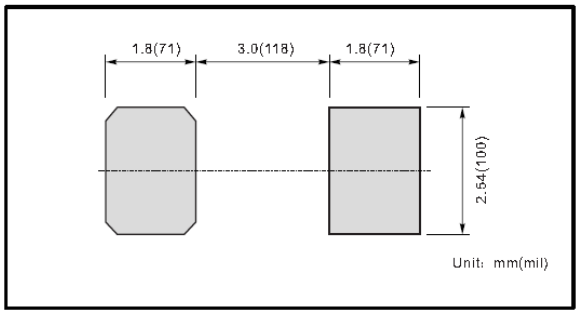

Marking

Type number	Marking code
ES2ABF	E2AB
ES2BBF	E2BB
ES2CBF	E2CB
ES2DBF	E2DB
ES2EBF	E2EB
ES2GBF	E2GB
ES2JBF	E2JB

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

SHIKUES:

SMAJ28CA CRS08 DS36W SK22P04 SS14FL SS210F 2SK3018 FMMT591 2SC2712Y BCX53-16 SMAJ48CA SS310BF 1N4148WS 2SC2873Y MBR120ESF MMBTA14 S8550 SK2371AA SK3401 SMF6.5CA 1SMA4750AG 78L10 BAV70 SK14WA SK2302A SMBJ12A B5819W DMN3052L RS1MG S8050