
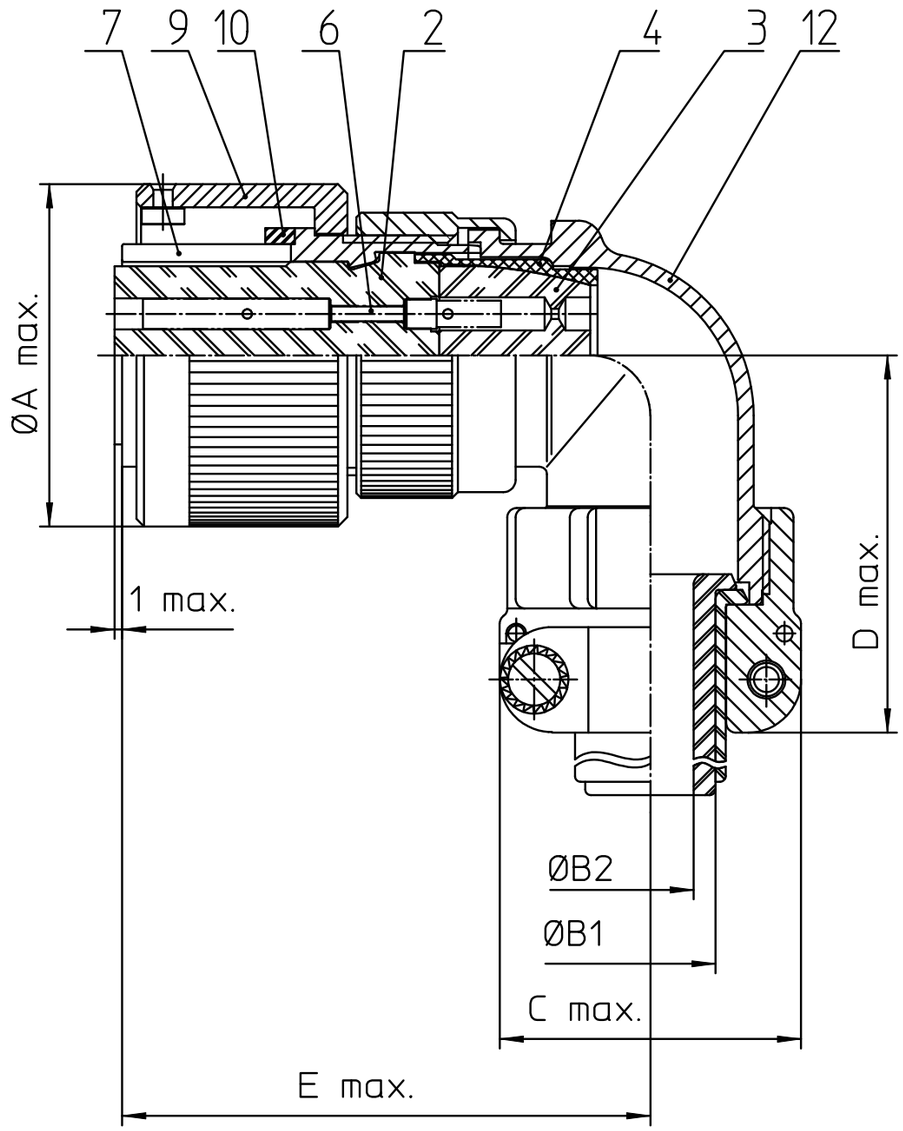


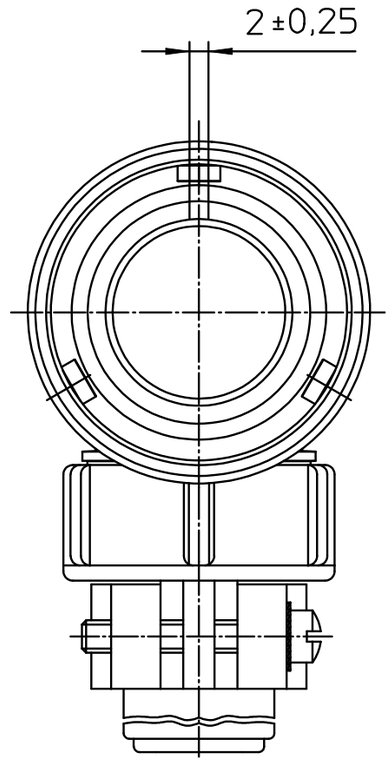

NO.	MASSE / DIMENSIOI
A	22.8
B1	6.6
B2	-
C	22.7
D	42
E	45

NO.	BESCHREIBUNG / DESCRIPTION
2	ISOLIERKÖRPER BUCHSE / INSULATOR SOCKET
3	DICHTKÖRPER / GROMMET
4	ENDRING / ENDRING
6	KONTAKTBUCHSE / CONTACT SOCKET
7	ZYLINDERGHÄUSE / BARREL
9	ÜBERWURFMUTTER / COUPLING NUT
10	DICHTRING FRONT / FRONT SEALING RING
12	ENDGEHÄUSE / ENDBELL

Note: Due to an automatic nomenclature system, numbers generated may not be sequential.

Specification and Dimensions subject to change
Drawings illustrate normal insulator positioning

Material Specification:	
Shell Material:	Aluminium alloy
Shell Plating:	Olive drab chromate over cadmium (conductive)
Insulator Material:	CR-Elastomere
Contact Material:	Copper alloy
Contact Plating:	Hard silver

all dimensions are in mm
Dimensions without tolerance indications are general tolerances in acc. with DIN7168m

drawing for
CUSTOMER

ITT
Engineered for life
ITT CANNON GmbH
D - 71384 Weinstadt/Germany

description
CA3108E10SL-3S-B-F80-F0
Plug, 90°
Endbell with clamp and bushing
AWG Crimp / Socket / Layout: 10SL-3

© All rights reserved, Reproduction or issue to third in any form whatever is only permitted with written authorization of ITT Cannon

page
1/1

revision
3765 3. Sep 24

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

ITT:

CA3102R18-10PY CA3102R18-22SF80 CA3108E24-10PBF80 KPT04-12-3S CA3102E16S-1SWBF80A176 KPT02E83AP MS3101R10SL-4S MS3102E12S3P CA3102R16S-4P KPT02E-12-3S XLR531 CA06COME14SA7S-44 CA08COM-F14S-2S VG95234B1-28-11SN VG95234B1-22-22PN KPT06J-14-12P MS3106F16S-8S CA3100F18-10PB CB12-12SG MS3106E2222P CA3102E16-10PXBF80 CA3102E18-10PYBF80 CA3108R20-23SB 192900-0030 CA3101F14S-A7PA206 CA3102E16S-5SB CA3102E24A24PB01A176 1929900460 CA3102E16S-1PWBF80A176 CA3102R14S-6S