
AMETHERM
Reliability Delivered On Time

# DATA SHEET
# P/N: SL15 22101

## Mechanical Specifications

| | |
|---|---|
| D | 16.0mm Max |
| T | 5.5±0.5 mm |
| Lead Diameter | 0.8±0.1mm |
| S | 7.8 ±2.0mm |
| L | 39.0±9.0 mm |
| Straight Leads Coating run down | 5.0±2.0mm |
| B | 7.5±0.70mm |
| C | 2.82±0.5mm |

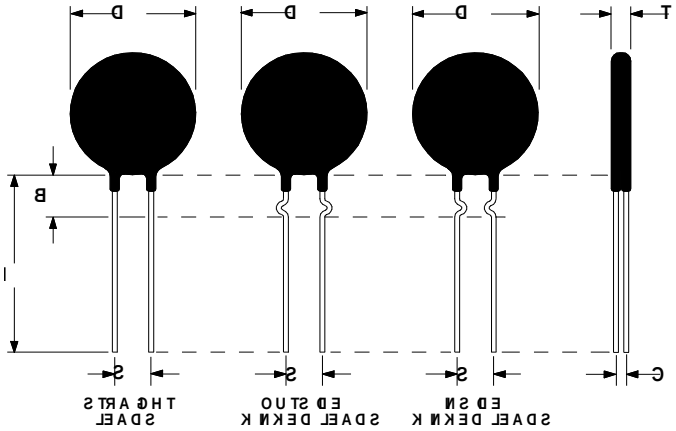

## Electrical Specifications

| | |
|---|---|
| R @25°C | 220.0 Ω ±25% |
| Max Steady State Current (SSI) Up to 65° C | 1.0 Amp |
| Max Instantaneous Energy | 40.0 Joules |
| Resistance @ 100% Max Current | 2.21Ω |
| Dissipation Constant | 18 mW/°C |
| Thermal Time Constant | 45 sec. |
| Body Temperature @ Max SSI | 158 °C |
| Material Type | "L" |
| Max cap at 120 / 240 VAC | 1700 / 425 µF |

| Rev: | Date: | Change: |
|---|---|---|
| 0 | 7/8/03 | Issue |
| 1 | 5/7/11 | Revise Max energy to 25 Joules |
| 2 | 6/23/22 | Revise mechanical dimensions |
| | | |


**Ametherm, Inc**
961 Fairview Drive
Carson City, NV 89701
Telephone: **800-808-2434**
Fax: 702 884-0670
**www.Ametherm.com**


***Reliability Delivered On Time***

# Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

## Ametherm:

MS32 15012 SL10 10003 SL22 10008 SL22 40005 MS22 12103 MS22 22103 MS32 0R536 1DA101J-EC
MS22 20005 SL03 50001 SL15 22101-A SL22 20005 MS32 50006 SL15 4R008 SL22 4R014 AS35 3R030
MS22 10008 MS22 12104 SL10 12101 SL22 60003 SL32 0R530 SL10 40002 SL22 12103-B MS22 75004
MS32 1R036 MS35 20010 SL12 17004 SL22 7R010 ACW007 SM08 103370