Technical Data
Data Sheet N2394, Rev.-

RoHS

SDUR15U120W ULTRAFAST RECTIFIER




TO-247AC

Applications:

- Antiparallel diode for high frequency switching devices
- Anti saturation diode
- Snubber diode
- Free wheeling diode in converters and motor control circuits
- Rectifiers in switch mode power supplies (SMPS)
- Inductive heating and melting
- Uninterruptible power supplies (UPS)
- Ultrasonic cleaners and welders

Circuit Diagram



Features:

- Ultra-Fast switching
- High current capability
- Low reverse leakage current
- High surge current capability
- Terminals finish: 100% Pure Tin
- This is a Pb − free device
- All SMC parts are traceable to the wafer lot
- Additional testing can be offered upon request

Maximum Ratings:

Characteristics	Symbol	Condition	Max.	Units
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	-	1200	V
Average Rectified Forward Current	$I_{F\ (AV)}$	50% duty cycle @Tc=98°C, rectangular wave form	15	A
Peak One Cycle Non-Repetitive Surge Current	I_{FSM}	8.3ms, Half Sine pulse, Tc=25°C	150	A

Electrical Characteristics:

Characteristics	Symbol	Condition	Typ.	Max.	Units
Forward Voltage Drop*	V_{F1}	@15A, Pulse, T_J = 25°C	1.90	2.80	V
	V_{F2}	@15A, Pulse, T_J = 150°C	1.50	2.30	V
Reverse Current*	I_{R1}	@V_R = rated V_R, T_J = 25°C	0.012	50	μA
	I_{R2}	@V_R = rated V_R, T_J = 150°C	22	250	uA
Reverse Recovery Time	t_{rr}	I_F=500mA, I_R=1A, and I_{rm}=250mA	46	50	ns
Reverse Recovery Time	t_{rr}	I_F =15A, di_F/dt = -100A/μs, V_R=600V, T_J= 25°C	128	-	ns

* Pulse width < 300 μs, duty cycle < 2%

Technical Data
Data Sheet N2394, Rev.-

RoHS

Thermal-Mechanical Specifications:

Characteristics	Symbol	Condition	Specification	Units
Junction Temperature	T_J	-	-55 to +150	°C
Storage Temperature	T_{stg}	-	-55 to +150	°C
Typical Thermal Resistance Junction to Case	$R_{\theta JC}$	DC operation	0.4	°C/W
Approximate Weight	wt	-	6.28	g
Case Style	TO-247AC			

Ratings and Characteristics Curves

Figure1
Typical Forward Characteristics

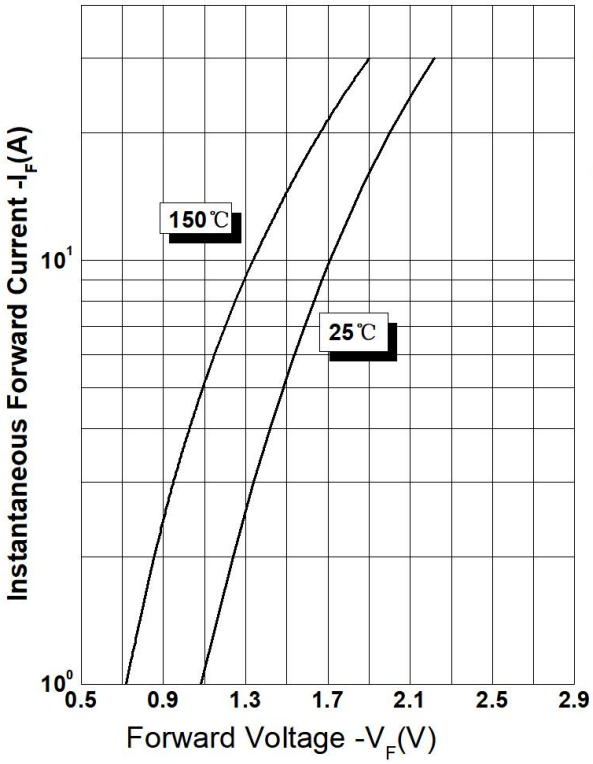


Figure 2
Typical Reverse Characteristics


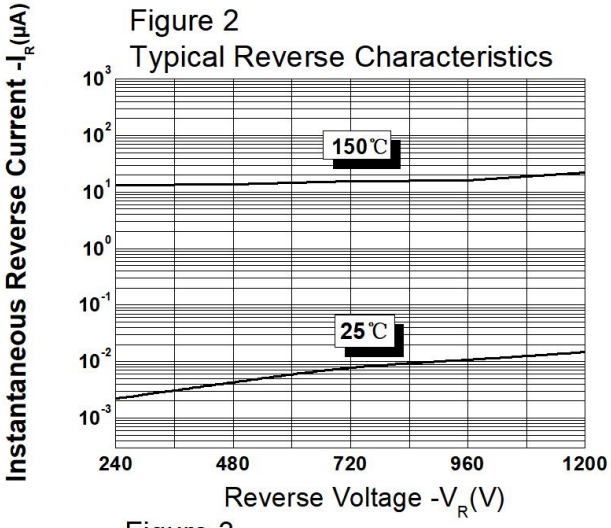


Figure 3
Typical Junction Capacitance

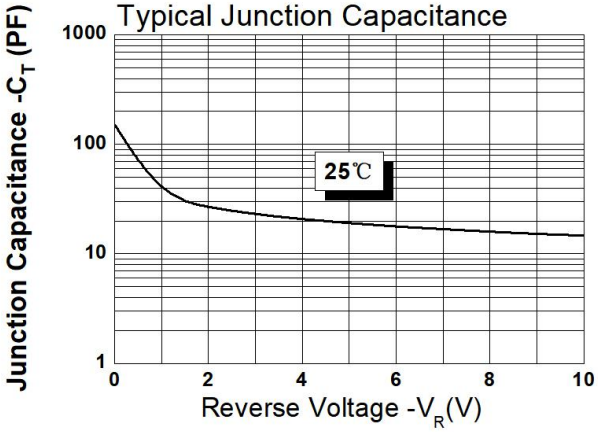


SDUR15U120W

Technical Data
Data Sheet N2394, Rev.-


RoHS

Mechanical Dimensions TO-247AC

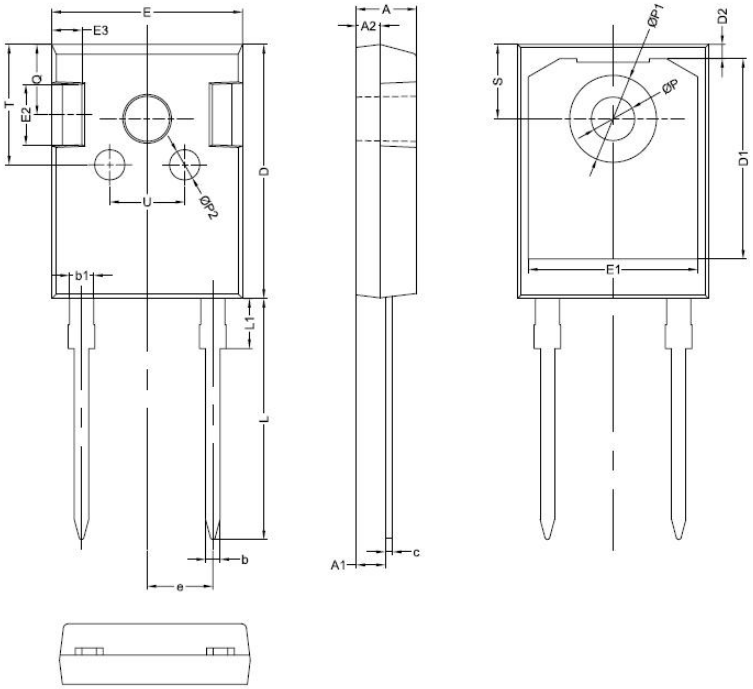


SYMBOL	Millimeters		
	MIN.	TYP.	MAX.
A	4.80	5.00	5.20
A1	2.20	2.41	2.61
A2	1.90	2.00	2.10
b	1.10	1.20	1.35
b1	1.80	2.00	2.20
c	0.50	0.60	0.75
D	20.30	21.00	21.20
D1		16.58	
D2		1.17	
E	15.60	15.80	16.00
E1		14.02	
E2		5.00	
E3		2.50	
e		5.44	
L	19.42	19.92	20.42
L1		4.13	
P	3.50	3.60	3.70
P1	7.1	7.19	7.40
P2		2.50	
Q		5.80	
S	6.05	6.15	6.25
T		10.00	
U		6.20	

Tube Specification

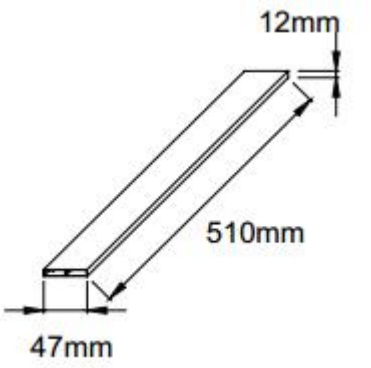

Marking Diagram



Where XXXXX is YYWWL

SDUR	= Device Type
15	= Forward Current (15A)
U	= U
120	= Reverse Voltage (1200V)
W	= Configuration
SSG	= SSG
YY	= Year
WW	= Week
L	= Lot Number

Cautions: Molding resin
Epoxy resin UL:94V-0

Ordering Information:

Device	Package	Shipping
SDUR15U120W	TO-247AC(Pb-Free)	25pcs / tube

Technical Data
Data Sheet N2394, Rev.-

RoHS

DISCLAIMER:
1- The information given herein, including the specifications and dimensions, is subject to change without prior notice to improve product characteristics. Before ordering, purchasers are advised to contact the SMC Diode Solutions sales department for the latest version of the datasheet(s).
2- In cases where extremely high reliability is required (such as use in nuclear power control, aerospace and aviation, traffic equipment, medical equipment , and safety equipment) , safety should be ensured by using semiconductor devices that feature assured safety or by means of users' fail-safe precautions or other arrangement .
3- In no event shall SMC Diode Solutions be liable for any damages that may result from an accident or any other cause during operation of the user's units according to the datasheet(s). SMC Diode Solution assumes no responsibility for any intellectual property claims or any other problems that may result from applications of information, products or circuits described in the datasheets.
4- In no event shall SMC Diode Solutions be liable for any failure in a semiconductor device or any secondary damage resulting from use at a value exceeding the absolute maximum rating.
5- No license is granted by the datasheet(s) under any patents or other rights of any third party or SMC Diode Solutions.
6- The datasheet(s) may not be reproduced or duplicated, in any form, in whole or part, without the expressed written permission of SMC Diode Solutions.
7- The products (technologies) described in the datasheet(s) are not to be provided to any party whose purpose in their application will hinder maintenance of international peace and safety nor are they to be applied to that purpose by their direct purchasers or any third party. When exporting these products (technologies), the necessary procedures are to be taken in accordance with related laws and regulations..

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

SMC:

CESD24VD5 SCT825B SF14G MBRB10200CT MBR60150CT 5.0SMCJ60CA MBR30100 SDURB860A SMBJ33CATR 83CNQ080 BZT52B5V1S MBR40200WT MBRF10100CT STD20100CE 5.0SMCJ33A MBR4080CT S8ULCC36-2 3.0SMCJ22CA MMSZ5261B SDUR1040 SDURD1030 UG2KB100 151CMQ045 183NQ100R-1 MB6F MBRF2060CT MBR1550S S2M0120120K SST24A-800BW STB60100C