
THERMOFIT • SPECIFICATION CONTROL DRAWING • MOLDED PARTS

NOTES

1. All dimensions are in inches; all angles are in degrees.
2. Dimensions appearing in table below are as follows:
   a – As supplied b – After unrestricted recovery
3. Weight shown in table of dimensions is based on polyolefin part.
4. Molding ports are optional. When specified, they will be located as shown. Order 381A115-3-00 when molding ports are required.

If this document is printed it becomes uncontrolled.
Check for the latest revision.

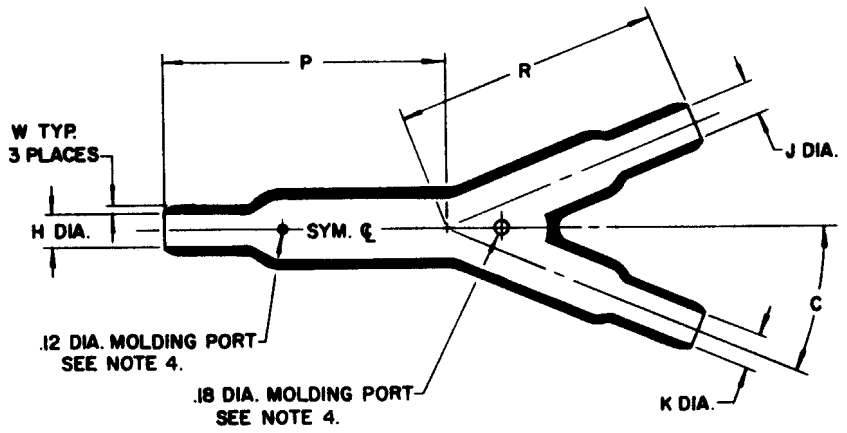

ORDERING INFORMATION

Matl. No.	Description	Rayclad Matl. Spec.	Specific Grav. Max.
3	Polyolefin	RT 301	1.40
4	Flex poly	RT 1304	1.40
5	Neoprene	RT 501	1.50
6	Silicone, flame retarded	RT 602	1.35
12	Viton	RT 1312	1.95
25	Elastomer, fluid resistant	RT 1325	

Add material number as suffix to part number;
Example – Order 381A115-3 when polyolefin is required.

TABLE OF DIMENSIONS

PART NO.	H Min a	H Max b	J and K Min a	J and K Max b	P Max a	P ±10% b	R Max a	R ±10% b	HW ±20% a	HW ±20% b	JW and KW ±20% a	JW and KW ±20% b	C ±10° a	C ±5° b	Weight lbs ±10%		
381A115-	1.12	.49	1.06	.49	—	3.44	—	3.45	—	.10	—	.10	10	22-1/2	.135		

E.O.	REV	DATE	DESCRIPTION

DRN	DD
CHK'D	KT
AUTH	RW
AUTH	HP

PART DESCRIPTION: TRANSITION, Y

PART NO. 381A115

REV LTR D

DATE May 31, 1984

Raychem

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity:

381A115-4-0 381A115-5-0 381A115-5-0-CS5075 381A115-25-0