



RoHS


REVISIONS				
SYM	ECN No.	MODIRICATION	DATE	ISSUED

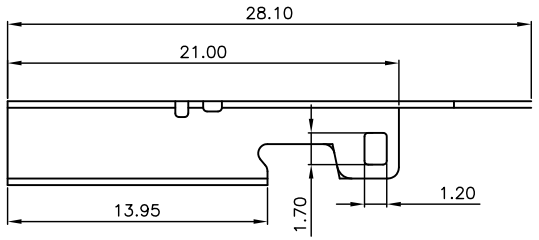



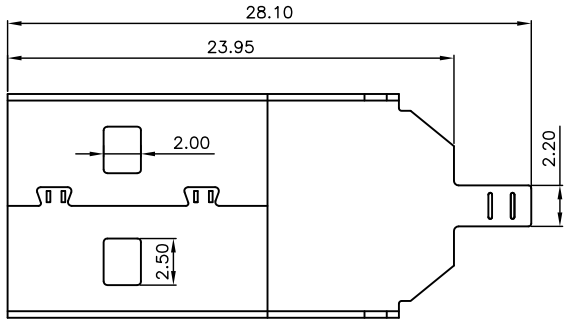

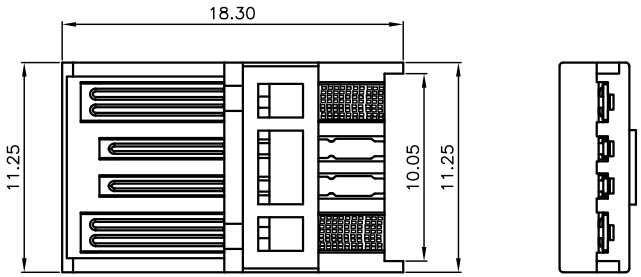

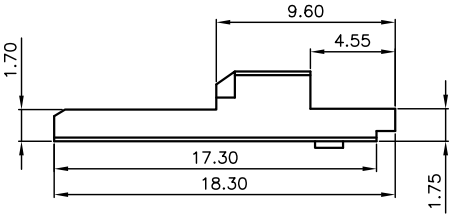

Note:

1.Material:

1.1,Housing: High temperature thermoplastic with/black g.f,UL94v-0

1.2,Contact: copper alloy,t=0.25mm

1.3,Shell: copper/Ferroalloy alloy,t=0.30mm

2.Specification:

2.1,Current rating:3A Max.

2.2,Dielectric withstanding voltage: 100 V(ac) for 1 min.

2.3,Contact resistance: 30 mΩ Max.

2.4,Insulation resistance: 100 MΩ Min.

2.5,Total mating force: 3.57 Kgf Max.

2.6,Total unmating force: 1.0 Kgf Min.


3.Finish:


3.1,Contact: Piated Golg in Mating Area: Tin On Solder Talls


Shell: Nickel Plating

4.Environmental:

4.1,Temperature range: -55°C~85°C

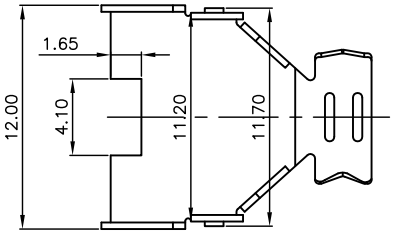



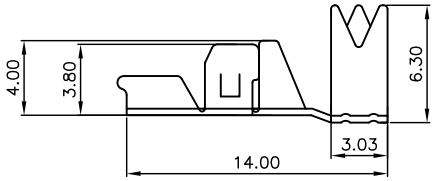

DRAWN	JTJ 深圳市精拓金电子有限公司					
CHECKED	TITLE: AM大电流三件式铁壳 PBT红色OD4.0/5A	PART NO.: 917-701A110DM0400				
APPROVED		DRAWING NO.: --				
3rd ANGLE PROJECTION	UNIT: mm	TOLERANCE: .XXX±.10, .XX±.15, .X±.25, ANG±1°	SCALE: 1:1	SHEET: 1 OF 1	SIZE: A4	REV.: X1

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Jing extension:

920-F52A2021S10105 906-752B1114D10200 907-312A1101Y10210 906-262A1021D10200
912-312A1012D10100 918-318K2023C40005 920-A64A2091S101A3 908-351A1011D10100
912-112A1011D10100 917-B88C201AH70201 918-468K2029Y50000 920-A62A2021S10104
904-232A2031S10100 910-151A2021D10100 918-415K3028S40000 920-C62A2021S10103
904-331B2032S10200 912-112A2021S10100 919-162A1012D10400 920-A62A2021S10108
917-P81A202ES60201 907-111A1022D10200 911-221A2021S10100 916-151A1022Y10200
920-C52A2021S10105 904-232B2032S10100 905-761A2032S10200 906-552A1012D10200
918-418K2022Y40011 920-154A2021Y10110