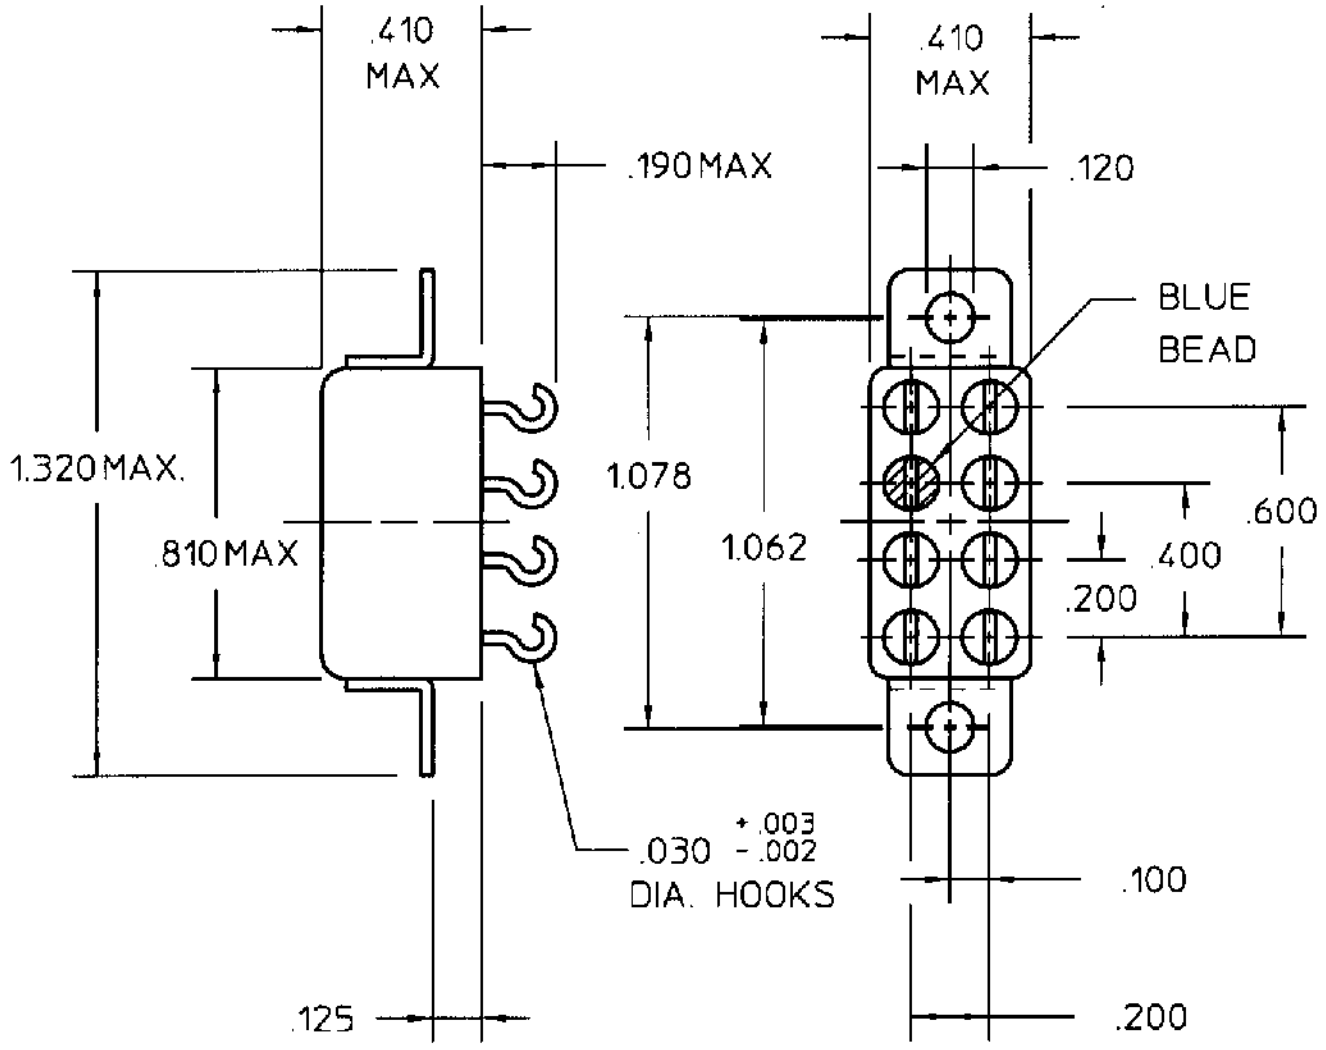


COIL: @ +25 °C

RESISTANCE	1030 OHMS ± 10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	11.4 VDC
MUST RELEASE	6.9 VDC MAX. 1.1 VDC MIN.

ENVIRONMENT:


VIBRATION 10 CPS TO 2500 CPS @ 20 g's

SHOCK 50 g's 11 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE 6 MS MAX.
RELEASE 5 MS MAX.
CONTACT BOUNCE 2 MS MAX.

CUSTOMER DATA SHEET

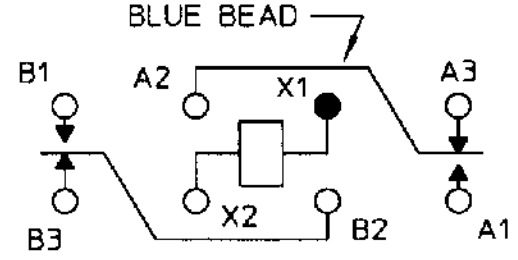

CONTACT RATING: LOW LEVEL TO 2 AMPS 28 VDC RESISTIVE
0.5 AMP 28 VDC INDUCTIVE
100,000 OPERATIONS

DR. R.B. 2/13/98 CK 2/13/98

COMMUNICATIONS INSTRUMENTS, INC.

CUST. QPL
CUST. NO. M39016/44-028L

TYPE "HMS" RELAY

HMS1130S04L

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity:

HMS1130S04L