
Rocker Switch | **SRB1-1D-DC-1-NN**


SWITCH COMPONENTS

Mechanical Dimensions (mm)

Tolerances ±0.3 Unless Otherwise Specified

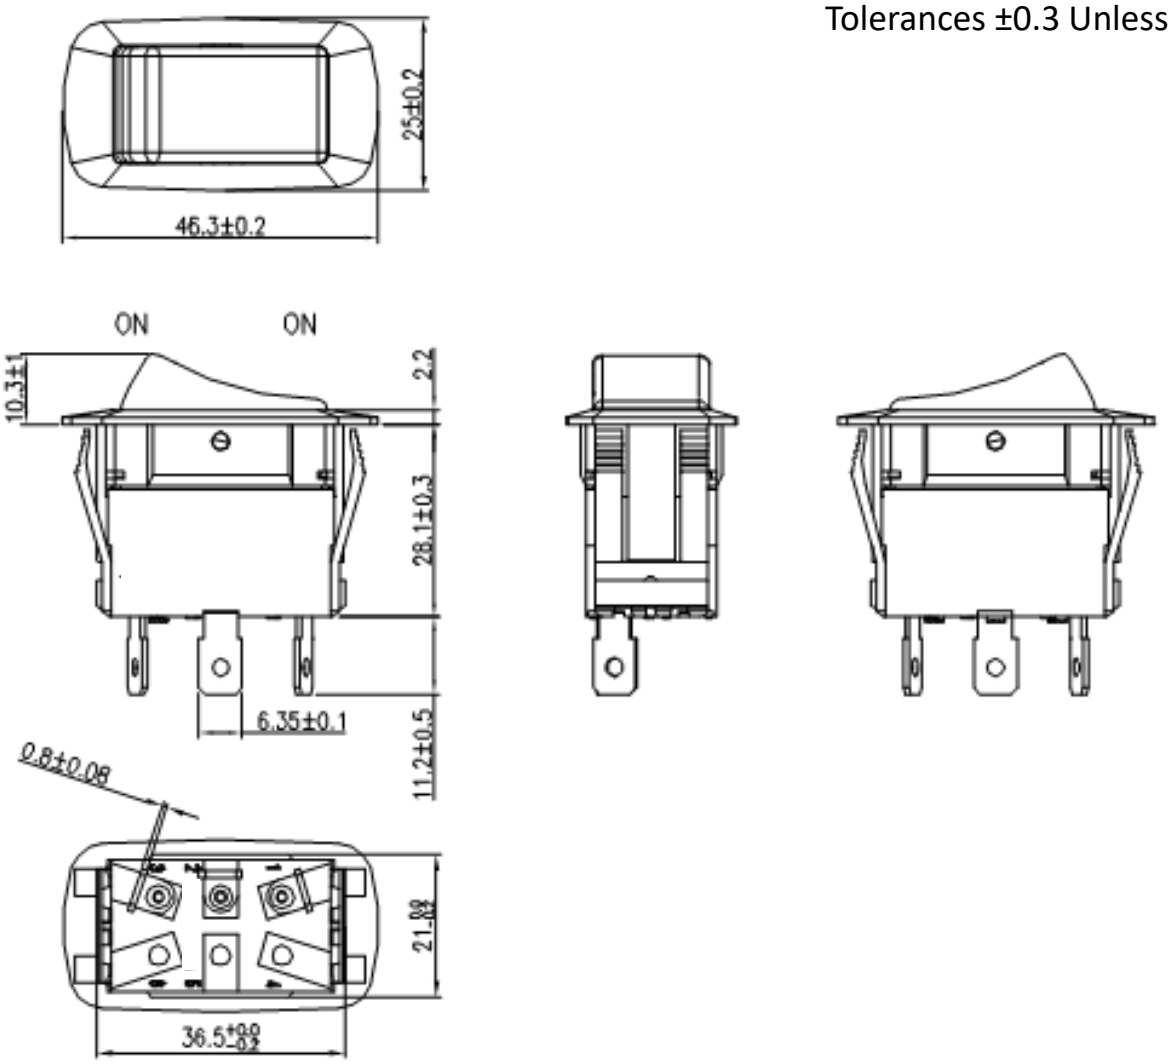

Mounting Hole

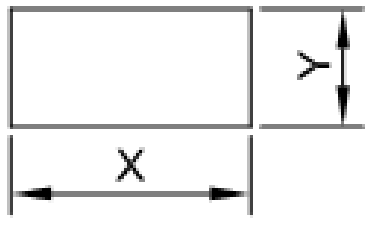

Thickness	X	Y
0.75~1.25	21.2+0.1	36.6+0.2
1.25~2.0	21.2+0.1	36.8+0.2
2.0~3.0	21.2+0.1	37.0+0.2

Circuit Diagram

3P SPDT ON-ON



Electrical Specifications

Rating	21A 14V DC, 10A 28V DC
Contact Resistance	50m ohm Max.
Insulation Resistance	DC 500V 100M ohm Min.
Dielectric Strength	AC 1500V 1 minute
Operation Temperature	-20°C~85°C

Material Specifications

Frame	Black, Nylon 66
Actuator	Black, Nylon 66+33%GF
Waterproof	IP56

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Switch Components:

RF3-1A-DC-2-GL SRB1-1G-DC-1-NN TE3-1A-DC-1-AL PD-1E-DC-9-UL SB-1B-DC-3-R TA1-1A-DC-4 TB1-2H-DC-6 TE6-1A-DC-1-UL RF1-1A-DC-2-B-3 PB-1A-DC-2-B PB-1B-DC-2-RIL SRC1-1B-DC-1-B TA2-1A-DC-5 SRD2-2F-DC-1-BNN TA2-1G-DC-6-O TE1-1F-DC-1-PB PB-1A-DC-2-RDL RC-1A-DC-1-AL SRD1-2A-DC-1-BGN WR1 RG3-1A-DC-1-B SC-B RA4-2A-DC-2-AL SB-1B-DC-3-B SRA1-1A-DC-1-NN-2 SRA1-2F-DC-1-NN SRD2-1G-DC-1-BNN SRD2-2F-DC-1-RNN TC6-P1-Z RD2-1A-DC-1-AL