

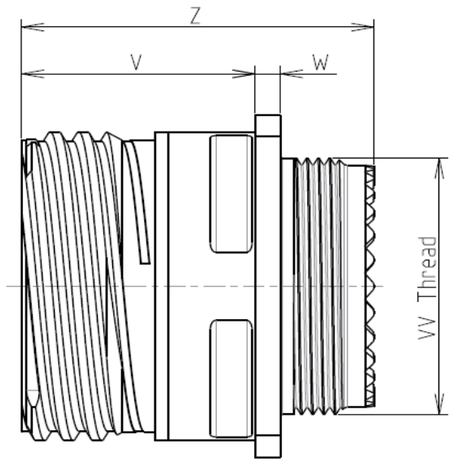


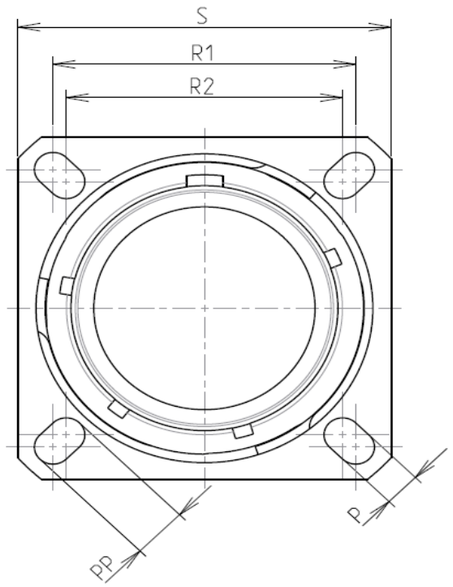

Keying Shown as example

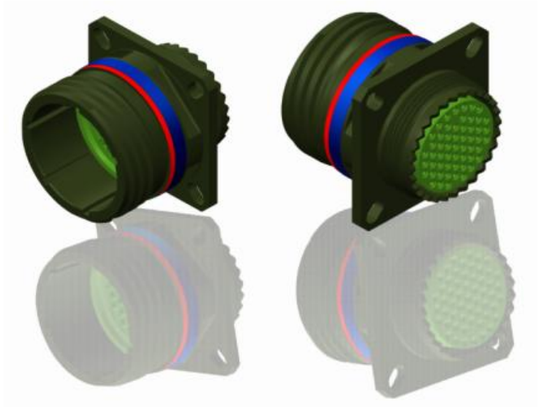

LAYOUT SHOWN AS EXAMPLE

CHARACTERISTICS

-Standard : Based on MIL-DTL-38999 Series III
-Shell Material : Aluminium
-Shell Plating : Olive drab Cadmium
-Insulator : Thermoplastic
-Contacts : Copper Alloy
-Seals & Grommet : Silicon Elastomer
-Contact Plating : Gold over copper Alloy 0.8µm minimum
-Durability : 500 Mating cycles
-Delivered with Souriau contacts and Accessories
-Temperature Range : -65°C to +175°C
-Salt Spray : 500 hours

Connector dimension	
Dim	**Nominal**
P	3.25±0.2
PP	4.93±0.2
R1	31.75
R2	29.36
S	39.7±0.3
V	20.07+0/-1.25
W	2.1/3.2
Z	31.5 Max
VV THREAD	M31x1-6g

BASIC SERIES:	8D	0	-	21	W	77	P	N
SHELL TYPE : Square Flange Receptacle								
CONTACT TYPE : Standard Crimp Contact								
SHELL SIZE : 21								
PLATING : W = Olive drab Cadmium								
								ORIENTATION : N
								CONTACT TYPE : PIN(500 Matings)
								CONTACT LAYOUT : 21-77

SOURIAU shall not be liable for any non-conformity or damage
due to a use of the Products which does not comply with
the Specifications issued by either of the Parties or by a third party
(professional recommendation, technical notice.)

Country	Jurisdiction & Control List
FR	Not Listed

PN: 8D021W77PN

ISS	DATE	Latest modification - by	MOD N°
A	02-11-2016	First Release	

Designed By: Date: **CUSTOMER DRAWING**

TITLE Aluminium Receptacle 8D series


SCALE NA | General linear Tolerances: ±-- | NPRDS / PROJECT **859**

SOURIAU WWW.SOURIAU.COM

This document is the property of SOURIAU
it must not be reproduced or communicated without permission

FORMAT A3 | SOURIAU DRG N° 8D021W77PN-C | SHEET 1/2

Contact Layout




(Inactive for new design for MIL-DTL-38999. For new design, use arrangement no. 21-76.)

Contacts (Insert arrangement 21-75)		
Contact position ID	Location	
	X axis	Y axis
A	+.180 (4.57)	+.180 (4.57)
B	+.180 (4.57)	-.180 (4.57)
C	-.180 (4.57)	-.180 (4.57)
D	-.180 (4.57)	+.180 (4.57)


Shell size	Arrangement no.	Number of contacts	Size contacts	Service rating	Contact location	Standard contact	
						Pin	Socket
21	-75	4	8 (see note)	Twinax	All	M39029/90-529	M39029/91-530

Panel Cutout

SQUARE FLANGE RECEPTACLE (TYPE 0)
REAR MOUNTING

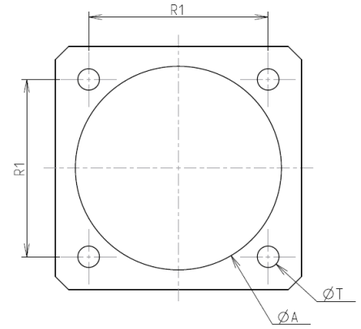

SQUARE FLANGE RECEPTACLE (TYPE 0)
FRONT MOUNTING

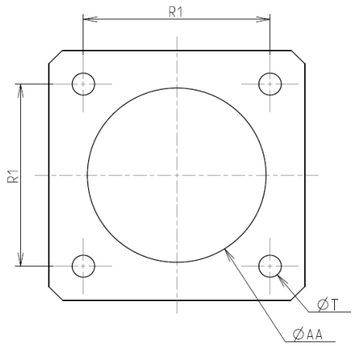

Dim	Nominal
ØA	36.12 min
ØAA	32.16 min
R1	31.75
ØT	3.25 ±0.13

SOURIAU shall not be liable for any non-conformity or damage
due to a use of the Products which does not comply with
the Specifications issued by either of the Parties or by a third party
(professional recommendation, technical notice.)

Country	Jurisdiction & Control List
FR	Not Listed

PN: 8D021W77PN

ISS	DATE	Latest modification - by	MOD N°
A	02-11-2016	First Release	

Designed By: Date: **CUSTOMER DRAWING**

TITLE Aluminium Receptacle 8D series

SCALE NA | General linear Tolerances: ±-- | NPRDS / PROJECT **859**

SOURIAU WWW.SOURIAU.COM

This document is the property of SOURIAU
it must not be reproduced or communicated without permission

FORMAT A3 | SOURIAU DRG N° 8D021W77PN-C | SHEET 2/2

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Souriau-Sunbank:

UTG11412PH UTS6JC1823S 8D525M24PN 8MQ2M0412ABE RM28M1K UTS10DCGE 8MQ2M0412RCE UTL6122G1W5P UTS6JC1823P 8MQ2M0412PB 8MQ2M1220AD D38999/26JJ24PN D38999/26MJ24PN-LC UT001412SH UT010LPGN 8MQ2M01L28ADE UT061619SH UTG22PG UTGX1JC103P UTGX71419P BIS10PLN0416M SC20WL-3S25 SC24ML-1D70 UTP14DCG UTS08E3P 8MQ2M0816BCE SC24WL-3S25 UTSX0128P SM16ML-1S6 UT0S16JCS