




REV.	DATE	DESCRIPTION
NC	08/05/99	INITIAL RELEASE

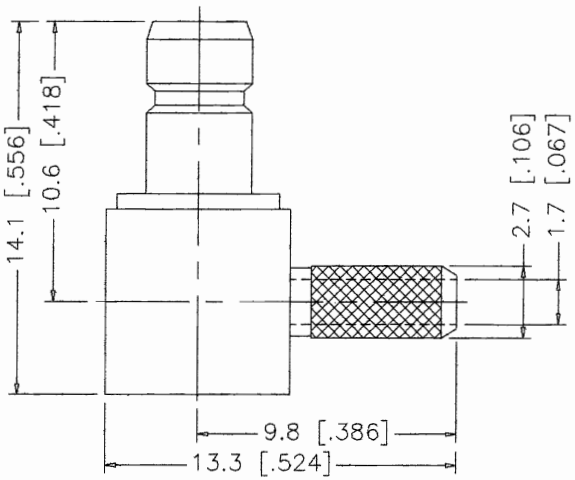



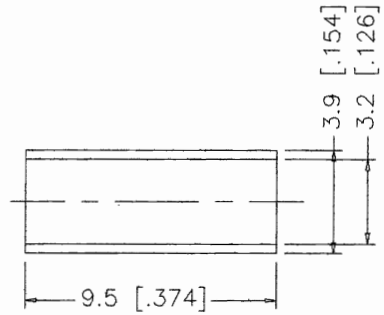

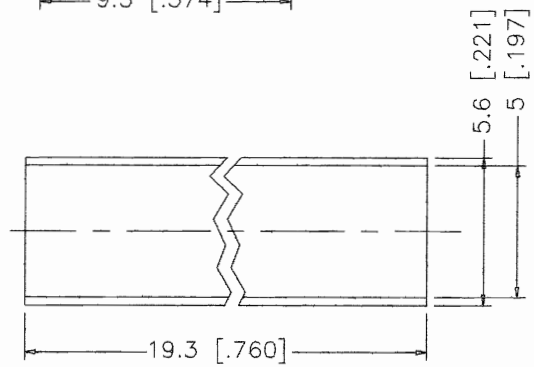

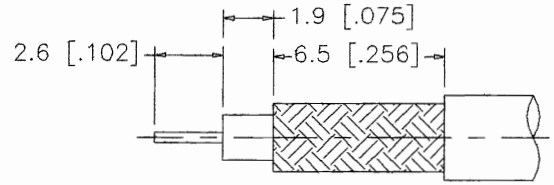

RECOMMENDED CABLE STRIPPING DIM'S

	DESCRIPTION	MATERIAL	FINISH
1	BODY/BARREL	BRASS	NICKEL
2	INSULATOR	TEFLON	NATURAL
3	CONTACT PIN	BRASS	GOLD
4	FERRULE	COPPER	NICKEL
5	HEAT SHRINK TUBE		
6			
7			
8			

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS

DIMENSIONS IN [ ] ARE IN INCHES FOR CUSTOMER REFERANCE ONLY

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:

0.5–6 = ± 0.2
6–30 = ± 0.4
30–120 = ± 0.6
120–315 = ± 1
315–1000 = ± 1.6
1000–2000 = ± 2.4

DO NOT SCALE DRAWING

APPROVALS		DATE
DRAWN	G.R.S.	08/05/99
CHECKED		
ISSUED		

Connector Corporation

TITLE: SMB R/A CRIMP JACK (FOR RG–174/U, 188A/U, 316/U CABLE)

SIZE	FSCM NO.	DWG. NO.	REV.
A	99001	142251.DWG	NC

SCALE	PART NO.	SHEET
NA	142251	1 OF 1

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Amphenol:

DEM09P032N 67996-204HLF 69192-408HLF 70218-1116LF 86130202123355E1LF 95157-140LF 68001-108HLF 68002116HLF 86093968191755E3LF CD15S13E4RV09LF D15P13A6RV12LF 70430-164LF 86093488314745V1LF 86093968813H45V1LF LD25S33E4GV00LF 54202-S08-07LF 76384-316LF 91614-403ALF 86093967896755LF 863013A DCMF37P RJE061661210 RJSBE5080C2 54202-G0805CLF 65781-158 68000-236HLF DAPO15S365TLF LD15P33E4GV00LF 68001-200HLF 70234-112LF