





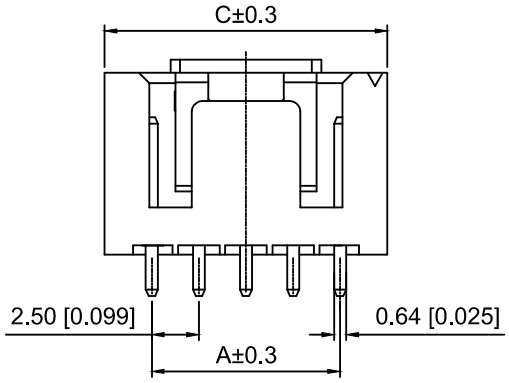







Recommended PCB Layout(Top view)
Tolerance:±0.05mm

Specifications:
规格：
Voltage rating:250V AC/DC
额定电压：250V AC/DC
Current rating:3A AC/DC
额定电流：3A AC/DC
Withstanding voltage:800V AC/minute
耐受电压：800V AC/分钟
Temperature range:-25℃-+85℃
温度范围：-25℃-+85℃
Insulation resistance:≥1000MΩ
绝缘电阻：≥1000MΩ
Contact resistance:≤30mΩ
接触电阻：≤30mΩ

X8826 W V - 2x04 R - LP SN
① ② ③ ④ ⑤ ⑥ ⑦

1.Series No
2.Category:W-Wafer
3.Welding Board Angle:V-Stright 180°
4.Row No.Pin No:2xXX-2x02~2x12Pin
5.Special No:R-DIP 2.2mm
6.Material:LP-LCP UL94V-0 ,Natural
7.Plating:SN- Tin Plated

Poles	Dimensions（mm）			Poles	Dimensions（mm）		
	A	B	C		A	B	C
2x02	2.50	5.70	7.50	2x08	17.50	20.70	22.50
2x03	5.00	8.20	10.00	2x09	20.00	23.20	25.00
2x04	7.50	10.70	12.50	2x10	22.50	25.70	27.50
2x05	10.00	13.20	15.00	2x11	25.00	28.20	30.00
2x06	12.50	15.70	17.50	2x12	27.50	30.70	32.50
2x07	15.00	18.20	20.00				

X8826WV-2x04R-LPSN	LCP	Brass	X8826H
PART N0	Material	Material(Pin)	Suitable XKB Housing

MARK	DESCRIPTION	DATE	REVISED	APPROVED
ΔX				
ΔX				
ΔX				

REVISIONS

ANGLAR	±5°
L≤ 4	±0.2
4<L≤ 16	±0.3
16<L≤ 63	±0.4
L> 63	±0.5

UNSPECIFIED TOLERANCES

www.helloxkb.com www.helloxkb.cn www.xk-dg.cn

XKB INDUSTRIAL PRECISION CO.,LIMITED

DSND		SCALE: N/A	MODEL TYPE: 2.5mm Crimp Style Connector
DWN		VIEW:	PART NO.: X8826WV-2x04R-LPSN
CHKD		UNIT: mm/in	DWG NO.: X-X8826WV-2x04R-LPSN
APPD		SIZE: A4	

WEIGHT	SHEET	REVISION
	1/1	A0