


由 Autodesk 教育版产品制作


MAPX	MODIFICATION	DATE

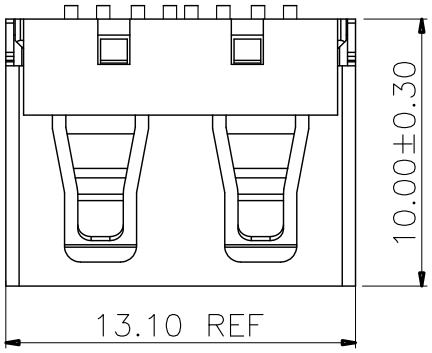

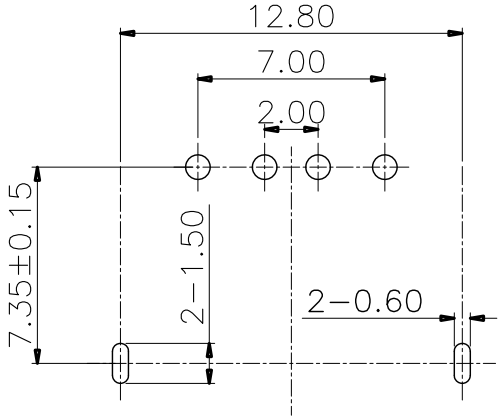

PCB HOLES(THE PATTERN SIDE) t=1.6mm
NOTE: GENERAL TOLERANCE: ±0.1mm

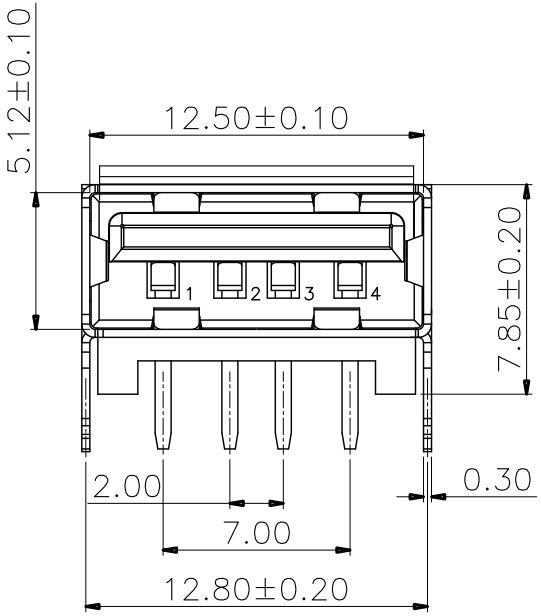

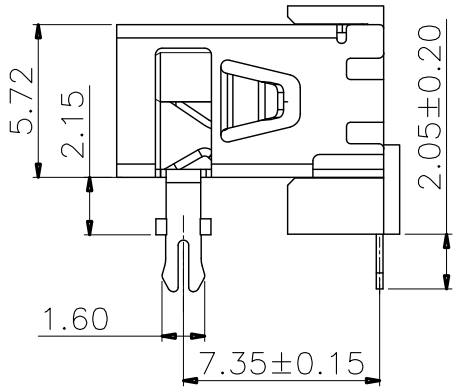

NOTES:
1. HOUSING: SEE NOTES,
TERMINAL: SEE NOTES.
SHELL: SEE NOTES.

SPECIFICATION:
1. ELECTRICAL CHARACTERISTIC:
CONTACT RESISTANCE: 30MΩ MAX
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1MIN
INSULATION RESISTANCE: 1000MΩ MIN
2. MECHANICAL CHARACTERISTIC:
INSERTION FORCE: 35N(3.57KGF) MAX
EXTRACTION FORCE: 10~35N(1.02~3.57KGF)MIN
DURABILITY: 1500 CYCLES EXTRACTION FORCE:10~35N
5000 CYCLES MIN
5000 CYCLES EXTRACTION FORCE:3~35N
3. ENVIRONMENTAL:
OPERATING TEMPERATURE: -55℃+85℃
4. Contact finish:
01:Selective Gold Flash
02:Selective Gold 3U″
03:Selective Gold 5U″
04:Selective Gold 15U″
05:Selective Gold 30U″

产品图
PRODUCT CHART DWG

公差一览表 TOLERANCE UNLESS OTHERWISE

X	±0.25	X	±5.°
.X	±0.20	.X	±2.°
.XX	±0.15	.XX	±1.°
.XXX	±0.10	.XXX	±0.5°

深圳市精拓金电子有限公司

单位 UNITS	MM	制图 DRAWING	Z-Y-B	制图料号 PRODUCT PART NO.	909-162A1025D10200
比例 SCALE	1:1	审核 CHKD		产品名称 PRODUCT NO.	AF10.0B款前两脚无边铜壳PBT黑胶 7.8DIP无耳朵
日期 DATE	2015.02.04	核准 APPD		角法 VIEW	版本 VER A0

由 Autodesk 教育版产品制作

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Jing extension:

912-112A1011D10100 912-112A2021S10100 912-312A1012D10100 920-154A2021Y10110
920-F52A2021S10105 906-262A1021D10200 906-552A1012D10200 918-418K2022Y40011
904-232B2032S10100 920-C52A2021S10105 904-232A2031S10100 905-761A2032S10200
907-111A1022D10200 908-351A1011D10100 911-221A2021S10100 917-B88C201AH70201
917-P81A202ES60201 918-415K3028S40000 916-151A1022Y10200 918-318K2023C40005
919-162A1012D10400 920-A64A2091S101A3 920-C62A2021S10103 904-331B2032S10200
906-752B1114D10200 910-151A2021D10100 907-312A1101Y10210 918-468K2029Y50000
920-A62A2021S10104 920-A62A2021S10108