Cree® XLamp® CXA1512 LED



PRODUCT DESCRIPTION

The XLamp® CXA1512 LED array expands Cree's family of high-flux, multi-die arrays in a smaller, easy-to-use platform. With XLamp LED lighting-class reliability, the CXA1512's small, uniform emitting surface enables both directional and non-directional lighting applications including lamp retrofit and luminaire designs. Available in 2-step, 3-step and 4-step color consistency, and featuring a 9-mm optical source, the CXA1512 brings new levels of flux and efficacy to this form factor.

The CX Family LED Design Guide provides basic information on the requirements to use the CXA1512 LED successfully in luminaire designs.

FEATURES

- Available in 4-step, 3-step and 2-step EasyWhite® bins at 2700 K, 3000 K, 3500 K, 4000 K & 5000 K CCT and 4-step EasyWhite bins at 5700 K & 6500 K CCT
- Available in ANSI white bins at 4000 K, 5000 K, 5700 K & 6500 K CCT
- Available in 70-, 80-, 90- and 93-minimum CRI options
- Forward voltage options: 18-V class & 36-V class
- 85 °C binning and characterization
- Maximum drive current: 1200 mA (18 V), 600 mA (36 V)
- 115° viewing angle, uniform chromaticity profile
- Top-side solder connections
- Thermocouple attach point
- NEMA SSL-3 2011 standard flux bins
- RoHS and REACh compliant
- UL® recognized component (E349212)

TABLE OF CONTENTS

Characteristics 2
Operating Limits 3
Flux Characteristics, EasyWhite® Order Codes and Bins - 18 V 4
Flux Characteristics, ANSI White Order Codes and Bins - 18 V 7
Flux Characteristics, EasyWhite® Order Codes and Bins - 36 V 8
Flux Characteristics, ANSI White Order Codes and Bins - 36 V 11
Relative Spectral Power Distribution 12
Electrical Characteristics 13
Relative Luminous Flux 14
Typical Spatial Distribution 16
Performance Groups - Brightness 16
Performance Groups - Chromaticity 17
Cree EasyWhite® Bins Plotted on the 1931 CIE Color Space 20
Cree ANSI White Bins Plotted on the 1931 CIE Color Space 20
Bin and Order Code Formats 21
Mechanical Dimensions 21
Thermal Design 22
Notes 24
Packaging 25

Copyright © 2012-2017 Cree, Inc. All rights reserved. The information in this document is subject to change without notice. Cree®, XLamp® and EasyWhite® are registered trademarks and the Cree logo is a trademark of Cree, Inc. UL® and the UR logo are registered trademarks of UL LLC.

Cree, Inc.
4600 Silicon Drive
Durham, NC 27703
USA Tel: +1.919.313.5300

CHARACTERISTICS


Characteristics	Unit	Minimum	Typical	Maximum
Viewing angle (FWHM)	degrees		115	
ESD withstand voltage (HBM per Mil-Std-883D)	V			8000
DC forward current (18 V)	mA			1200*
DC forward current (36 V)	mA			600*
Reverse current (18 V, 36 V)	mA			0.1
Forward voltage (18 V, @ 700 mA, 85 °C)	V		18.2	
Forward voltage (18 V, @ 700 mA, 25 °C)	V			21
Forward voltage (36 V, @ 350 mA, 85 °C)	V		36.4	
Forward voltage (36 V, @ 350 mA, 25 °C)	V			42


* Refer to the Operating Limits section.

Copyright © 2012-2017 Cree, Inc. All rights reserved. The information in this document is subject to change without notice. Cree®, XLamp® and EasyWhite® are registered trademarks and the Cree logo is a trademark of Cree, Inc. UL® and the UR logo are registered trademarks of UL LLC.

OPERATING LIMITS

The maximum current rating of the CXA1512 is dependent on the case temperature (Tc) when the LED has reached thermal equilibrium under steady-state operation. The graphs shown below assume that the system design employs good thermal management (thermal interface material and heat sink) and may vary when poor thermal management is employed. Please refer to the Mechanical Dimensions section on page 21 for the location of the Tc measurement point.

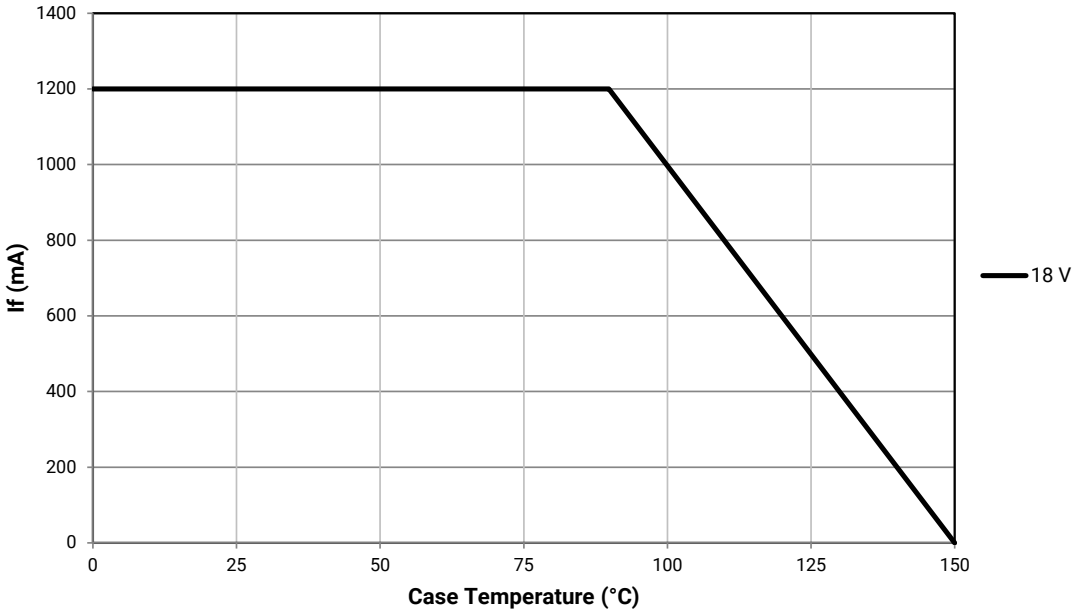

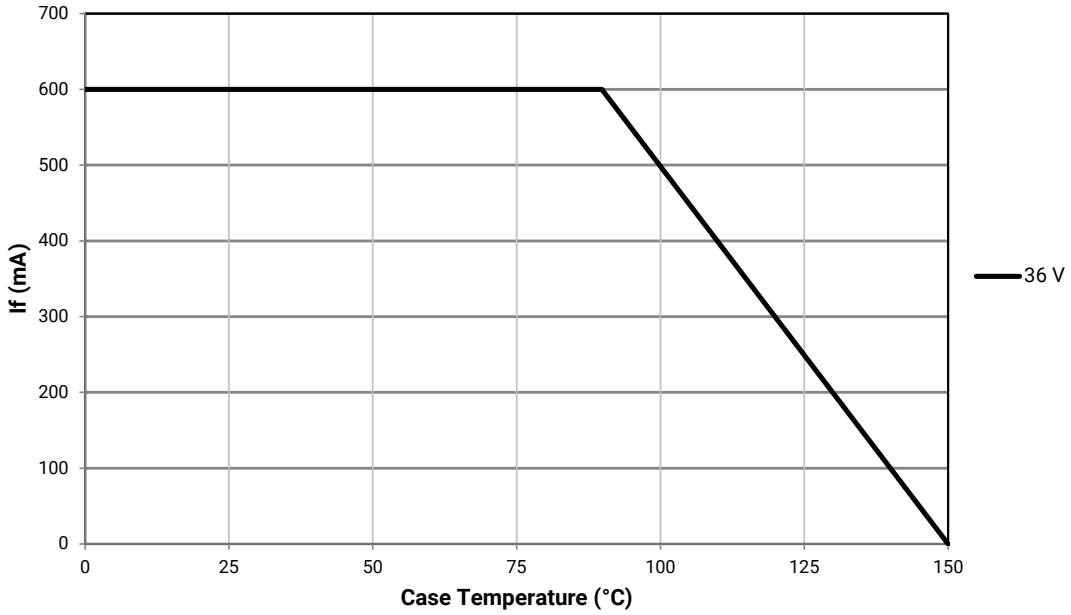

Copyright © 2012-2017 Cree, Inc. All rights reserved. The information in this document is subject to change without notice. Cree®, XLamp® and EasyWhite® are registered trademarks and the Cree logo is a trademark of Cree, Inc. UL® and the UR logo are registered trademarks of UL LLC.

FLUX CHARACTERISTICS, EASYWHITE® ORDER CODES AND BINS - 18 V (I_F = 700 mA, T_J = 85 °C)

The following table provides order codes for XLamp CXA1512 LEDs. For a complete description of the order code nomenclature, please see the Bin and Order Code Formats section (page 21).

Nominal CCT	CRI		Minimum Luminous Flux			2-Step		3-Step		4-Step	
	Min	Typ	Group	Flux (lm) @ 85 °C	Flux (lm) @ 25 °C*	Group	Order Code	Group	Order Code	Group	Order Code
6500 K	70	75	M2	1380	1563						CXA1512-0000-000F00M265F
			M4	1485	1682					65F	CXA1512-0000-000F00M465F
			N2	1590	1710						CXA1512-0000-000F00N265F
	80	---	M2	1380	1563						CXA1512-0000-000F0HM265F
			M4	1485	1685					65F	CXA1512-0000-000F0HM465F
			N2	1590	1710						CXA1512-0000-000F0HN265F
5700 K	70	75	M2	1380	1563						CXA1512-0000-000F00M257F
			M4	1485	1682					57F	CXA1512-0000-000F00M457F
			N2	1590	1710						CXA1512-0000-000F00N257F
	80	---	M2	1380	1563						CXA1512-0000-000F0HM257F
			M4	1485	1682					57F	CXA1512-0000-000F0HM457F
			N2	1590	1710						CXA1512-0000-000F0HN257F
5000 K	70	75	M2	1380	1563	50H	CXA1512-0000-000F00M250H				CXA1512-0000-000F00M250F
			M4	1485	1682	50H	CXA1512-0000-000F00M450H			50F	CXA1512-0000-000F00M450F
			N2	1590	1710	50H	CXA1512-0000-000F00N250H				CXA1512-0000-000F00N250F
	80	---	M2	1380	1563	50H	CXA1512-0000-000F0HM250H				CXA1512-0000-000F0HM250F
			M4	1485	1682	50H	CXA1512-0000-000F0HM450H	50G	CXA1512-0000-000F0HM450G	50H	CXA1512-0000-000F0HM450F
			N2	1590	1710	50H	CXA1512-0000-000F0HN250H	50G	CXA1512-0000-000F0HN250G		CXA1512-0000-000F0HN250F
	90	95	J4	1120	1269	50H	CXA1512-0000-000F0UJ450H	50G	CXA1512-0000-000F0UJ450G		CXA1512-0000-000F0UJ450F
			K2	1200	1359	50H	CXA1512-0000-000F0UK250H	50G	CXA1512-0000-000F0UK250G	50F	CXA1512-0000-000F0UK250F
			K4	1290	1461	50H	CXA1512-0000-000F0UK450H	50G	CXA1512-0000-000F0UK450G		CXA1512-0000-000F0UK450F

Notes

- Cree maintains a tolerance of ±7% on flux and power measurements, ±0.005 on chromaticity (CCx, CCy) measurements and a tolerance of ±2 on CRI measurements. See the Measurements section (page 24).
- Cree XLamp CXA1512 LED order codes specify only a minimum flux bin and not a maximum. Cree may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity bin restrictions specified by the order code.

* Flux values @ 25 °C are calculated and for reference only.

Copyright © 2012-2017 Cree, Inc. All rights reserved. The information in this document is subject to change without notice. Cree®, XLamp® and EasyWhite® are registered trademarks and the Cree logo is a trademark of Cree, Inc. UL® and the UR logo are registered trademarks of UL LLC.

FLUX CHARACTERISTICS, EASYWHITE® ORDER CODES AND BINS - 18 V (I_F = 700 mA, T_J = 85 °C) - CONTINUED

Nominal CCT	CRI		Minimum Luminous Flux			2-Step		3-Step		4-Step	
	Min	Typ	Group	Flux (lm) @ 85 °C	Flux (lm) @ 25 °C*	Group	Order Code	Group	Order Code	Group	Order Code
4000 K	70	75	M2	1380	1563	40H	CXA1512-0000-000F00M240H			40F	CXA1512-0000-000F00M240F
			M4	1485	1682		CXA1512-0000-000F00M440H				CXA1512-0000-000F00M440F
			N2	1590	1710		CXA1512-0000-000F00N240H				CXA1512-0000-000F00N240F
	80	---	K4	1290	1461	40H	CXA1512-0000-000F0HK440H	40G		40F	CXA1512-0000-000F0HK440F
			M2	1380	1563		CXA1512-0000-000F0HM240H		CXA1512-0000-000F0HM240G		CXA1512-0000-000F0HM240F
			M4	1485	1682		CXA1512-0000-000F0HM440H		CXA1512-0000-000F0HM440G		CXA1512-0000-000F0HM440F
	90	95	J2	1040	1178	40H	CXA1512-0000-000F0UJ240H	40G	CXA1512-0000-000F0UJ240G	40F	CXA1512-0000-000F0UJ240F
			J4	1120	1269		CXA1512-0000-000F0UJ440H		CXA1512-0000-000F0UJ440G		CXA1512-0000-000F0UJ440F
			K2	1200	1359		CXA1512-0000-000F0UK240H		CXA1512-0000-000F0UK240G		CXA1512-0000-000F0UK240F
3500 K	80	---	K4	1290	1461	35H	CXA1512-0000-000F00K435H	35G		35F	CXA1512-0000-000F00K435F
			M2	1380	1563		CXA1512-0000-000F00M235H		CXA1512-0000-000F00M235G		CXA1512-0000-000F00M235F
			M4	1485	1682		CXA1512-0000-000F00M435H		CXA1512-0000-000F00M435G		CXA1512-0000-000F00M435F
	93	95	H4	970	1099	35H	CXA1512-0000-000F0YH435H	35G	CXA1512-0000-000F0YH435G	35F	CXA1512-0000-000F0YH435F
			J2	1040	1178		CXA1512-0000-000F0YJ235H		CXA1512-0000-000F0YJ235G		CXA1512-0000-000F0YJ235F
			J4	1120	1269		CXA1512-0000-000F0YJ435H		CXA1512-0000-000F0YJ435G		CXA1512-0000-000F0YJ435F
3000 K	80	---	K4	1290	1461	30H	CXA1512-0000-000F00K430H	30G		30F	CXA1512-0000-000F00K430F
			M2	1380	1563		CXA1512-0000-000F00M230H		CXA1512-0000-000F00M230G		CXA1512-0000-000F00M230F
			M4	1485	1682		CXA1512-0000-000F00M430H		CXA1512-0000-000F00M430G		CXA1512-0000-000F00M430F
	93	95	H4	970	1099	30H	CXA1512-0000-000F0YH430H	30G		30F	CXA1512-0000-000F0YH430F
			J2	1040	1178		CXA1512-0000-000F0YJ230H		CXA1512-0000-000F0YJ230G		CXA1512-0000-000F0YJ230F
			J4	1120	1269		CXA1512-0000-000F0YJ430H		CXA1512-0000-000F0YJ430G		CXA1512-0000-000F0YJ430F

Notes

- Cree maintains a tolerance of ±7% on flux and power measurements, ±0.005 on chromaticity (CCx, CCy) measurements and a tolerance of ±2 on CRI measurements. See the Measurements section (page 24).
- Cree XLamp CXA1512 LED order codes specify only a minimum flux bin and not a maximum. Cree may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity bin restrictions specified by the order code.

* Flux values @ 25 °C are calculated and for reference only.

Copyright © 2012-2017 Cree, Inc. All rights reserved. The information in this document is subject to change without notice. Cree®, XLamp® and EasyWhite® are registered trademarks and the Cree logo is a trademark of Cree, Inc. UL® and the UR logo are registered trademarks of UL LLC.

FLUX CHARACTERISTICS, EASYWHITE® ORDER CODES AND BINS - 18 V (I_F = 700 mA, T_J = 85 °C) - CONTINUED

Nominal CCT	CRI		Minimum Luminous Flux			2-Step		3-Step		4-Step	
	Min	Typ	Group	Flux (lm) @ 85 °C	Flux (lm) @ 25 °C*	Group	Order Code	Group	Order Code	Group	Order Code
2700 K	80	---	K2	1200	1359	27H	CXA1512-0000-000F00K227H	27G		27F	CXA1512-0000-000F00K227F
			K4	1290	1461		CXA1512-0000-000F00K427H		CXA1512-0000-000F00K427G		CXA1512-0000-000F00K427F
			M2	1380	1563		CXA1512-0000-000F00M227H		CXA1512-0000-000F00M227G		CXA1512-0000-000F00M227F
	93	95	H2	900	1019	27H	CXA1512-0000-000F0YH227H	27G		27F	CXA1512-0000-000F0YH227F
			H4	970	1099		CXA1512-0000-000F0YH427H		CXA1512-0000-000F0YH427G		CXA1512-0000-000F0YH427F
			J2	1040	1178		CXA1512-0000-000F0YJ227H		CXA1512-0000-000F0YJ227G		CXA1512-0000-000F0YJ227F

Notes

- Cree maintains a tolerance of ±7% on flux and power measurements, ±0.005 on chromaticity (CCx, CCy) measurements and a tolerance of ±2 on CRI measurements. See the Measurements section (page 24).
- Cree XLamp CXA1512 LED order codes specify only a minimum flux bin and not a maximum. Cree may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity bin restrictions specified by the order code.

* Flux values @ 25 °C are calculated and for reference only.

Copyright © 2012-2017 Cree, Inc. All rights reserved. The information in this document is subject to change without notice. Cree®, XLamp® and EasyWhite® are registered trademarks and the Cree logo is a trademark of Cree, Inc. UL® and the UR logo are registered trademarks of UL LLC.

FLUX CHARACTERISTICS, ANSI WHITE ORDER CODES AND BINS - 18 V (I_F = 700 mA, T_J = 85 °C)

The following table provides order codes for XLamp CXA1512 LEDs. For a complete description of the order code nomenclature, please see the Bin and Order Code Formats section (page 21).

Nominal CCT	CRI		Minimum Luminous Flux			Chromaticity Regions	Order Code
	Min	Typ	Group	Flux (lm) @ 85 °C	Flux (lm) @ 25 °C*		
6500 K	70	75	M2	1380	1563	1A0, 1B0, 1C0, 1D0, 65F	CXA1512-0000-000F00M20E1
			M4	1485	1685		CXA1512-0000-000F00M40E1
			N2	1590	1710		CXA1512-0000-000F00N20E1
	80	---	M2	1380	1563	1A0, 1B0, 1C0, 1D0, 65F	CXA1512-0000-000F0HM20E1
			M4	1485	1685		CXA1512-0000-000F0HM40E1
			N2	1590	1710		CXA1512-0000-000F0HN20E1
5700 K	70	75	M2	1380	1563	2A0, 2B0, 2C0, 2D0, 57F	CXA1512-0000-000F00M20E2
			M4	1485	1685		CXA1512-0000-000F00M40E2
			N2	1590	1710		CXA1512-0000-000F00N20E2
	80	---	M2	1380	1563	2A0, 2B0, 2C0, 2D0, 57F	CXA1512-0000-000F0HM20E2
			M4	1485	1685		CXA1512-0000-000F0HM40E2
			N2	1590	1710		CXA1512-0000-000F0HN20E2
5000 K	70	75	M2	1380	1563	3A0, 3B0, 3C0, 3D0, 50F	CXA1512-0000-000F00M20E3
			M4	1485	1685		CXA1512-0000-000F00M40E3
			N2	1590	1710		CXA1512-0000-000F00N20E3
	80	---	M2	1380	1563	3A0, 3B0, 3C0, 3D0, 50F	CXA1512-0000-000F0HM20E3
			M4	1485	1685		CXA1512-0000-000F0HM40E3
			N2	1590	1710		CXA1512-0000-000F0HN20E3
4000 K	70	75	M2	1380	1563	5A0, 5B0, 5C0, 5D0, 40F	CXA1512-0000-000F00M40E5
			M4	1485	1685		CXA1512-0000-000F00M40E5
			N2	1590	1710		CXA1512-0000-000F00N20E5

Notes

- Cree maintains a tolerance of ±7% on flux and power measurements, ±0.005 on chromaticity (CCx, CCy) measurements and a tolerance of ±2 on CRI measurements. See the Measurements section (page 24).
- Cree XLamp CXA1512 LED order codes specify only a minimum flux bin and not a maximum. Cree may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity bin restrictions specified by the order code.

* Flux values @ 25 °C are calculated and for reference only.

Copyright © 2012-2017 Cree, Inc. All rights reserved. The information in this document is subject to change without notice. Cree®, XLamp® and EasyWhite® are registered trademarks and the Cree logo is a trademark of Cree, Inc. UL® and the UR logo are registered trademarks of UL LLC.

FLUX CHARACTERISTICS, EASYWHITE® ORDER CODES AND BINS - 36 V (I_F = 350 mA, T_J = 85 °C)

The following table provides order codes for XLamp CXA1512 LEDs. For a complete description of the order code nomenclature, please see the Bin and Order Code Formats section (page 21).

Nominal CCT	CRI		Minimum Luminous Flux			2-Step		3-Step		4-Step	
	Min	Typ	Group	Flux (lm) @ 85 °C	Flux (lm) @ 25 °C*	Group	Order Code	Group	Order Code	Group	Order Code
6500 K	70	75	M2	1380	1563						CXA1512-0000-000N00M265F
			M4	1485	1682					65F	CXA1512-0000-000N00M465F
			N2	1590	1710						CXA1512-0000-000N00N265F
	80	---	M2	1380	1563						CXA1512-0000-000N0HM265F
			M4	1485	1685					65F	CXA1512-0000-000N0HM465F
			N2	1590	1710						CXA1512-0000-000N0HN265F
5700 K	70	75	M2	1380	1563						CXA1512-0000-000N00M257F
			M4	1485	1682					57F	CXA1512-0000-000N00M457F
			N2	1590	1710						CXA1512-0000-000N00N257F
	80	---	M2	1380	1563						CXA1512-0000-000N0HM257F
			M4	1485	1682					57F	CXA1512-0000-000N0HM457F
			N2	1590	1710						CXA1512-0000-000N0HN257F
5000 K	70	75	M2	1380	1563	50H	CXA1512-0000-000N00M250H				CXA1512-0000-000N00M250F
			M4	1485	1682	50H	CXA1512-0000-000N00M450H			50F	CXA1512-0000-000N00M450F
			N2	1590	1710	50H	CXA1512-0000-000N00N250H				CXA1512-0000-000N00N250F
	80	---	M2	1380	1563	50H	CXA1512-0000-000N0HM250H				CXA1512-0000-000N0HM250F
			M4	1485	1682	50H	CXA1512-0000-000N0HM450H	50G	CXA1512-0000-000N0HM450G	50H	CXA1512-0000-000N0HM450F
			N2	1590	1710	50H	CXA1512-0000-000N0HN250H	50G	CXA1512-0000-000N0HN250G		CXA1512-0000-000N0HN250F
	90	95	J4	1120	1269	50H	CXA1512-0000-000N0UJ450H	50G	CXA1512-0000-000N0UJ450G		CXA1512-0000-000N0UJ450F
			K2	1200	1359	50H	CXA1512-0000-000N0UK250H	50G	CXA1512-0000-000N0UK250G	50F	CXA1512-0000-000N0UK250F
			K4	1290	1461	50H	CXA1512-0000-000N0UK450H	50G	CXA1512-0000-000N0UK450G		CXA1512-0000-000N0UK450F

Notes

- Cree maintains a tolerance of ±7% on flux and power measurements, ±0.005 on chromaticity (CCx, CCy) measurements and a tolerance of ±2 on CRI measurements. See the Measurements section (page 24).
- Cree XLamp CXA1512 LED order codes specify only a minimum flux bin and not a maximum. Cree may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity bin restrictions specified by the order code.

* Flux values @ 25 °C are calculated and for reference only.

Copyright © 2012-2017 Cree, Inc. All rights reserved. The information in this document is subject to change without notice. Cree®, XLamp® and EasyWhite® are registered trademarks and the Cree logo is a trademark of Cree, Inc. UL® and the UR logo are registered trademarks of UL LLC.

FLUX CHARACTERISTICS, EASYWHITE® ORDER CODES AND BINS - 36 V (I_F = 350 mA, T_J = 85 °C) - CONTINUED

Nominal CCT	CRI		Minimum Luminous Flux			2-Step		3-Step		4-Step	
	Min	Typ	Group	Flux (lm) @ 85 °C	Flux (lm) @ 25 °C*	Group	Order Code	Group	Order Code	Group	Order Code
4000 K	70	75	M2	1380	1563	40H	CXA1512-0000-000N00M240H			40F	CXA1512-0000-000N00M240F
			M4	1485	1682		CXA1512-0000-000N00M440H				CXA1512-0000-000N00M440F
			N2	1590	1710		CXA1512-0000-000N00N240H				CXA1512-0000-000N00N240F
	80	---	K4	1290	1461	40H	CXA1512-0000-000N0HK440H	40G		40F	CXA1512-0000-000N0HK440F
			M2	1380	1563		CXA1512-0000-000N0HM240H		CXA1512-0000-000N0HM240G		CXA1512-0000-000N0HM240F
			M4	1485	1682		CXA1512-0000-000N0HM440H		CXA1512-0000-000N0HM440G		CXA1512-0000-000N0HM440F
	90	95	J2	1040	1178	40H	CXA1512-0000-000N0UJ240H	40G	CXA1512-0000-000N0UJ240G	40F	CXA1512-0000-000N0UJ240F
			J4	1120	1269		CXA1512-0000-000N0UJ440H		CXA1512-0000-000N0UJ440G		CXA1512-0000-000N0UJ440F
			K2	1200	1359		CXA1512-0000-000N0UK240H		CXA1512-0000-000N0UK240G		CXA1512-0000-000N0UK240F
3500 K	80	---	K4	1290	1461	35H	CXA1512-0000-000N00K435H	35G		35F	CXA1512-0000-000N00K435F
			M2	1380	1563		CXA1512-0000-000N00M235H		CXA1512-0000-000N00M235G		CXA1512-0000-000N00M235F
			M4	1485	1682		CXA1512-0000-000N00M435H		CXA1512-0000-000N00M435G		CXA1512-0000-000N00M435F
	93	95	H4	970	1099	35H	CXA1512-0000-000N0YH435H	35G	CXA1512-0000-000N0YH435G	35F	CXA1512-0000-000N0YH435F
			J2	1040	1178		CXA1512-0000-000N0YJ235H		CXA1512-0000-000N0YJ235G		CXA1512-0000-000N0YJ235F
			J4	1120	1269		CXA1512-0000-000N0YJ435H		CXA1512-0000-000N0YJ435G		CXA1512-0000-000N0YJ435F
3000 K	80	---	K4	1290	1461	30H	CXA1512-0000-000N00K430H	30G		30F	CXA1512-0000-000N00K430F
			M2	1380	1563		CXA1512-0000-000N00M230H		CXA1512-0000-000N00M230G		CXA1512-0000-000N00M230F
			M4	1485	1682		CXA1512-0000-000N00M430H		CXA1512-0000-000N00M430G		CXA1512-0000-000N00M430F
	93	95	H4	970	1099	30H	CXA1512-0000-000N0YH430H	30G		30F	CXA1512-0000-000N0YH430F
			J2	1040	1178		CXA1512-0000-000N0YJ230H		CXA1512-0000-000N0YJ230G		CXA1512-0000-000N0YJ230F
			J4	1120	1269		CXA1512-0000-000N0YJ430H		CXA1512-0000-000N0YJ430G		CXA1512-0000-000N0YJ430F

Notes

- Cree maintains a tolerance of ±7% on flux and power measurements, ±0.005 on chromaticity (CCx, CCy) measurements and a tolerance of ±2 on CRI measurements. See the Measurements section (page 24).
- Cree XLamp CXA1512 LED order codes specify only a minimum flux bin and not a maximum. Cree may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity bin restrictions specified by the order code.

* Flux values @ 25 °C are calculated and for reference only.

Copyright © 2012-2017 Cree, Inc. All rights reserved. The information in this document is subject to change without notice. Cree®, XLamp® and EasyWhite® are registered trademarks and the Cree logo is a trademark of Cree, Inc. UL® and the UR logo are registered trademarks of UL LLC.

FLUX CHARACTERISTICS, EASYWHITE® ORDER CODES AND BINS - 36 V (I_F = 350 mA, T_J = 85 °C) - CONTINUED

Nominal CCT	CRI		Minimum Luminous Flux			2-Step		3-Step		4-Step	
	Min	Typ	Group	Flux (lm) @ 85 °C	Flux (lm) @ 25 °C*	Group	Order Code	Group	Order Code	Group	Order Code
2700 K	80	---	K2	1200	1359	27H	CXA1512-0000-000N00K227H	27G		27F	CXA1512-0000-000N00K227F
			K4	1290	1461		CXA1512-0000-000N00K427H		CXA1512-0000-000N00K427G		CXA1512-0000-000N00K427F
			M2	1380	1563		CXA1512-0000-000N00M227H		CXA1512-0000-000N00M227G		CXA1512-0000-000N00M227F
	93	95	H2	900	1019	27H	CXA1512-0000-000N0YH227H	27G		27F	CXA1512-0000-000N0YH227F
			H4	970	1099		CXA1512-0000-000N0YH427H		CXA1512-0000-000N0YH427G		CXA1512-0000-000N0YH427F
			J2	1040	1178		CXA1512-0000-000N0YJ227H		CXA1512-0000-000N0YJ227G		CXA1512-0000-000N0YJ227F

Notes

- Cree maintains a tolerance of ±7% on flux and power measurements, ±0.005 on chromaticity (CCx, CCy) measurements and a tolerance of ±2 on CRI measurements. See the Measurements section (page 24).
- Cree XLamp CXA1512 LED order codes specify only a minimum flux bin and not a maximum. Cree may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity bin restrictions specified by the order code.

* Flux values @ 25 °C are calculated and for reference only.

Copyright © 2012-2017 Cree, Inc. All rights reserved. The information in this document is subject to change without notice. Cree®, XLamp® and EasyWhite® are registered trademarks and the Cree logo is a trademark of Cree, Inc. UL® and the UR logo are registered trademarks of UL LLC.

FLUX CHARACTERISTICS, ANSI WHITE ORDER CODES AND BINS - 36 V (I_F = 350 mA, T_J = 85 °C)

The following table provides order codes for XLamp CXA1512 LEDs. For a complete description of the order code nomenclature, please see the Bin and Order Code Formats section (page 21).

Nominal CCT	CRI		Minimum Luminous Flux			Chromaticity Regions	Order Code
	Min	Typ	Group	Flux (lm) @ 85 °C	Flux (lm) @ 25 °C*		
6500 K	70	75	M2	1380	1563	1A0, 1B0, 1C0, 1D0, 65F	CXA1512-0000-000N00M20E1
			M4	1485	1685		CXA1512-0000-000N00M40E1
			N2	1590	1710		CXA1512-0000-000N00N20E1
	80	---	M2	1380	1563	1A0, 1B0, 1C0, 1D0, 65F	CXA1512-0000-000N0HM20E1
			M4	1485	1685		CXA1512-0000-000N0HM40E1
			N2	1590	1710		CXA1512-0000-000N0HN20E1
5700 K	70	75	M2	1380	1563	2A0, 2B0, 2C0, 2D0, 57F	CXA1512-0000-000N00M20E2
			M4	1485	1685		CXA1512-0000-000N00M40E2
			N2	1590	1710		CXA1512-0000-000N00N20E2
	80	---	M2	1380	1563	2A0, 2B0, 2C0, 2D0, 57F	CXA1512-0000-000N0HM20E2
			M4	1485	1685		CXA1512-0000-000N0HM40E2
			N2	1590	1710		CXA1512-0000-000N0HN20E2
5000 K	70	75	M2	1380	1563	3A0, 3B0, 3C0, 3D0, 50F	CXA1512-0000-000N00M20E3
			M4	1485	1685		CXA1512-0000-000N00M40E3
			N2	1590	1710		CXA1512-0000-000N00N20E3
	80	---	M2	1380	1563	3A0, 3B0, 3C0, 3D0, 50F	CXA1512-0000-000N0HM20E3
			M4	1485	1685		CXA1512-0000-000N0HM40E3
			N2	1590	1710		CXA1512-0000-000N0HN20E3
4000 K	70	75	M2	1380	1563	5A0, 5B0, 5C0, 5D0, 40F	CXA1512-0000-000N00M40E5
			M4	1485	1685		CXA1512-0000-000N00M40E5
			N2	1590	1710		CXA1512-0000-000N00N20E5

Notes


- Cree maintains a tolerance of ±7% on flux and power measurements, ±0.005 on chromaticity (CCx, CCy) measurements and a tolerance of ±2 on CRI measurements. See the Measurements section (page 24).
- Cree XLamp CXA1512 LED order codes specify only a minimum flux bin and not a maximum. Cree may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity bin restrictions specified by the order code.

* Flux values @ 25 °C are calculated and for reference only.

Copyright © 2012-2017 Cree, Inc. All rights reserved. The information in this document is subject to change without notice. Cree®, XLamp® and EasyWhite® are registered trademarks and the Cree logo is a trademark of Cree, Inc. UL® and the UR logo are registered trademarks of UL LLC.

RELATIVE SPECTRAL POWER DISTRIBUTION


The following graph is the result of a series of pulsed measurements at 700 mA for the 18-V CXA1512 LED and 350 mA for the 36-V CXA1512 LED and T_J = 85 °C.

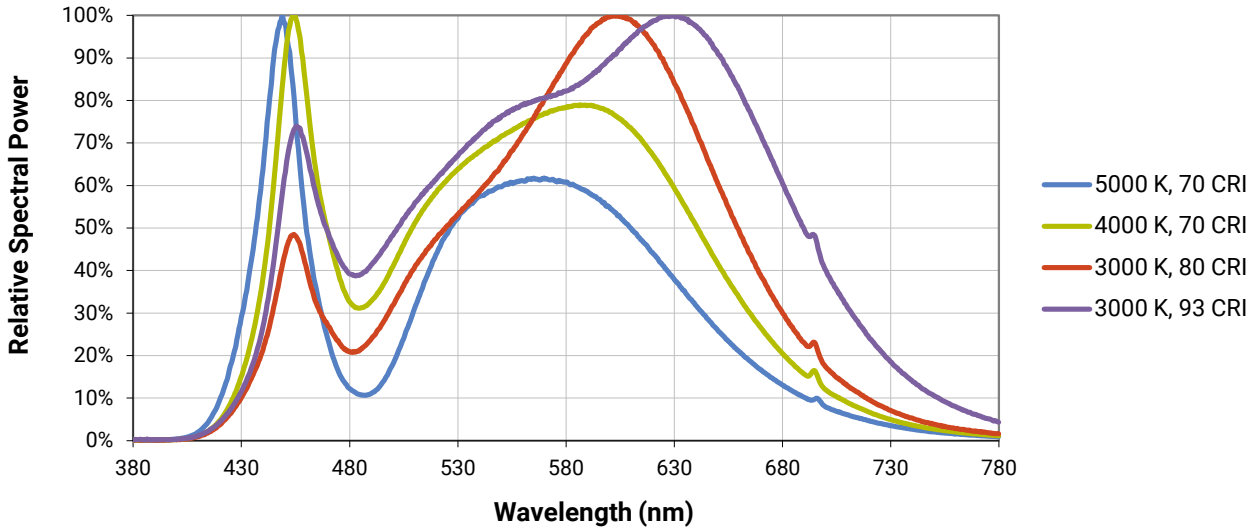


Copyright © 2012-2017 Cree, Inc. All rights reserved. The information in this document is subject to change without notice. Cree®, XLamp® and EasyWhite® are registered trademarks and the Cree logo is a trademark of Cree, Inc. UL® and the UR logo are registered trademarks of UL LLC.

ELECTRICAL CHARACTERISTICS

The following graphs are the result of a series of steady-state measurements.

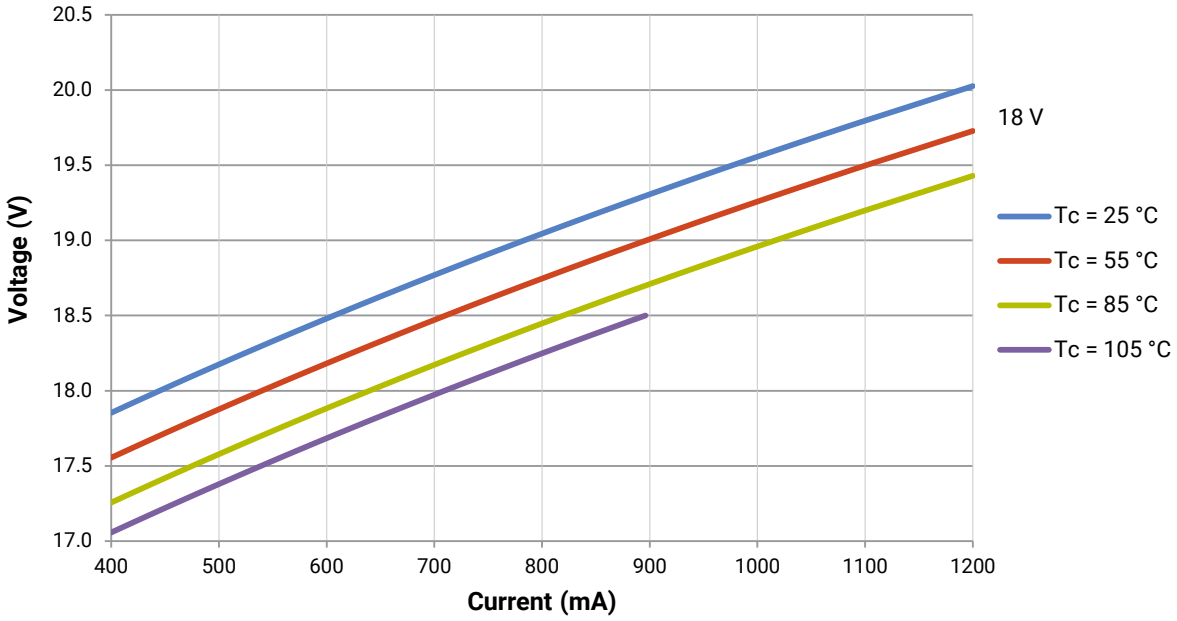

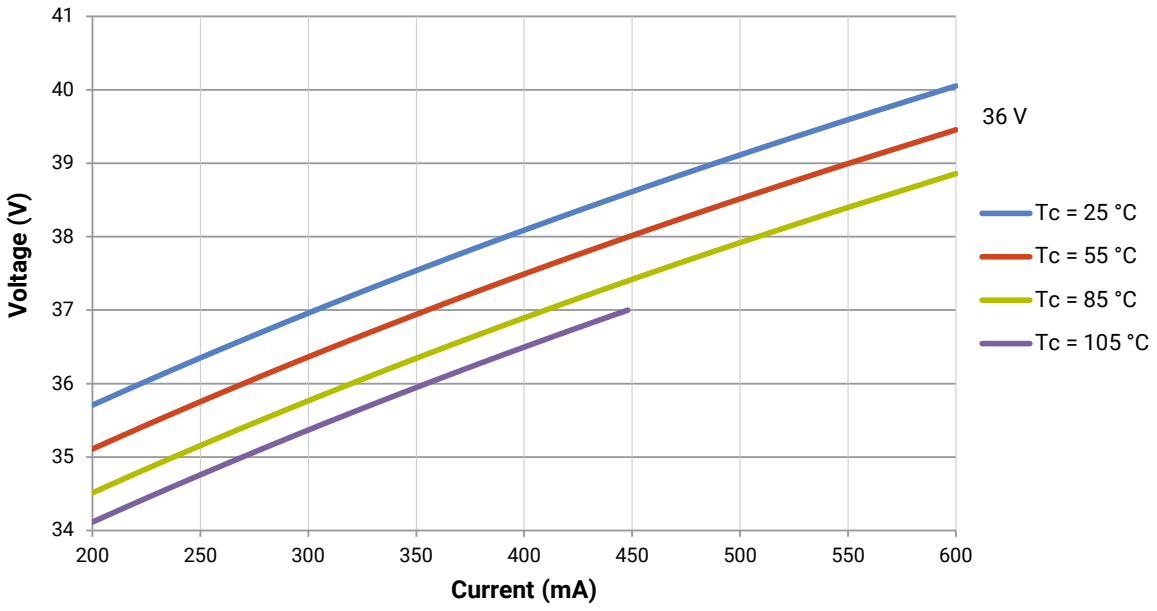


Copyright © 2012-2017 Cree, Inc. All rights reserved. The information in this document is subject to change without notice. Cree®, XLamp® and EasyWhite® are registered trademarks and the Cree logo is a trademark of Cree, Inc. UL® and the UR logo are registered trademarks of UL LLC.

RELATIVE LUMINOUS FLUX

The relative luminous flux values provided below are the ratio of:

- Measurements of CXA1512 at steady-state operation at the given conditions, divided by
- Flux measured during binning, which is a pulsed measurement at 700 mA at T_J = 85 °C for the 18-V CXA1512 LED.

Using the 18-V CXA1512 LED as an example, at steady-state operation of Tc = 105 °C, I_F = 600 mA, the relative luminous flux ratio is 80% in the chart below. A CXA1512 LED that measures 1200 lm during binning will deliver 960 lm (1200 * 0.8) at steady-state operation of Tc = 105 °C, I_F = 600 mA.

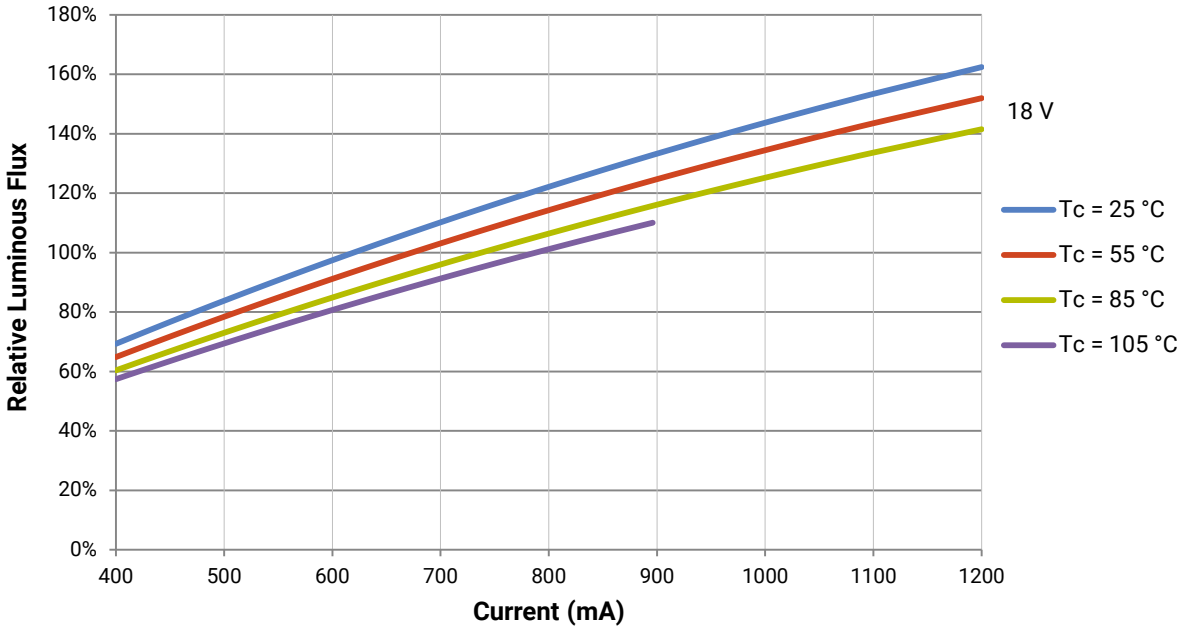


Copyright © 2012-2017 Cree, Inc. All rights reserved. The information in this document is subject to change without notice. Cree®, XLamp® and EasyWhite® are registered trademarks and the Cree logo is a trademark of Cree, Inc. UL® and the UR logo are registered trademarks of UL LLC.

RELATIVE LUMINOUS FLUX - CONTINUED

The relative luminous flux values provided below are the ratio of:


- Measurements of CXA1512 at steady-state operation at the given conditions, divided by
- Flux measured during binning, which is a pulsed measurement at 350 mA at T_J = 85 °C for the 36-V CXA1512 LED.

Using the 36-V CXA1512 LED as an example, at steady-state operation of Tc = 105 °C, I_F = 300 mA, the relative luminous flux ratio is 80% in the chart below. A CXA1512 LED that measures 1200 lm during binning will deliver 960 lm (1200 * 0.8) at steady-state operation of Tc = 105 °C, I_F = 300 mA.

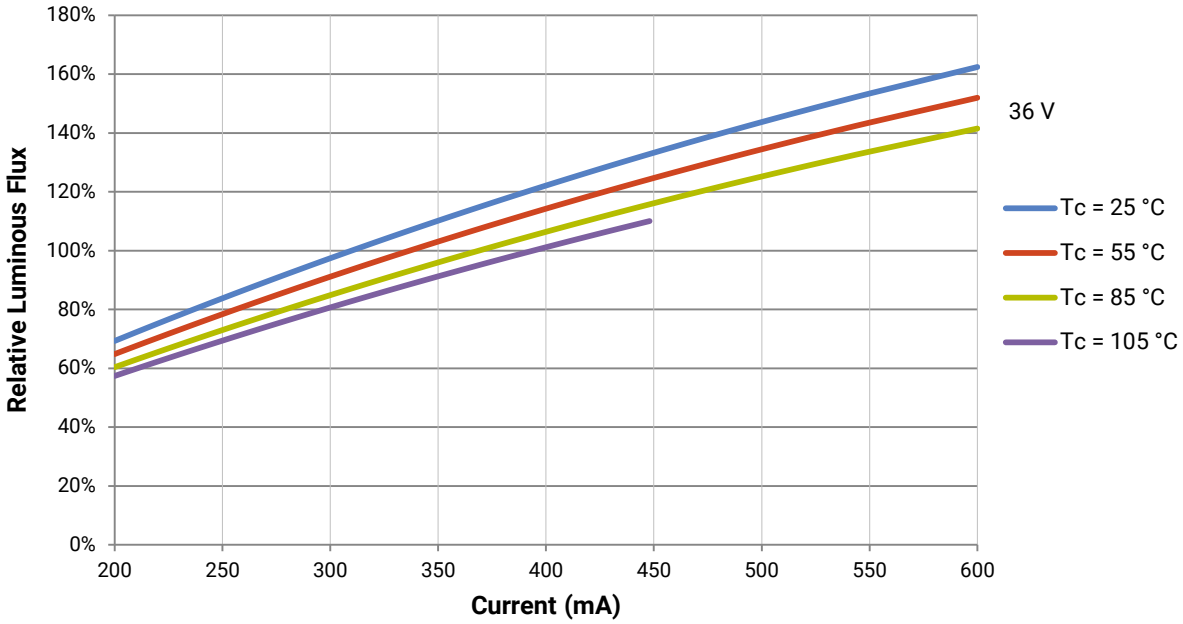

Copyright © 2012-2017 Cree, Inc. All rights reserved. The information in this document is subject to change without notice. Cree®, XLamp® and EasyWhite® are registered trademarks and the Cree logo is a trademark of Cree, Inc. UL® and the UR logo are registered trademarks of UL LLC.

TYPICAL SPATIAL DISTRIBUTION

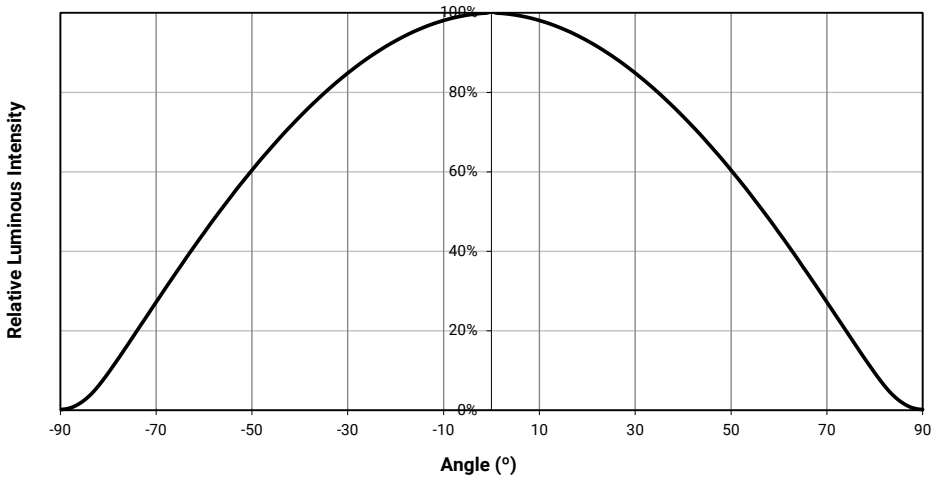

PERFORMANCE GROUPS - BRIGHTNESS (18 V, I_F = 700 mA; 36 V, I_F = 350 mA, T_J = 85 °C)

XLamp CXA1512 LEDs are tested for luminous flux and placed into one of the following bins.

Group Code	Minimum Luminous Flux	Maximum Luminous Flux
H2	900	970
H4	970	1040
J2	1040	1120
J4	1120	1200
K2	1200	1290
K4	1290	1380
M2	1380	1485
M4	1485	1590
N2	1590	1710
N4	1710	1830

Copyright © 2012-2017 Cree, Inc. All rights reserved. The information in this document is subject to change without notice. Cree®, XLamp® and EasyWhite® are registered trademarks and the Cree logo is a trademark of Cree, Inc. UL® and the UR logo are registered trademarks of UL LLC.

PERFORMANCE GROUPS - CHROMATICITY (T_J = 85 °C)

XLamp CXA1512 LEDs are tested for chromaticity and placed into one of the regions defined by the following bounding coordinates.

EasyWhite Color Temperatures – 2-Step			
Code	**CCT**	**x**	**y**
50H	5000 K	0.3429	0.3507
		0.3434	0.3571
		0.3475	0.3604
		0.3469	0.3539
40H	4000 K	0.3784	0.3741
		0.3804	0.3818
		0.3867	0.3857
		0.3844	0.3778
35H	3500 K	0.4030	0.3857
		0.4061	0.3941
		0.4132	0.3976
		0.4099	0.3890
30H	3000 K	0.4291	0.3973
		0.4333	0.4062
		0.4395	0.4084
		0.4351	0.3994
27H	2700 K	0.4528	0.4046
		0.4578	0.4138
		0.4638	0.4152
		0.4586	0.4060

EasyWhite Color Temperatures – 3-Step Ellipse						
Bin Code	**CCT**	**Center Point**		**Major Axis**	**Minor Axis**	**Rotation Angle (°)**
		x	**y**	**a**	**b**	
50G	5000 K	0.3447	0.3553	0.00840	0.00312	65.0
40G	4000 K	0.3818	0.3797	0.00939	0.00402	53.7
35G	3500 K	0.4073	0.3917	0.00927	0.00414	54.0
30G	3000 K	0.4338	0.4030	0.00834	0.00408	53.2
27G	2700 K	0.4577	0.4099	0.00834	0.00420	48.5

Copyright © 2012-2017 Cree, Inc. All rights reserved. The information in this document is subject to change without notice. Cree®, XLamp® and EasyWhite® are registered trademarks and the Cree logo is a trademark of Cree, Inc. UL® and the UR logo are registered trademarks of UL LLC.

PERFORMANCE GROUPS - CHROMATICITY (T_J = 85 °C) - CONTINUED

EasyWhite Color Temperatures – 4-Step			
Code	**CCT**	**x**	**y**
65F	6500 K	0.3097	0.3196
		0.3079	0.3297
		0.3164	0.3382
		0.3176	0.3275
57F	5700 K	0.3253	0.3325
		0.3249	0.3439
		0.3331	0.3514
		0.3330	0.3393
50F	5000 K	0.3407	0.3459
		0.3415	0.3586
		0.3499	0.3654
		0.3484	0.3521
40F	4000 K	0.3744	0.3685
		0.3782	0.3837
		0.3912	0.3917
		0.3863	0.3758
35F	3500 K	0.3981	0.3800
		0.4040	0.3966
		0.4186	0.4037
		0.4116	0.3865
30F	3000 K	0.4242	0.3919
		0.4322	0.4096
		0.4449	0.4141
		0.4359	0.3960
27F	2700 K	0.4475	0.3994
		0.4573	0.4178
		0.4695	0.4207
		0.4589	0.4021

Copyright © 2012-2017 Cree, Inc. All rights reserved. The information in this document is subject to change without notice. Cree®, XLamp® and EasyWhite® are registered trademarks and the Cree logo is a trademark of Cree, Inc. UL® and the UR logo are registered trademarks of UL LLC.

PERFORMANCE GROUPS - CHROMATICITY (T_J = 85 °C) - CONTINUED

ANSI White Bins				
Code	CCT	Bin Code	x	y
0E1	6500 K	1A0	0.3048	0.3207
			0.3130	0.3290
			0.3144	0.3186
			0.3068	0.3113
		1B0	0.3028	0.3304
			0.3115	0.3391
			0.3130	0.3290
			0.3048	0.3207
		1C0	0.3115	0.3391
			0.3205	0.3481
			0.3213	0.3373
			0.3130	0.3290
		1D0	0.3130	0.3290
			0.3213	0.3373
			0.3221	0.3261
			0.3144	0.3186


ANSI White Bins				
Code	CCT	Bin Code	x	y
0E2	5700 K	2A0	0.3215	0.3350
			0.3290	0.3417
			0.3290	0.3300
			0.3222	0.3243
		2B0	0.3207	0.3462
			0.3290	0.3538
			0.3290	0.3417
			0.3215	0.3350
		2C0	0.3290	0.3538
			0.3376	0.3616
			0.3371	0.3490
			0.3290	0.3417
		2D0	0.3290	0.3417
			0.3371	0.3490
			0.3366	0.3369
			0.3290	0.3300

ANSI White Bins				
Code	CCT	Bin Code	x	y
0E3	5000 K	3A0	.3371	.3490
			.3451	.3554
			.3440	.3427
			.3366	.3369
		3B0	.3376	.3616
			.3463	.3687
			.3451	.3554
			.3371	.3490
		3C0	.3463	.3687
			.3551	.3760
			.3533	.3620
			.3451	.3554
		3D0	.3451	.3554
			.3533	.3620
			.3515	.3487
			.3440	.3427


ANSI White Bins				
Code	CCT	Bin Code	x	y
0E5	4000 K	5A0	.3670	.3578
			.3702	.3722
			.3825	.3798
			.3783	.3646
		5B0	.3702	.3722
			.3736	.3874
			.3869	.3958
			.3825	.3798
		5C0	.3825	.3798
			.3869	.3958
			.4006	.4044
			.3950	.3875
		5D0	.3783	.3646
			.3825	.3798
			.3950	.3875
			.3898	.3716

Copyright © 2012-2017 Cree, Inc. All rights reserved. The information in this document is subject to change without notice. Cree®, XLamp® and EasyWhite® are registered trademarks and the Cree logo is a trademark of Cree, Inc. UL® and the UR logo are registered trademarks of UL LLC.

CREE EASYWHITE® BINS PLOTTED ON THE 1931 CIE COLOR SPACE (T_J = 85 °C)

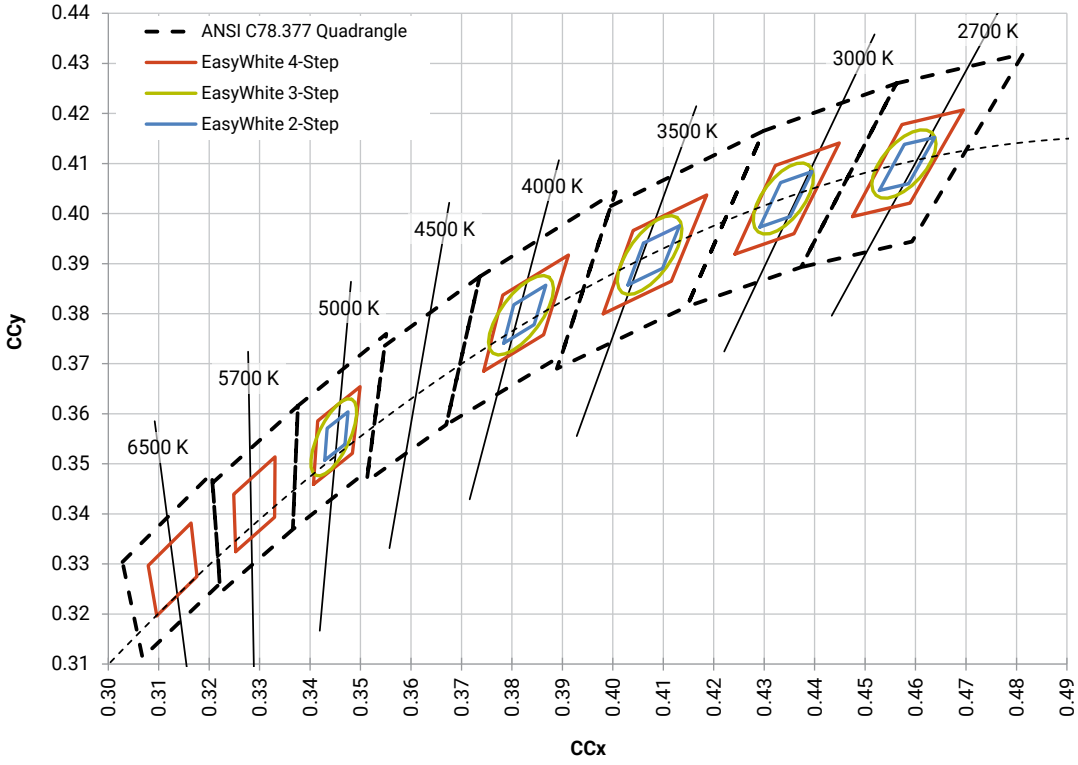

CREE ANSI WHITE BINS PLOTTED ON THE 1931 CIE COLOR SPACE (T_J = 85 °C)

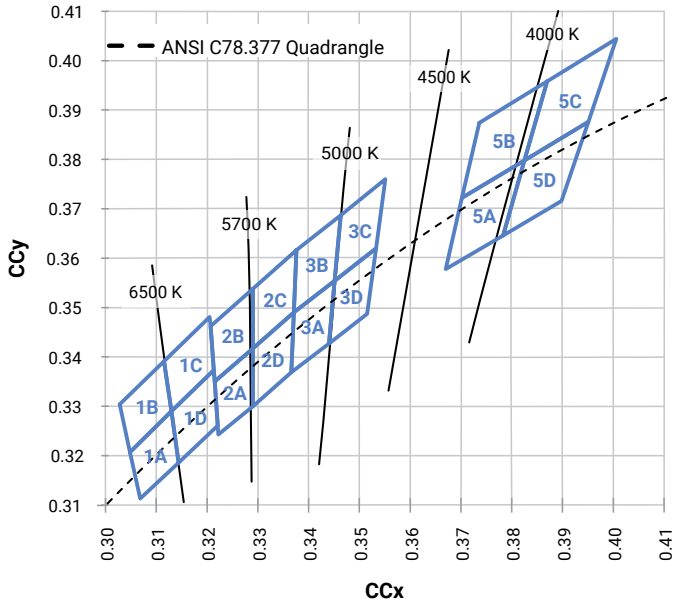


Copyright © 2012-2017 Cree, Inc. All rights reserved. The information in this document is subject to change without notice. Cree®, XLamp® and EasyWhite® are registered trademarks and the Cree logo is a trademark of Cree, Inc. UL® and the UR logo are registered trademarks of UL LLC.


BIN AND ORDER CODE FORMATS

Bin codes and order codes are configured as follows:

Order Code

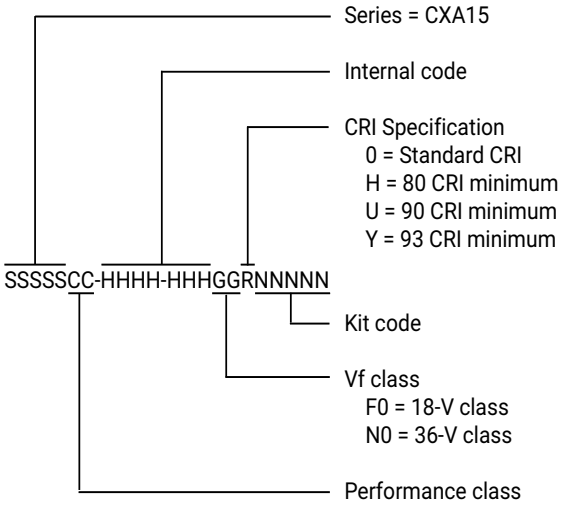

Bin Code

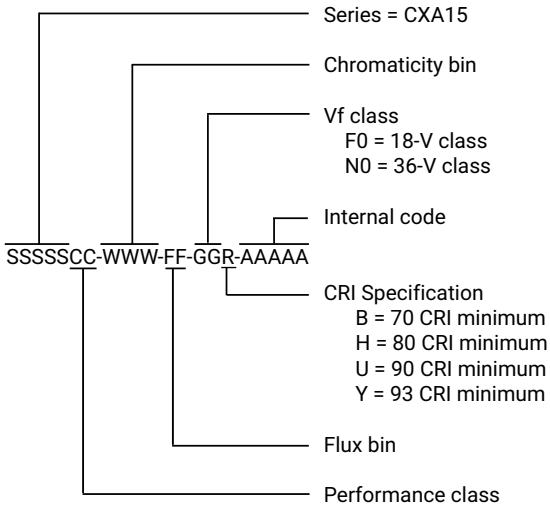

MECHANICAL DIMENSIONS

Dimensions are in mm.


Tolerances unless otherwise specified: ±.13

x° ± 1°

Meaning of 1512X

1512F = 18-V CXA1512

1512N = 36-V CXA1512

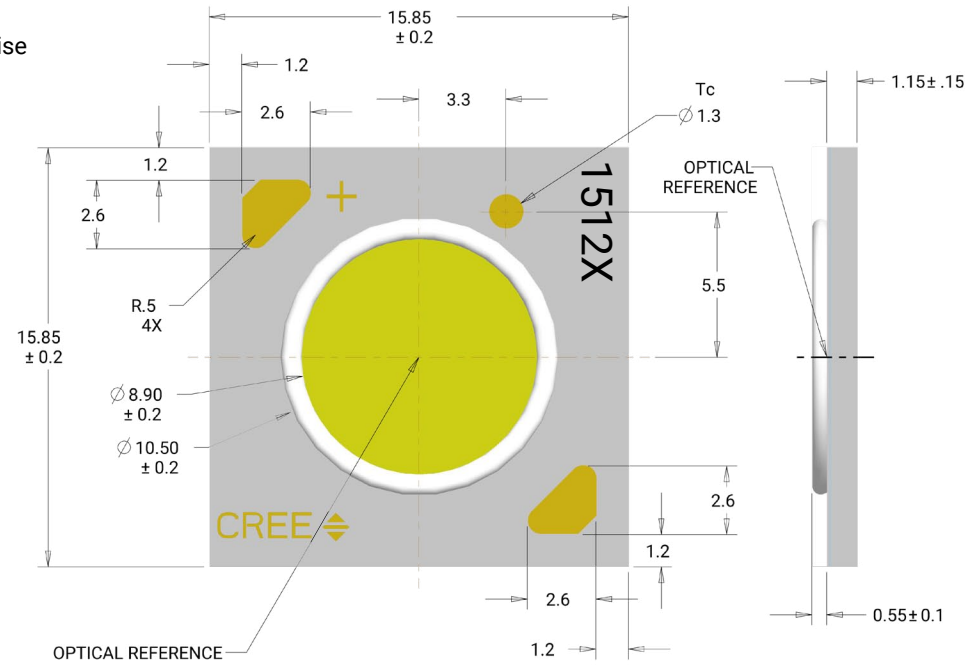

Copyright © 2012-2017 Cree, Inc. All rights reserved. The information in this document is subject to change without notice. Cree®, XLamp® and EasyWhite® are registered trademarks and the Cree logo is a trademark of Cree, Inc. UL® and the UR logo are registered trademarks of UL LLC.


THERMAL DESIGN


The CXA family of LED arrays can include over a hundred different LED die inside one package, and thus over a hundred different junction temperatures (T_J). Cree has intentionally removed junction-temperature-based operating limits and replaced the commonplace maximum T_J calculations with maximum ratings based on forward current (I_F) and case temperature (Tc). No additional calculations are required to ensure the CXA LED is being operated within its designed limits. Please refer to page 3 for the Operating Limit specification.

There is no need to calculate for T_J inside the package, as the thermal management design process, specifically from solder point (T_{SP}) to ambient (T_a), remains identical to any other LED component. For more information on thermal management of Cree XLamp LEDs, please refer to the Thermal Management application note. For CXA soldering recommendations and more information on thermal interface materials (TIM) and connection methods, please refer to the Cree XLamp CX Family LEDs soldering and handling document. The CX Family LED Design Guide provides basic information on the requirements to use Cree XLamp CXA LEDs successfully in luminaire designs.

To keep the CXA1512 LED at or below the maximum rated Tc, the case to ambient temperature thermal resistance (R_c-a) must be at or below the maximum R_c-a value shown on the following graphs, depending on the operating environment. The y-axis in the graphs is a base 10 logarithmic scale.


As the figure at right shows, the R_c-a value is the sum of the thermal resistance of the TIM (R_tim) plus the thermal resistance of the heat sink (R_hs).

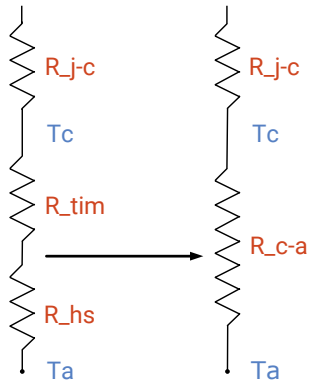

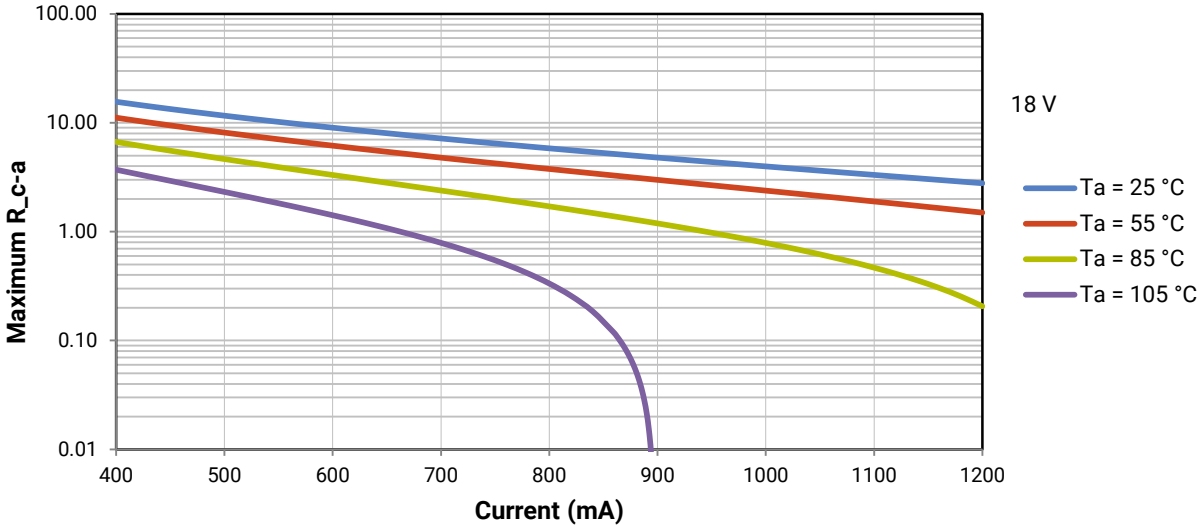

Copyright © 2012-2017 Cree, Inc. All rights reserved. The information in this document is subject to change without notice. Cree®, XLamp® and EasyWhite® are registered trademarks and the Cree logo is a trademark of Cree, Inc. UL® and the UR logo are registered trademarks of UL LLC.

THERMAL DESIGN - CONTINUED

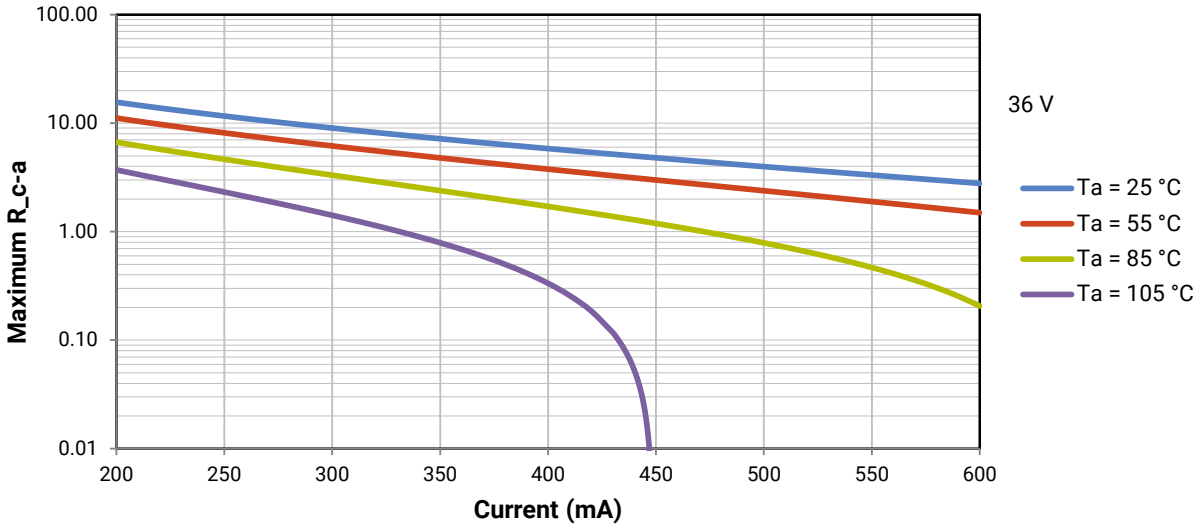

Copyright © 2012-2017 Cree, Inc. All rights reserved. The information in this document is subject to change without notice. Cree®, XLamp® and EasyWhite® are registered trademarks and the Cree logo is a trademark of Cree, Inc. UL® and the UR logo are registered trademarks of UL LLC.

NOTES

Measurements

The luminous flux, radiant power, chromaticity, forward voltage and CRI measurements in this document are binning specifications only and solely represent product measurements as of the date of shipment. These measurements will change over time based on a number of factors that are not within Cree's control and are not intended or provided as operational specifications for the products. Calculated values are provided for informational purposes only and are not intended as specifications.

Pre-Release Qualification Testing

Please read the LED Reliability Overview for details of the qualification process Cree applies to ensure long-term reliability for XLamp LEDs and details of Cree's pre-release qualification testing for XLamp LEDs.

Lumen Maintenance

Cree now uses standardized IES LM-80-08 and TM-21-11 methods for collecting long-term data and extrapolating LED lumen maintenance. For information on the specific LM-80 data sets available for this LED, refer to the public LM-80 results document.

Please read the Long-Term Lumen Maintenance application note for more details on Cree's lumen maintenance testing and forecasting. Please read the Thermal Management application note for details on how thermal design, ambient temperature, and drive current affect the LED junction temperature.

RoHS Compliance

The levels of RoHS restricted materials in this product are below the maximum concentration values (also referred to as the threshold limits) permitted for such substances, or are used in an exempted application, in accordance with EU Directive 2011/65/EC (RoHS2), as implemented January 2, 2013. RoHS Declarations for this product can be obtained from your Cree representative or from the Product Documentation sections of www.cree.com.

REACh Compliance

REACh substances of very high concern (SVHCs) information is available for this product. Since the European Chemical Agency (ECHA) has published notice of their intent to frequently revise the SVHC listing for the foreseeable future, please contact a Cree representative to insure you get the most up-to-date REACh SVHC Declaration. REACh banned substance information (REACh Article 67) is also available upon request.

UL® Recognized Component

Level 4 enclosure consideration. The LED package or a portion thereof has been investigated as a fire and electrical enclosure per ANSI/UL 8750.

Vision Advisory


WARNING: Do not look at an exposed lamp in operation. Eye injury can result. For more information about LEDs and eye safety, please refer to the LED Eye Safety application note.


Copyright © 2012-2017 Cree, Inc. All rights reserved. The information in this document is subject to change without notice. Cree®, XLamp® and EasyWhite® are registered trademarks and the Cree logo is a trademark of Cree, Inc. UL® and the UR logo are registered trademarks of UL LLC.


PACKAGING


Cree CXA1512 LEDs are packaged in trays of 20. Five trays are sealed in an anti-static bag and placed inside a carton, for a total of 100 LEDs per carton. Each carton contains 100 LEDs from the same performance bin.

Dimensions are in inches.
Tolerances: ±.13
x° ±1°

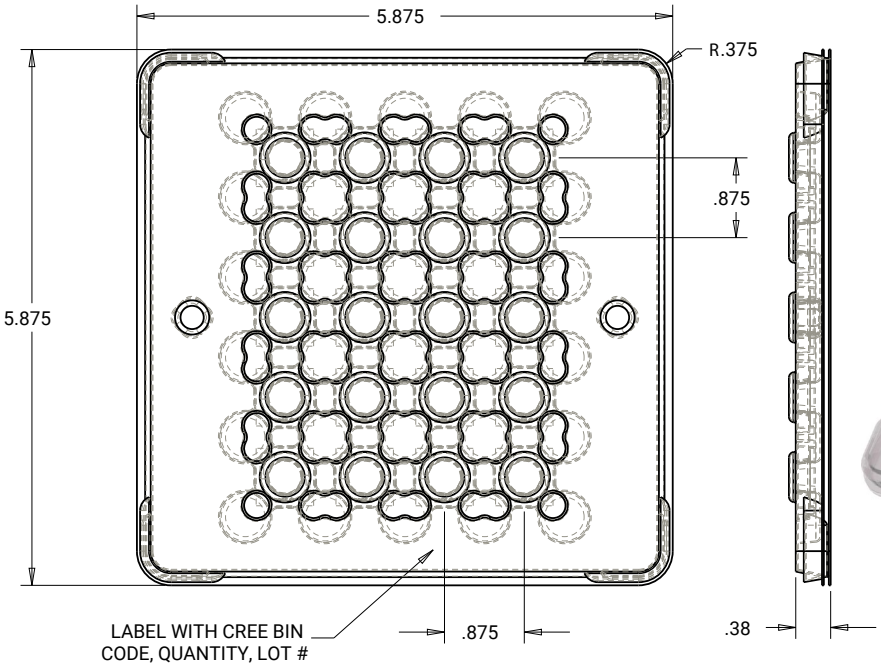

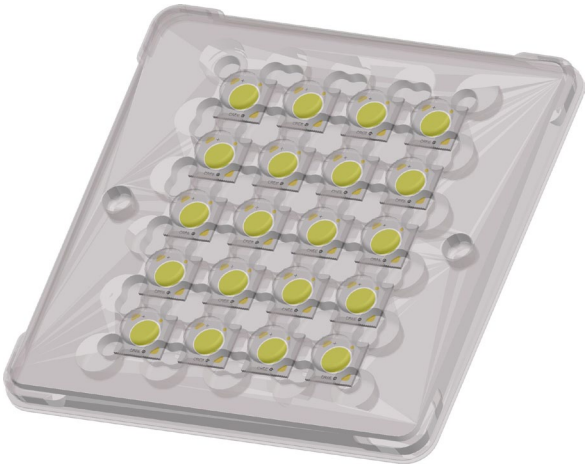

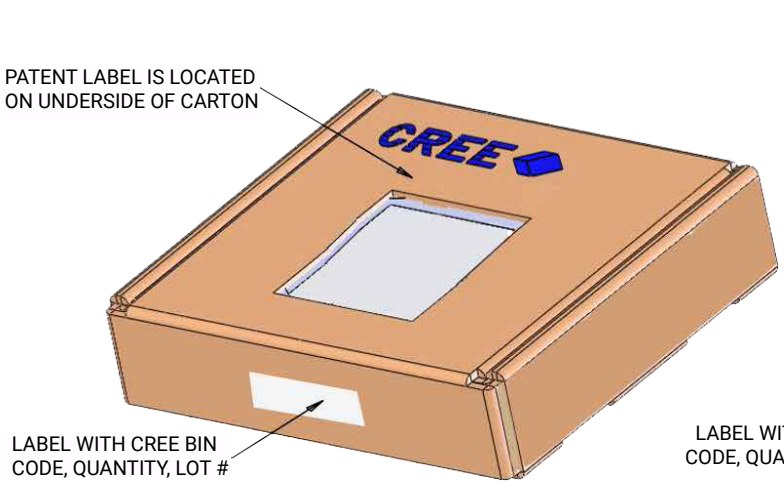

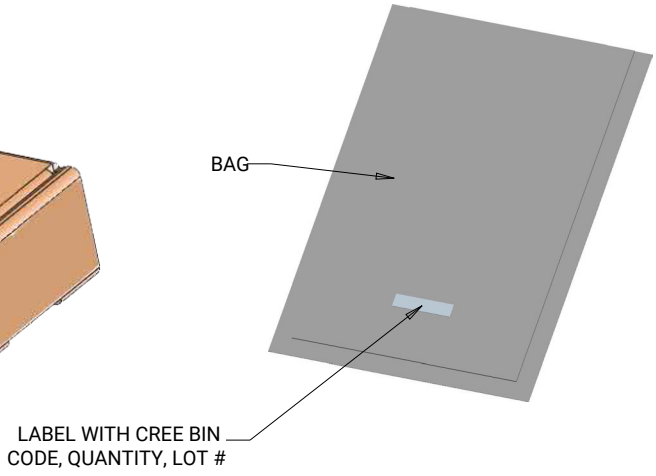

Copyright © 2012-2017 Cree, Inc. All rights reserved. The information in this document is subject to change without notice. Cree®, XLamp® and EasyWhite® are registered trademarks and the Cree logo is a trademark of Cree, Inc. UL® and the UR logo are registered trademarks of UL LLC.

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

CREE:

C5SMF-GJE-CX14Q7T2 CXA1507-0000-000N00G227G CXA1512-0000-000N00M450F
XTEARY-00-0000-000000N05 CLM1B-GKW-CXAYA7A3 CP41B-ADS-CM0P0354
CXA2520-0000-000N00R20E3 CXA2520-0000-000N00R230G XTEAWT-E0-0000-00000BKE1
CLMUD-FKC-CHJNPM569ABB845343 MHBBWT-0000-000C0HC430H XPEBFR-L1-0000-00701
XQEGRN-00-0000-000000C01 CXA1304-0000-000N00C20E3 CXA2520-0000-000N00Q40E2
XHBAWT-00-0000-00000HXE3 XPEBRD-L1-0000-00701 CXA1816-0000-000N00N435F
XHP50B-00-0000-0D00J20E1 C503B-GAN-CD0E0781 CLA1B-WKW-XD0F0E13
CXA1304-0000-000C0HB250F CXA1304-0000-000C0Y840E8 MLBAWT-U1-0000-000VE5
XQEGRN-H0-0000-000000901 C513A-WSS-CX0Z0231 CXA1304-0000-000C0HC440H
XPEBRO-L1-0000-00801 C566C-RFF-CV0W0BB2 XPEBLU-L1-0000-00201