
Dec.1.2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

HRS DRAWING FOR REFERENCE

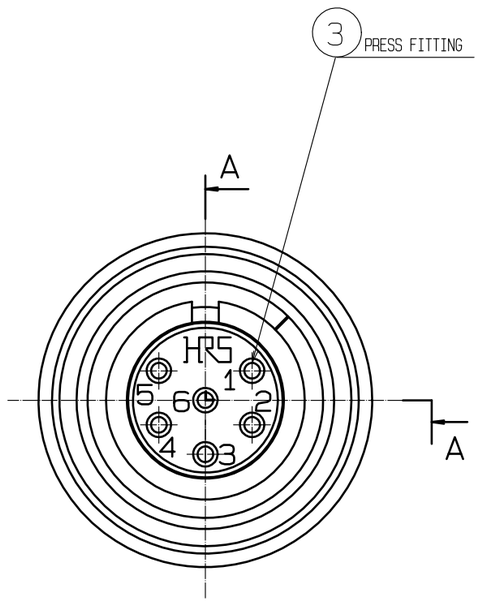

A–A


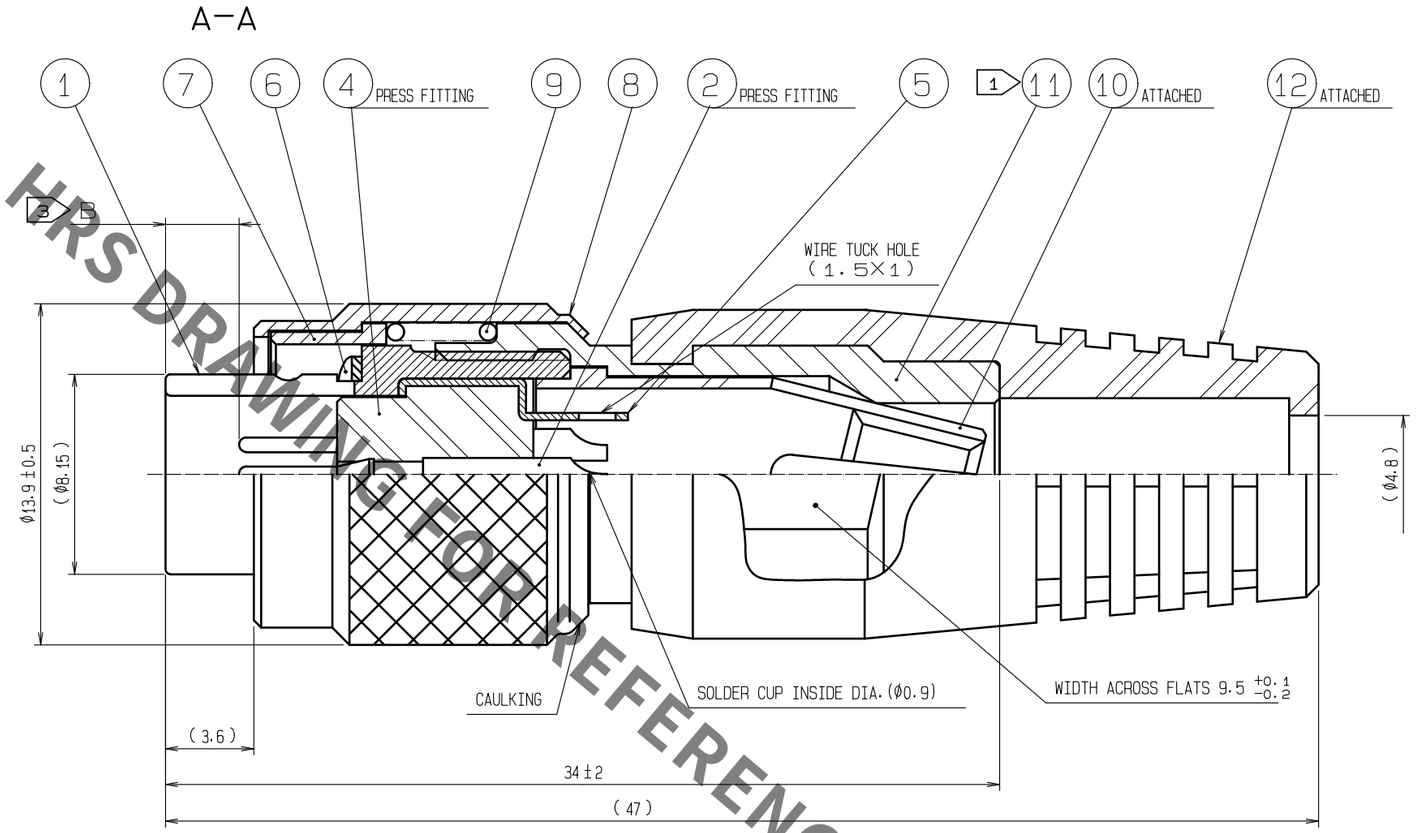


Fig. 1

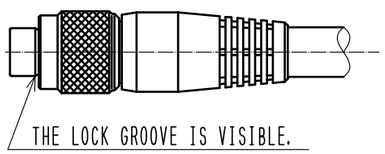

NOTES
1. THE RECOMMENDED CLAMP TORQUE OF REF. NO.(11) : 1 N・m.
   LOCTITE 271, HENKEL JAPAN IS RECOMMENDED TO REF. NO.(11) FROM LOOSENING.
2. ROTATION EXAMPLES OF REF. NO. (1) AND (11) ARE SHOWN.
3. B DIMENSION IS FOLLOWING. CONTACT NO. 1 : (1.5)
   CONTACT NO. 2 TO 6 : (3)
4. SURFACE PLATING : GOLD PLATING 0.2μm min.
   UNDER PLATING : NICKEL PLATING 3μm min.

△1 5 Fig. 1 REPRESENTS THE PRODUCT APPEARANCE AFTER IMPROPER ASSEMBLY.
IF THE LOCK GROOVE IS VISIBLE, NO.(1) AND NO.(11) MAY NOT BE ASSEMBLED CORRECTLY.

NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
6	BERYLLIUM COPPER	NICKEL PLATING	12	SIR	(BLACK)
5	PHOSPHOR BRONZE	TIN PLATING	11	BRASS	NICKEL PLATING
4	PBT	(BLACK) UL94V-0	10	POLYACETAL	
3	BRASS	4	9	STEEL	NICKLE PLATING
2	BRASS	4	8	BRASS	MATTE FINISH NICKEL PLATING
1	ALUMINUM ALLOY	NICKEL PLATING	7	STAINLESS STEEL	

UNITS	SCALE		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	4 : 1	△1	1	DIS-C-00005509	KN. IKEHARA	HS. KAWASHIMA	20210325

HIROSE ELECTRIC CO., LTD.

APPROVED	MR. YOSHIDA	20050105	DRAWING NO. EDC3-110281-71
CHECKED	MO. SATOH	20050105	PART NO. MXR-8PA-6PB(71)
DESIGNED	YH. YAMADA	20050105	
DRAWN	YH. YAMADA	20050105	CODE NO. CL0127-0005-1-71 △1