



RoHS

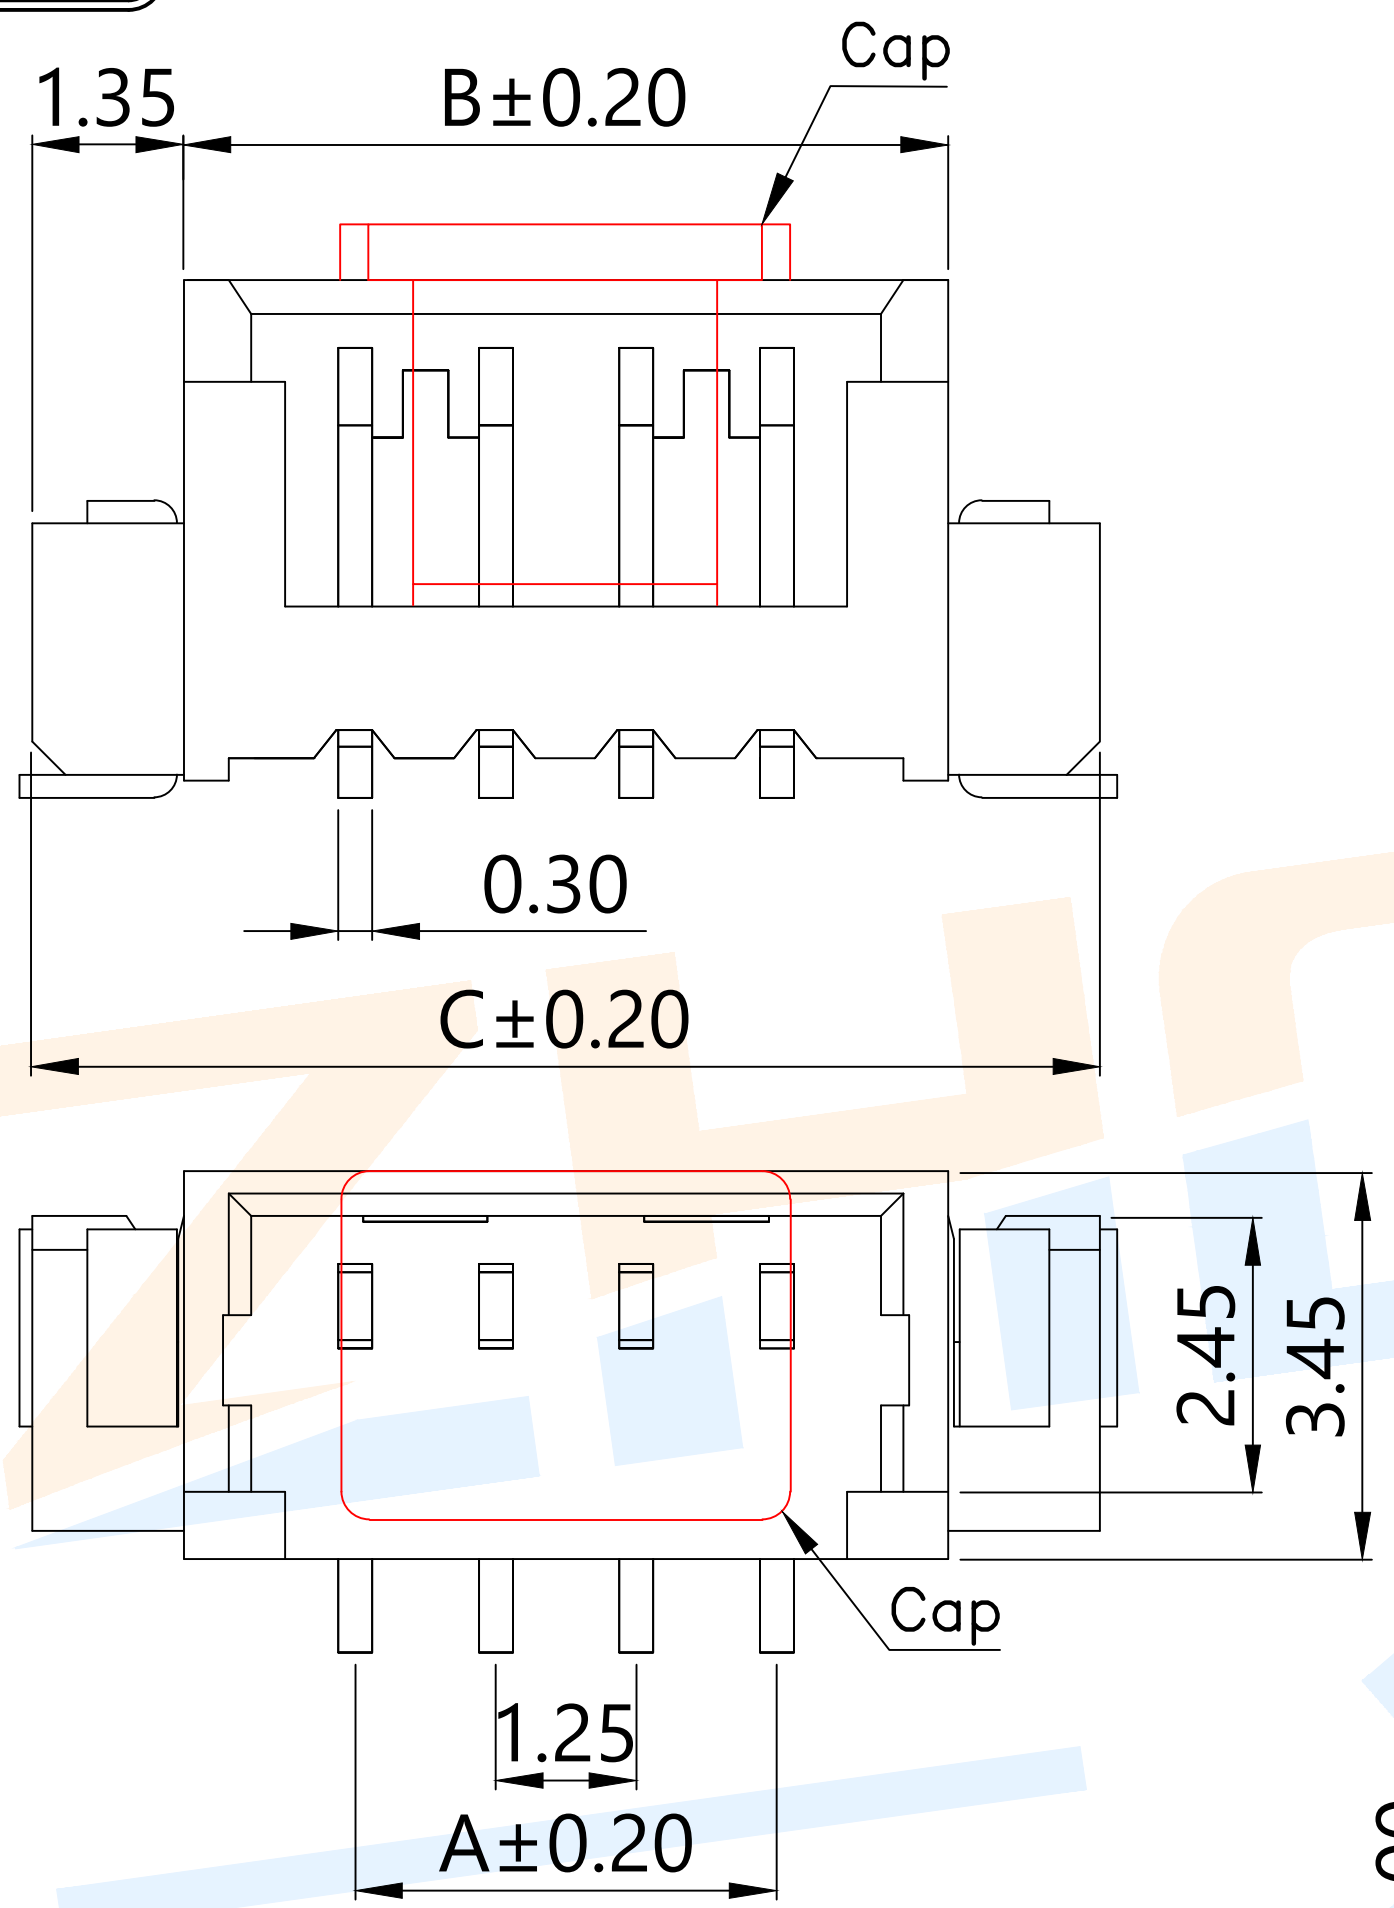

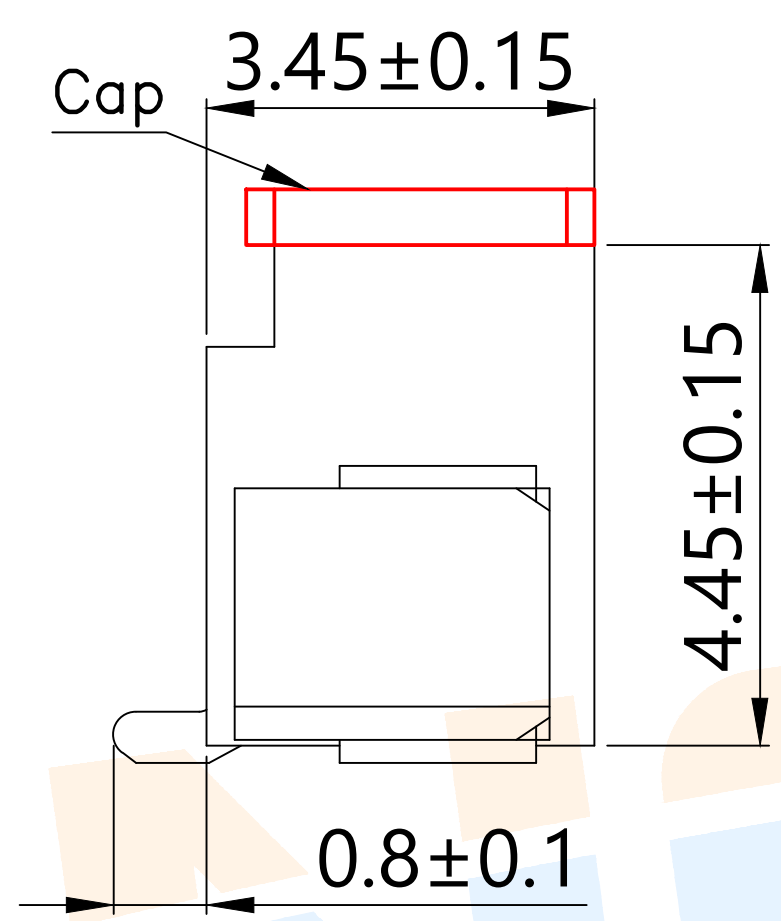

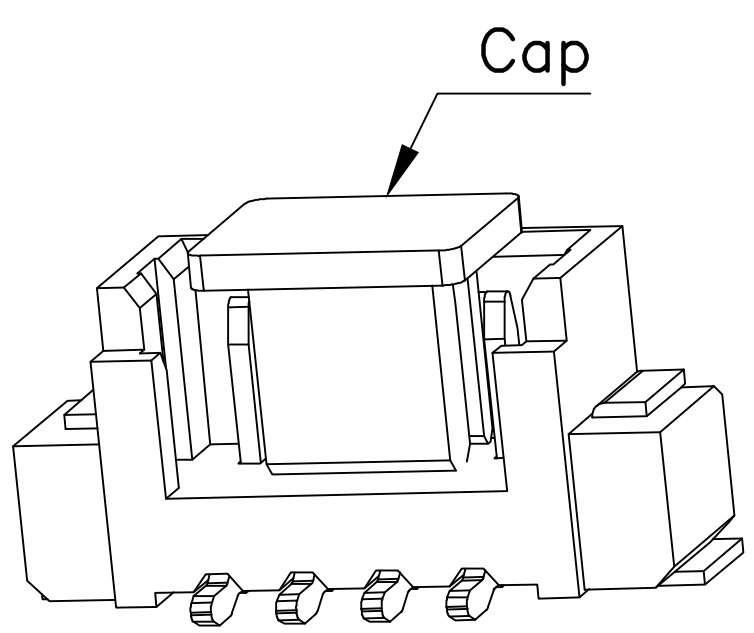

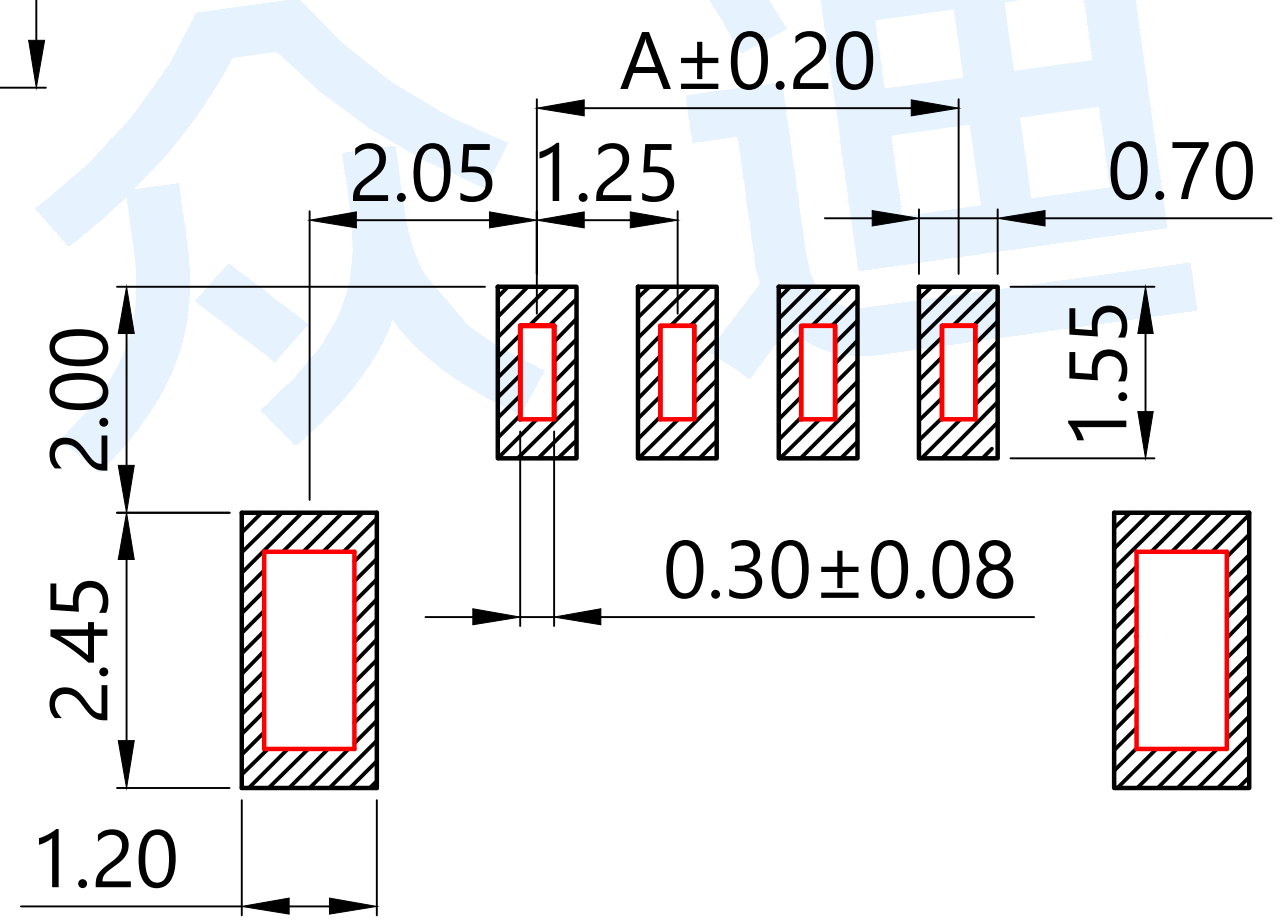

适用线路板(PCB LAYOUT)

Model No.	Pin	A	B	C
WAFER−MX1.25−2PLT−W1	2	1.25	4.30	7.00
WAFER−MX1.25−3PLT−W1	3	2.50	5.55	8.25
WAFER−MX1.25−4PLT−W1	4	3.75	6.80	9.50
WAFER−MX1.25−5PLT−W1	5	5.00	8.05	10.75
WAFER−MX1.25−6PLT−W1	6	6.25	9.30	12.00
WAFER−MX1.25−7PLT−W1	7	7.50	10.55	13.25
WAFER−MX1.25−8PLT−W1	8	8.75	11.80	14.50
WAFER−MX1.25−9PLT−W1	9	10.00	13.05	15.75
WAFER−MX1.25−10PLT−W1	10	11.25	14.30	17.00
WAFER−MX1.25−11PLT−W1	11	12.50	15.55	18.25
WAFER−MX1.25−12PLT−W1	12	13.75	16.80	19.50
WAFER−MX1.25−13PLT−W1	13	15.00	18.05	20.75
WAFER−MX1.25−14PLT−W1	14	16.25	19.30	22.00
WAFER−MX1.25−15PLT−W1	15	17.50	20.55	23.25
WAFER−MX1.25−16PLT−W1	16	18.75	21.80	24.50
WAFER−MX1.25−13PLT−W1	17	20.00	23.05	25.75
WAFER−MX1.25−14PLT−W1	18	21.25	24.30	27.00
WAFER−MX1.25−15PLT−W1	19	22.50	25.55	28.25
WAFER−MX1.25−16PLT−W1	20	23.75	26.80	29.50
WAFER−MX1.25−□□PLT−W1(−P=盘装,非盘装不启用)				

Specifications/技术规格:

1. Poles/线数：2～20P
2. Wire range/适用线规：AGW 32#～28#
3. Applicable PC board thickness/适用PC板厚度：0.6～1.2mm
4. Current rating/额定电流：1.0A
5. Voltage rating/额定电压：125V DC/AC
6. Insulation Resistance/绝缘电阻：100MΩ Min
7. Dielectric Withstanding/ 耐电压：500V AC/minute
8. Contact Resistance/ 接触电阻：20mΩ Max
9. Operating Temperature/ 工作温度：-25℃ to +85℃

NO.	Name	Number	Qty	Materil	Remarks
Ⓒ	Soldering lug		1	Brass	Plating Sn
Ⓑ	Terminal			Brass	Plating Sn
Ⓐ	Housing		1	LCP	Off White

ZHONGDI® 众迪 Zhongdi Electronic Technology Co., Ltd

angle	±2°	design		date		name	WAFER CONNECTOR
10~30	±0.30	Review		date			
5~10	±0.20	Approved		date		model	WAFER−MX1.25−□□PLT−W1
~ 5	±0.10	Drawing number:					

modify | Review | Approved | Tolerance not specified | Proportion 1:1 | unit mm | gape number | A4

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

ZHONGDI:

WAFER-HY2.0-6PLT-W1-P WAFER-MX1.25-4PWZ-C22-9T WAFER-ZH1.5-2PLT-W1-P
WAFER-ZH1.5-4PLT-W1-P WAFER-HY2.0-4PWT-W1-P WAFER-PH2.0-2PWT-W1-P
WAFER-SHB1.0-13PLT-W1-P WAFER-SHB1.0-8PWT-W1-P WAFER-SUR0.8-4PLT-W1-P
WAFER-VH3.96-3PWT-W1-P WAFER-XH2.54-12PWT-W1-P WAFER-MX1.25-5PZZ-C22-9T
WAFER-GH1.25-12PLT-W1-P WAFER-MX1.25-2PWZ-C22-9T WAFER-SUR0.8-14PWT-W1-P
WAFER-HY2.0-6PWT-W1-P WAFER-SH1.0-11PLT-W1-P WAFER-SH1.0-6PWT-W1-P
WAFER-ZH1.5-2PWT-W1-P WAFER-HY2.0-10PWT-W1-P WAFER-HY2.0-7PWT-W1-P
WAFER-ZH1.5-12PWT-W1-P WAFER-SH1.0-8PWT-W1-P WAFER-TJC8-2.54-12PZZ
WAFER-TJC8-2.54-2PWZ WAFER-VH3.96-5PWT-W1-P WAFER-XHB2.54-7PWT-W1-P
WAFER-GH1.25-14PWT-W1-P WAFER-MX1.25-5PLT-W1-P WAFER-SUR0.8-12PWT-W1-P