Crystal Clock Oscillator Specification

IQD Part No. + Packaging: LFSPXO056293Reel

Wurth Part No. ***831056293***

Description

- Standard 2.5 x 2.0 oscillator in a ceramic package with a hermetically sealed metal lid.
- Model IQXO-791
- Model Issue number 1

Frequency Parameters

- Frequency 20.0MHz
- Frequency Stability ±50.00ppm
- Operating Temperature Range -40.00 to 85.00°C
- Ageing ±3ppm max per year @ 25°C

Electrical Parameters

- Supply Voltage 3.3V ±10%
- Current Draw 10.000mA

Output Details

- Output Compatibility HCMOS
- Drive Capability 15pF
- Rise and Fall Time 10.0ns max
- Duty Cycle 40/60
- Output Voltage Levels:
  Output Low (VoL): 10%Vs max
  Output High (VoH): 90%Vs min
- Start Up Time: 10ms max

Output Control

- Stand-by Operation:
  Logic '1' (≥70% Vs) to pad 1 enables oscillator output.
  Logic '0' (≤30% Vs) to pad 1 disables oscillator output; when disabled the oscillator output goes to the high impedance state.
  No connection to pad 1 enables oscillator output.
- Stand-by Current: 10µA max

Noise Parameters


- Period Jitter (pk-pk): ±80ps typ
- Period Jitter (1σ): ±10ps typ
- Phase Jitter (12kHz to 20MHz): 1ps rms max

Environmental Parameters


- Storage Temperature Range: -55 to 125°C
- Shock: MIL-STD-202, Method 213. Or comparable.
- Vibration: MIL-STD-883, Method 2007, Condition A. Or comparable.

Manufacturing Details

- Maximum Process Temperature: 260°C (10secs max)
- Note: Do not connect inductor or bead between pad 2 and GND as it can make the output unstable.
- RoHS Terminations
- RoHS Reflow Temp 260°C max for 10secs max

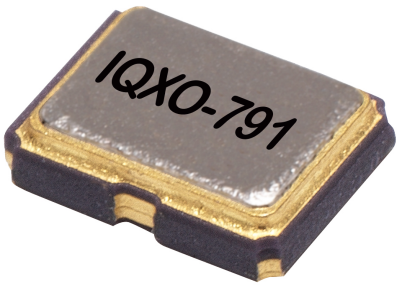

Outline (mm)

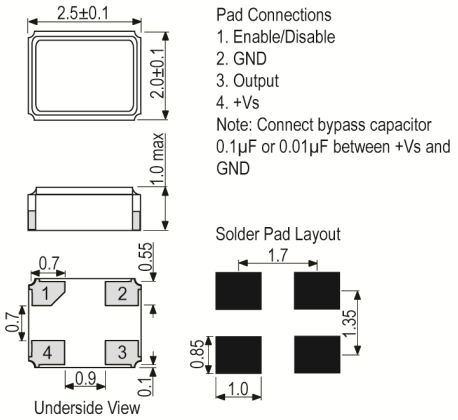

CONTACT INFORMATION:
Würth Elektronik eiSos GmbH & Co. KG
Max-Eyth-Str. 1, 74638 Waldenburg, Germany
Tel: +49(0) 7942 945-0

Email: eiSos@we-online.de
Web: www.we-online.com

Crystal Clock Oscillator Specification

IQD Part No. + Packaging: LFSPXO056293Reel
Wurth Part No. ***831056293***

Compliance

- RoHS Status (2011/65/EU) Compliant
- REACh Status Compliant
- MSL Rating (JDEC-STD-033): Not Applicable

Packaging Details

- Pack Style: Reel Tape & reel in accordance with EIA-481D
  Pack Size: 3,000
- *Alternative packing option available*

USEFUL LINKS

Toolbox:
www.we-online.com/toolbox

Product Catalog:
www.we-online.com/products

CONTACT INFORMATION:
Würth Elektronik eiSos GmbH & Co. KG
Max-Eyth-Str. 1, 74638 Waldenburg, Germany
Tel: +49(0) 7942 945-0

Email: eiSos@we-online.de
Web: www.we-online.com

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

WURTH:

971100477 687750225002 140816144200 636201040300 71206415 78438335033HT 810913006
830003237 744052002 7443633300 74437529203220 560112110188 560112110239 686124183822
784773147 810912012 714726110106 74438334022 74408942330 744393665015 782963560
860080275016 865230657014 64900221122 64900821122 665102131822 687640141002 830032817
620307124022 865080457015