



This document contains proprietary information and such informationmay not be disclosed to others for any purposes,
not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	———	H. wei	19/03/17	19/03/17

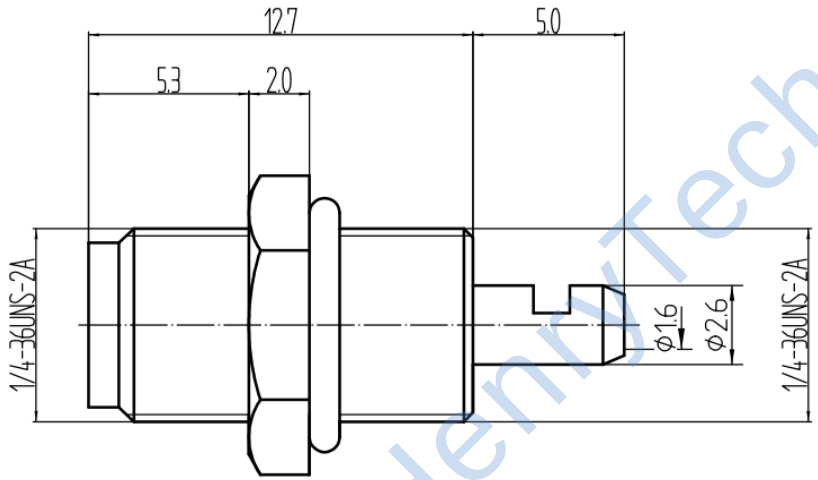



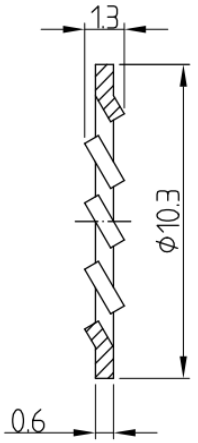

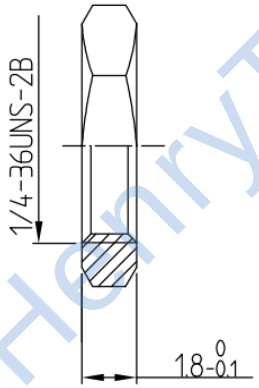

1 Electrical
1.1 Impedence 50 Ω
1.2 Frequency DC~6GHz
13 VSWR 1.30:1

2 Environmental&Mechanical
2.1 Temperature range -55℃~125℃
2.2 RoHs Compliant Yes
2.3 Durability 500 cycles

3 Materials&plating
3.1 Body: Brass Gold plated <4u'>
3.2 Insulator: Teflon
3.3 Contact Pin: Beryllium Copper; Gold plated<4u'>

Notes:
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: H. wei 19/03/17	TITLE: RF Coaxial Connector SMA Female Bulkhead Connector With RG178 Cable				
ENGINEER: L. yu 19/03/17		HenryTech			
APPROVED: W. yi 19/03/17		DIMENSION IN MILLIMETERS (mm)			
TOLERANCES UNLESS OTHERWISE SPEFICIED X ±0.50 .X ±0.20 .XX ±0.10 ANGLES ±1°	PART NO: HL-SMA-KYB178	SIZE: A4	SCALE: N/A	SHEET: 1/1	REV: A

HenryTech

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

HenryTech:

HT-LFCG-1700+ HT-LFCN-3800+ HX-SMA/SMP-JK HT-LFCN-400+ HN-LP7-0.5-1.27(9.4-2.8) HT-BFHKI-1572+ HT-LFCG-530+ HX-1.85-JJ H3-MABA-010551-CF1071 HG-SCN-2-22+ HL-SMA/SMB-KK HL-SMAMF-2-18-15dB HN-DC2016-0.5(12-4.6)M HT-HFCN-2700+ HT-HFCN-3800+ H3-MAPD-008109-C30040 H3-TC1-1TG2+ HG-SCN-2-65+ HL-MCX-KE-02 HLCC2250G HT-SCA-4-10+ HX-N-JK H3-MABA-011085 HL-N-KKC H2SYDC-20-62HP+ HT-QCN-19+ H3-MABA-007871-CT1A40 HL-SMA-KHD4 HL-SMB-K3DY HL-SSMA-KHD-1