wieland

Head office:
Wieland Electric GmbH
Brennerstraße 10 – 14
D-96052 Bamberg

Sales and Marketing Center:
Wieland Electric GmbH
Benzstraße 9
D-96052 Bamberg

Phone +49 (0951) 9324-0
Fax +49 (0951) 9324-198
www.wieland-electric.com
www.gesis.com
www.gesis-network.com
info@wieland-electric.com

AT Wieland

Components and system components for the control cabinet

- DIN rail terminal blocks
  - with screw connection
  - with spring clamp connection
  - with IDC connection
- Safety
  - Safety relays
  - Modular safety systems
- Fieldbus components
- Interface
  - Power supplies
  - Overvoltage protection
  - Measuring and monitoring relays
  - Time and switching relays
  - Coupling relays/solid state relays
  - Analog modules
  - Passive interfaces

Components and system components for field applications

- Remote automation
  - Remote power distribution
  - Remote fieldbus interface
- Industrial multipole connectors
  - Modular multipole connectors
  - High-density multipole connectors
  - High-current multipole connectors
  - Multipole connectors for hazardous areas
  - Bushings for control cabinets
  - D-Sub connectors
- Round connectors

Empty housings and appliance connectors/terminal strips

AT Schleicher

PLC systems and CNC based control systems

- Operator panels
- Application engineering & system solutions
- Customized products

BIT Wieland

- Building installation systems
  - Mains connectors IP20/IP65...IP68
  - Bus connectors
  - Combined connectors
  - Low-voltage connectors
  - Flexible flat cable systems
  - Distribution systems
  - Switching devices for EIB/KNX, LON, radio control
  - DIN rail terminal blocks for electrical installations
  - Overvoltage protection

PCB connectors Wieland

- PC board terminals/PC board connectors
  - with screw connection
  - with spring clamp connection
  - with TOP connection

fasis



wieland

fasis

DIN Rail Terminal Blocks with Tension Spring Connection



contacts are green.

0124.0 C 02/07

Product Range

A Touch of Spring in Installation.

DIN rail terminal blocks with tension spring connection, type *WKFN*

fasis STS

Technical information

- The information regarding cross sectional area and connection types pertains to unprepared wires without ferrules!
  Ferrules are not necessary for secure connection! Whenever ferrules are used, make sure that the tools specified by the manufacturer are used exclusively.
- The voltage ratings apply to the terminals in their intended application. When different products are mounted adjacent to each other, the proper isolation distances must be adhered to.
- If the ground blocks of the fasis product family are not used in block assemblies, but are mounted to the rail as single terminal blocks, end clamps have to be used.
- A detailed description of technical data, the standards requirements, and the application conditions are available in section ***facts*** & DATA of our master catalog.

ATEX regulation

- For the use of DIN rail terminal blocks in Ex areas, the regulations of EN60079-0 apply; whereas for increased safety Ex e the regulations of EN60079-7 must be followed. For an approximation of the laws of the EU member states directive 94/9/EG was created, which is generally known as ATEX 100a and which is the basis for harmonization in this field. ATEX stands for "atmosphere explosive" while 100a refers to the corresponding article of the EC contract.
- Directive ATEX 100a applies for protection against dust and gas explosions in all industrial Ex areas and in mining.
  The testing and certifying institutes named in directive ATEX 100a must follow accreditation procedures which are the same throughout Europe.
- In accordance with EN 60079-0/60079-7 and ATEX 100a, these certifying institutes write out EC certificates for prototype tests. These prototype test certificates for components together with the corresponding quality system certification of the supplier are required to obtain the so-called ATEX approval.
- In combination with the Ex-mark, the markings of the Wieland terminal blocks have the following meanings:

Ex	Identification
II	Device group
2	Category
G D	Areas
KEMA	Name of testing institute
ATEX...	Certificate, year of testing, number

Mounting instructions for Ex e applications

- If feed-through blocks are mounted directly adjacent to other feed-through blocks of a different size, or directly adjacent to ground blocks, the open side of the block group of the same type must be covered by an end plate or partition.
- If adjacent DIN rail terminal blocks are jumpered or if jumpered DIN rail terminal blocks are positioned next to unjumpered DIN rail terminal blocks, a partition plate must be inserted between the individual terminal block groups or at the beginning and end of a laterally or longitudinally connected terminal block (group) in order to meet the specified isolation distances. Notched out and jumpering cross connectors cannot be used in Ex areas.
- If the terminal blocks are combined with other certified series and sizes and when their accessories are used, the required creepage distances and clearances must be adhered to.
- DIN rail terminal blocks must be installed in a housing that meets the requirements of an approved protection type accord. to EN60079-0 section 1 or EN50281-1-1. The housing must have protection degree IP54 or higher depending on the protection type selected..
- The indicated values for the current carrying capability refer to a maximum ambient temperature of 40°C. When the terminal blocks are loaded with the maximum rated current according to EN 60079-0 the temperature rise will be max. 40 K.<

DQS certification for all company sectors

- Quality standard as per DIN ISO 9001 in Development, Production and Assembly
- Continued control of the quality standard by means of regular internal and external quality audits
- Compatible with certificates of other countries:
  - BSI Certificate, Great Britain
  - SQS Certificate, Switzerland
  - Aib-Vincotte Certificate, Belgium
  - ÖQS Certificate, Austria

DIN rail terminal blocks with tension spring connection


fasis











Our competence

"We at Wieland" don't do things by halves! Therefore we deliver our products in the highest quality possible and with user-friendly functions. Our 90 years of experience in electrical connections, our more than 20 years of experience in the field of spring clamp technology as well as the quality certifications according to ISO 90001:2000 and ISO 14001 guarantee this.

With products from **Wieland** you've got it all! Whether in ships, on cranes, in trains, or simply in control cabinets or systems, various areas of application stand for a unique know-how.

You as our customer determine our future

DIN rail terminal blocks can be found wherever power is generated, supplied, routed and distributed. Since their invention in the thirties of the last century, their basic design has not changed much. However, the entire surroundings in which terminal blocks are used have undergone a radical change – with the corresponding effects on design and performance capabilities of the connection systems.

We want satisfied customers who enter into long-term relations with us.

Squaring the circle for your benefit

DIN rail terminal blocks have to be marked visibly and be clearly assignable; it has to be possible to connect and jumper them flexibly and universally; finally they must enable testing under complete wiring and without having to disconnect the wires.

We have achieved this goal and have implemented these benefits for our customers with our ***fasis*** WKFN product series.

Your application is our challenge

Flexibility in connection technology, economic efficiency in stocking and reliability in the application – these are the benefits which ***fasis*** offers to our users.

If you require explosion or fire protection, vibration or shock resistance or international approvals for worldwide use then ***fasis*** provides the terminal blocks required for your application.


Individual service for your success

Connection technology is not our priority, as we master it anyway and our customers know it. We put our focus on the added value of our systems.

A user-friendly configuration software supports the wiring tasks while a marking software supports the marking activities. And for those who want to simplify their work in the control cabinet, we pre-assemble completely fitted terminal block assemblies – even with cables connected, if required. Individual components may be delivered within 24 hours under Wieland service **Quick 24**.

Subject to change without prior notice

fasis

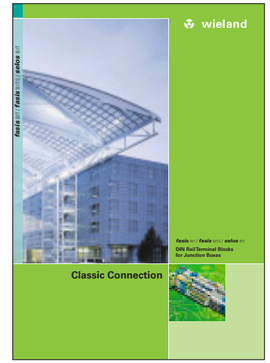


Catalog section

DIN Rail Terminal Blocks for Junction Boxes

Part no. 0117.0

 WKF 2,5/35	 WKF 2,5 D1/2/35	 WKF 4 /35	 WKF 4 D1/2/35	 WKF 16/35 PV/WKF
 WKF 6/35	 WKF 10/35	 WKIF 16/1 /35	 WKF 16/35	
 WKF 4 NT/35	 WKF 10 NT/35	 WKIF 16/1 NT/35		 WAK 16/2, WAK 35/2
 WKF 2,5 SL/35	 WKF 2,5 D1/2/SL/35	 WKF 4 SL/35	 WKF 4 D1/2/SL/35	
 WKF 6 SL/35	 WKF 10 SL/35	 WKIF 16/1 SL/35	 WKF 16 SL/35	
 WKIF 2,5 D	 WKIF 2,5 D-D WKIF 2,5 N-D	 WKIF 2,5 D-D-SL WKIF 2,5 N-D-SL	 WKIF 2,5 NT-D-SL	 WKIF 2,5 NTM-D-SL
 WKIS 2,5 D	 WKIS 2,5 D-D WKIS 2,5 N-D	 WKIS 2,5 D-D-SL WKIS 2,5 N-D-SL	 WKIS 2,5 NT-D-SL	 WKIS 2,5 NTM-D-SL
 Cross connector	 Notching tool	 PS WKC/F	Warning symbol/LEL	Screwdriver

Subject to change without prior notice

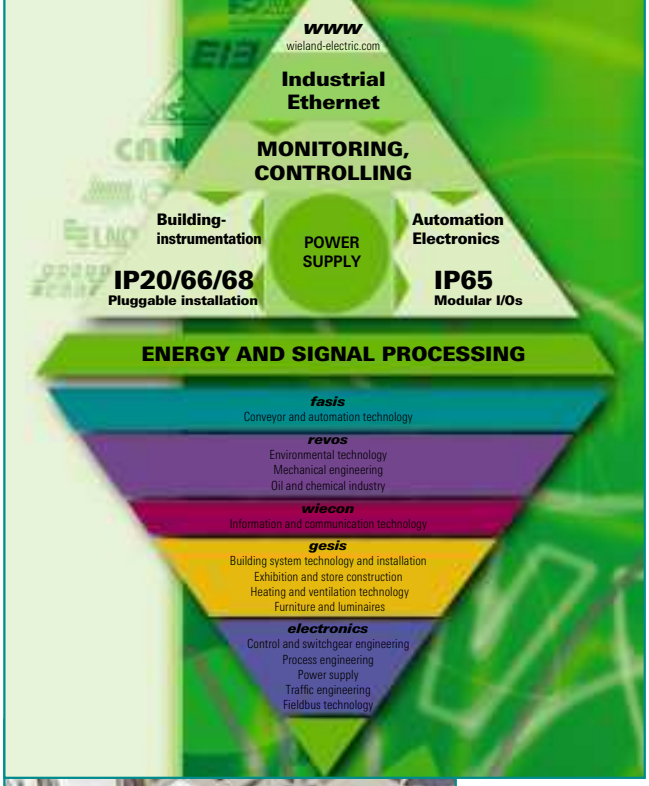



Since its invention, the tension spring connection technology has been established in the market as an industrial standard along with screw and crimp connection technology. Technical advantages such as easy handling and vibration-proof contacting as well as economic advantages such as time savings and cost reduction in wiring are responsible for this success.

Competence in spring connection technology means safety and reliability for the future.

You can find such a wide product range in tension spring connection technology only at **Wieland Electric** DIN rail terminal blocks, PC board connectors, electronic components, industrial multipole connectors or the pluggable electrical installation system.



■ *revos* – industrial multipole connectors

Our industrial multipole connectors provide reliable protection against dirt, dust and water, vapors, gases and electromagnetic influences.

Multipole adapters and contact inserts with tension spring technology are available in all standard sizes and are ideal for rough environments.

The dynamic terminal connection inside the connector ensures a durable and safe contact.




■ *Electronics* – electronic components

The quality of our electronic products is the basis for the high degree of reliability.

It is an important advantage of digital bus technology that signal processing is possible in field devices, and that intelligence can therefore be distributed in the field.

For this reason, ***ricos*** modules with channels that can be used optionally as input or as output can be as interesting as the clear wiring.

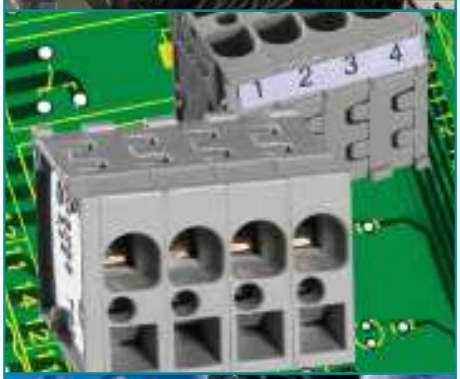

■ *wiecon* – PC board connectors

wiecon is a fixed component of innumerable innovative applications.

Clear identification, simple wire connection and an intelligent test function of the reliable tension spring connection stand for easy handling.

The service-friendly usability of ***wiecon*** is guaranteed!





■ *gesis*® – pluggable electrical installation

gesis – one name, one system!

The unique variety of components offers solutions for any kind of electrical installation. Consumer devices such as luminaires, sunblind drives, outlets or requirements for IP66/IP68 protection degree such as in automatic car wash systems, ships, airports and soccer stadiums can easily be incorporated in the installation system.


DIN rail terminal blocks with spring clamp connection

fasis

Page 16/17	 WKF 1,5/35	 WKF 1,5 D1/2/35	 WKF 1,5 D2/2/35		
Page 18/19	 WKF 1,5 SL/35	 WKF 1,5 D1/2/SL/35	 WKF 1,5 D2/2/SL/35		
Page 20/21	 WKFN 2,5 /35	 WKFN 2,5 D1/2/35	 WKFN 2,5 D2/2/35		 WKF 16 /35 PV/WKFN
Page 22/23	 WKFN 2,5 SL/35	 WKFN 2,5 D1/2/SL/35	 WKFN 2,5 D2/2/SL/35		
Page 24/25	 WKFN 4 /35	 WKFN 4 D1/2/35	 WKFN 4 D2/2/35		 WKF 16 /35 PV/WKFN
Page 26/27	 WKFN 4 SL/35	 WKFN 4 D1/2/SL/35	 WKFN 4 D2/2/SL/35		
Page 28/29	 WKFN 6/35	 WKFN 6 D1/2/35	 WKFN 6 SL/35	 WKFN 6 D1/2/SL/35	
Page 30/31	 WKFN 10/35	 WKFN 10 D1/2/35	 WKFN 10 SL/35	 WKFN 10 D1/2/SL/35	
Page 32/33	 WKFN 16/35	 WKFN 16 D1/2/35	 WKFN 16 SL/35	 WKFN 16 D1/2/SL/35	
Page 34/35	 WKF 35/35		 WKF 35 SL/35		






Subject to change without further notice

fasis

Page 36/37	 WKF 1,5 E2/35	 WKF 1,5 E2/VB/35	 WKF 1,5 E2/SL/35		
Page 38/39	 WKFN 2,5 E/35 WKFN 2,5 E/N/D/35	 WKFN 2,5 E/VB/35	 WKFN 2,5 E/D/SL/35 WKFN 2,5 E/N/SL/35	 WKFN 2,5 E/SL/35	
Page 40/41	 WKFN 2,5 E1/2/35 WKFN 2,5 E1/2/N/D/35	 WKFN 2,5 E1/2/VB/35	 WKFN 2,5 E1/2/D/SL/35 WKFN 2,5 E1/2/N/SL/35	 WKFN 2,5 E1/2/SL/35	
Page 42/43	 WKFN 2,5 E3/35	 WKFN 2,5 E3/VB/35	 WKFN 2,5 E3/D/D/SL/35 WKFN 2,5 E3/N/D/SL/35	 WKFN 2,5 E3/SL/35	
Page 44/45	 WKFN 4 E/35 WKFN 4 E/N/D/35	 WKFN 4 E/VB/35	 WKFN 4 E/D/SL/35 WKFN 4 E/N/SL/35	 WKFN 4 E/SL/35	
Page 46/47	 WKFN 2,5 E...G	 WKFN 2,5 E...G		 WKFN 4 E...G	 WKFN 4 E...G
Page 48/49	 WKFN 2,5 TKM/35	 WKFN 2,5 TKM 1/2/35	 WKFN 2,5 TKM 2/2/35		 WKF 16/35 PV/WKFN
Page 50/51	 WKFN 2,5 TKM E1/35	 WKFN 2,5 TKM E2/35			
Page 52/53	 WKFN 4 TKG with THSi 5 x 20	 WKFN 4 TKG with THSi 6,3 x 32			 WKF 16/35 PV/WKFN
Page 54/55	 WKFN 4 TKG with SiST	 WKFN 4 TKG with DiST			 WKF 16/35 PV/WKFN
Page 58/59	 WKF 1,5 KOI 3L WKF 1,5 KOI 3L-PGE	 WKF 1,5 KOI 3L/SL WKF 1,5 KOI 3L/SL-PGE	 WKF 1,5 KOE WKF 1,5 KOE-PGN		 VM WKF...

DIN rail terminal blocks with spring clamp connection

fasis


Page 62/63	 WKF 2,5 D2/8113/35	 WKF 2,5 D2/8113/SL/35	 WKF 1,5 E/8113/35	 WKF 1,5 E/35	 8113 BFK
Page 64/65			 WKF 4 3D/SL		
Page 66/67			 WKMF 2,5 /15	 WKMF 2,5 SL/15	
Page 68/69	 WKF 2,5 M/F	 WKF 2,5 MD/F		 WKF 2,5 M/R	 WKF 2,5 MD/R
Page 70/71	 WKF 2,5 M/15	 WKF 2,5 MD/15		 WKF 2,5 M/35	 WKF 2,5 MD/35
Page 72/73	 Cross connectors	 Notching tool	 PS WRC/F	 Warning symbol/LEL	 Screwdriver
Page 74/75	 TS 35x7,5	 TS 35x15	 TS 35x15	 9708/2 S35	 WEF 1/35
Page 76/77	 wieplan	 marcom	 wiemarc	 wieplot 500	 Accessories
Page 78/79	 Marking accessories	 Marking tags	 1.5 mm²/4 mm wide 2.5 mm²/5 mm wide	 4 mm²/6 mm wide	 10 mm²/10 mm wide 16 mm²/12 mm wide 35 mm²/16 mm wide
Page 80/81	 Ferrules	 Ferrules		 Stripping tool 0.08-10 mm²	 Pressing tools

Subject to change without further notice

fasis

DIN rail terminal blocks with tension spring connection

fasis

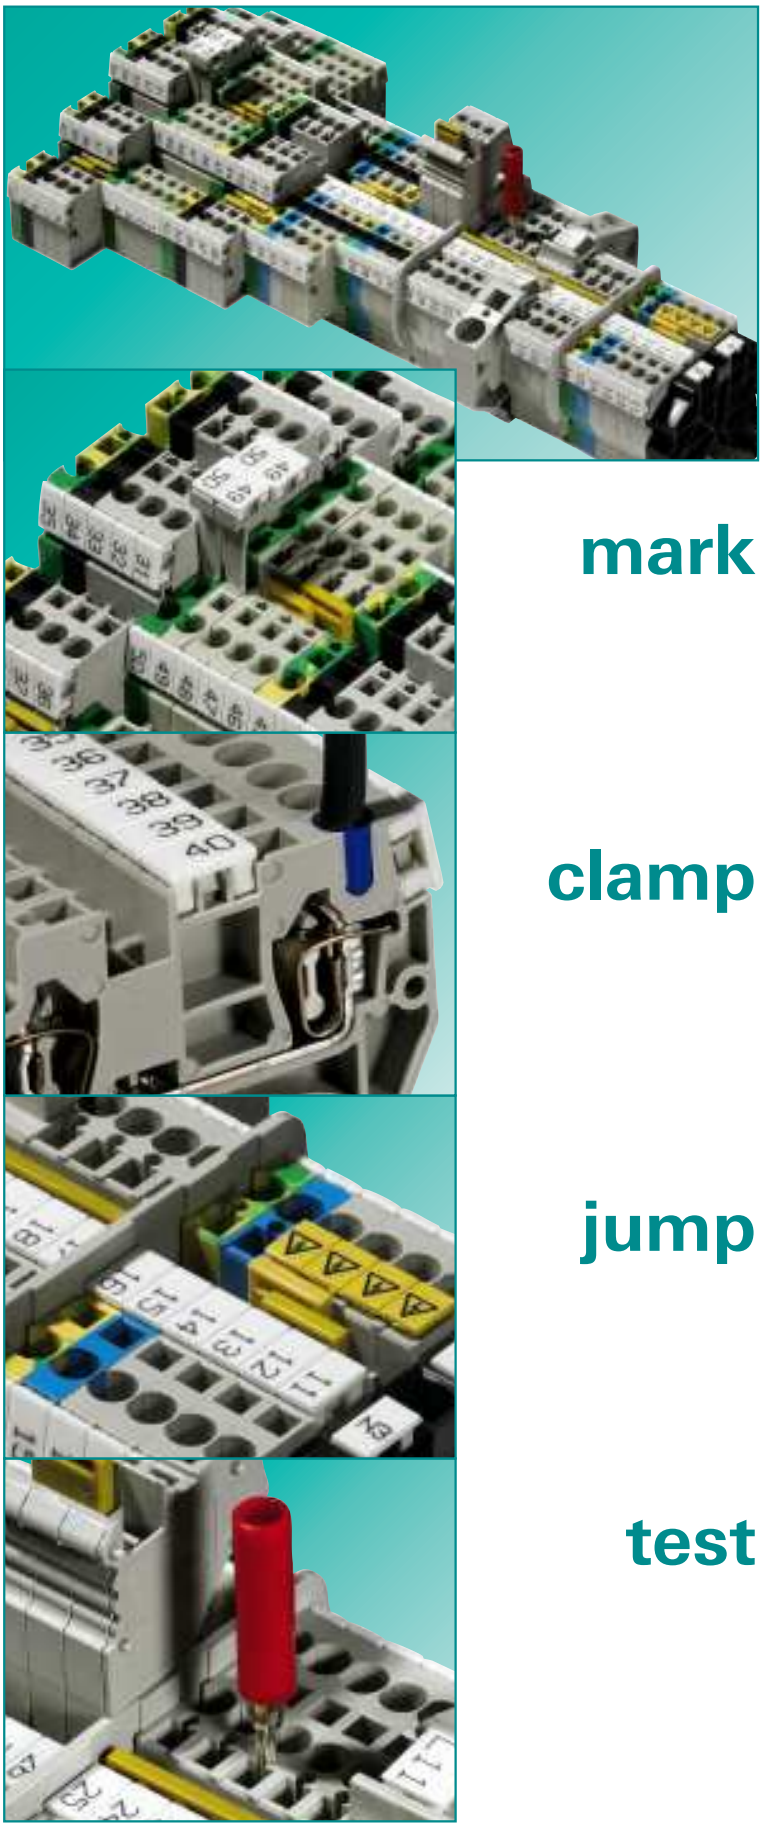

With its ***fasis*** WKFN series Wieland Electric offers you a complete range of DIN rail terminal blocks with tension spring technology.

The portfolio comprises feed-through and ground blocks with 2, 3 or 4 termination points, two-tier and three-tier blocks, single-tier and two-tier knife-edge disconnect blocks as well as fuse blocks. There are also function blocks with application-specific diode circuits available.

fasis WKFN has been designed for use in machine and system engineering as well as for hazardous areas.

Technical information as per EN 60947-7:

Rated cross section:	1.5–35 mm²
Rated current:	17.5 A–125 A
Rated voltage:	800/500 V
Wire range:	0.08–35 mm²

mark

Clearly mark all clamping points

Benefits:

- Marking tags easily readable even with the wires connected.
- Clear assignment of wire to termination point for easy wiring
- Simplified troubleshooting for maintenance operations
- Individual marking with the ***wiemarc*** marking system

clamp

Flexible and universal connection

Benefits:

- Clamping body as per gauge plug EN 60947-7
- Connection of solid, fine-stranded and stranded wires up to a conductor size larger than the rated cross section for example WKFN 2,5: 0.13 to 4 mm²
- Connection of fine-stranded wires with ferrules and insulated sleeve up to the rated cross section for example WKFN 2,5: 0.5 to 2.5 mm²

jump

Jumpering the terminal blocks on two channels

Benefits:

- Flexible potential distribution through staggered and chained arrangement of the cross connectors.
- Cost reduction in stockkeeping due to standardized variations (preferred number of poles)
- Potential distribution with supply blocks up to 76 A and standard connectors on feed-through terminal blocks.

test


Measuring voltage through integrated testing facility

Benefits:

- Testing when fully wired (including cross connector)
- Testing directly at the current-carrying bar
- Function test with modular test adapter through test point in the jumpering channel

Subject to change without further notice

fasis

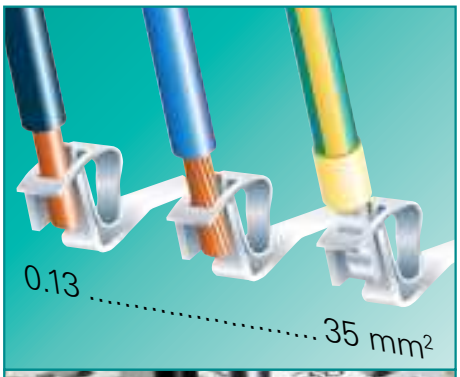

Tension spring connection technology

Durable electrical connection

Benefits:

- The tension spring system provides a dynamic clamping connection. Load-controlled and thermal cold flow properties of the connected wires are balanced.
- Maintenance-free and gas-tight electrical connection as specified by the approvals.
- Isolation of electrical and mechanical functions




Operating tool

Operated with a screwdriver

Benefits:

- Operation of the termination point does **not require any special tools.**
- For an optimal operation of our DIN rail terminal blocks with tension spring connection we recommend cylindrical screwdrivers with wedge-shaped blades according to DIN 5264 B in the size of the terminal blocks' rated cross sections.
- Also see the accessories for DIN rail terminal blocks on page 73!

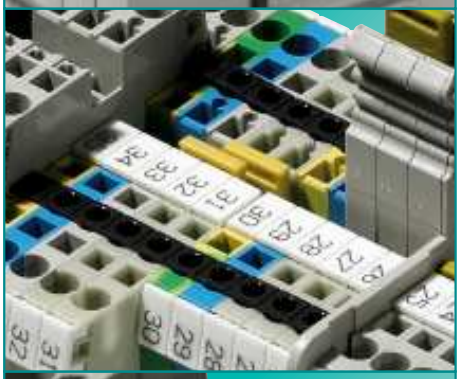

Wire entry guides

Safe connecting of "small cross sections"

Benefits:

- Ensures the connection of solid and fine-stranded wires smaller than 1 mm².
- Wire entry guides prevent the wires from being inserted too deeply (smaller than 1 mm²) and enable professional contacting.
- Also see the accessories for DIN rail terminal blocks on page 73!



Cover with warning symbol

Marking live potentials

Benefits:

- Cover with warning symbol snapped onto the blocks indicates (high) voltage even when the main switch is disconnected (VDE 0113).
- The cover can only be removed with a tool which ensures safety.
- Also see the accessories for DIN rail terminal blocks on page 73!



Materials


Selection of high-quality materials

Benefits

- Special alloys enable low feed-through resistance and provide a gas-tight contact area:
  Clamping spring: stainless CrNi steel
  Current-carrying bar: tin-plated copper
- Polyamide has excellent electrical, chemical and mechanical characteristics
  Temperature resistance: up to 120 °C
  Creepage resistance: CTI 600
  Flammability class: self-extinguishing, UL 94-V0

DIN rail terminal blocks with tension spring connection

fasis

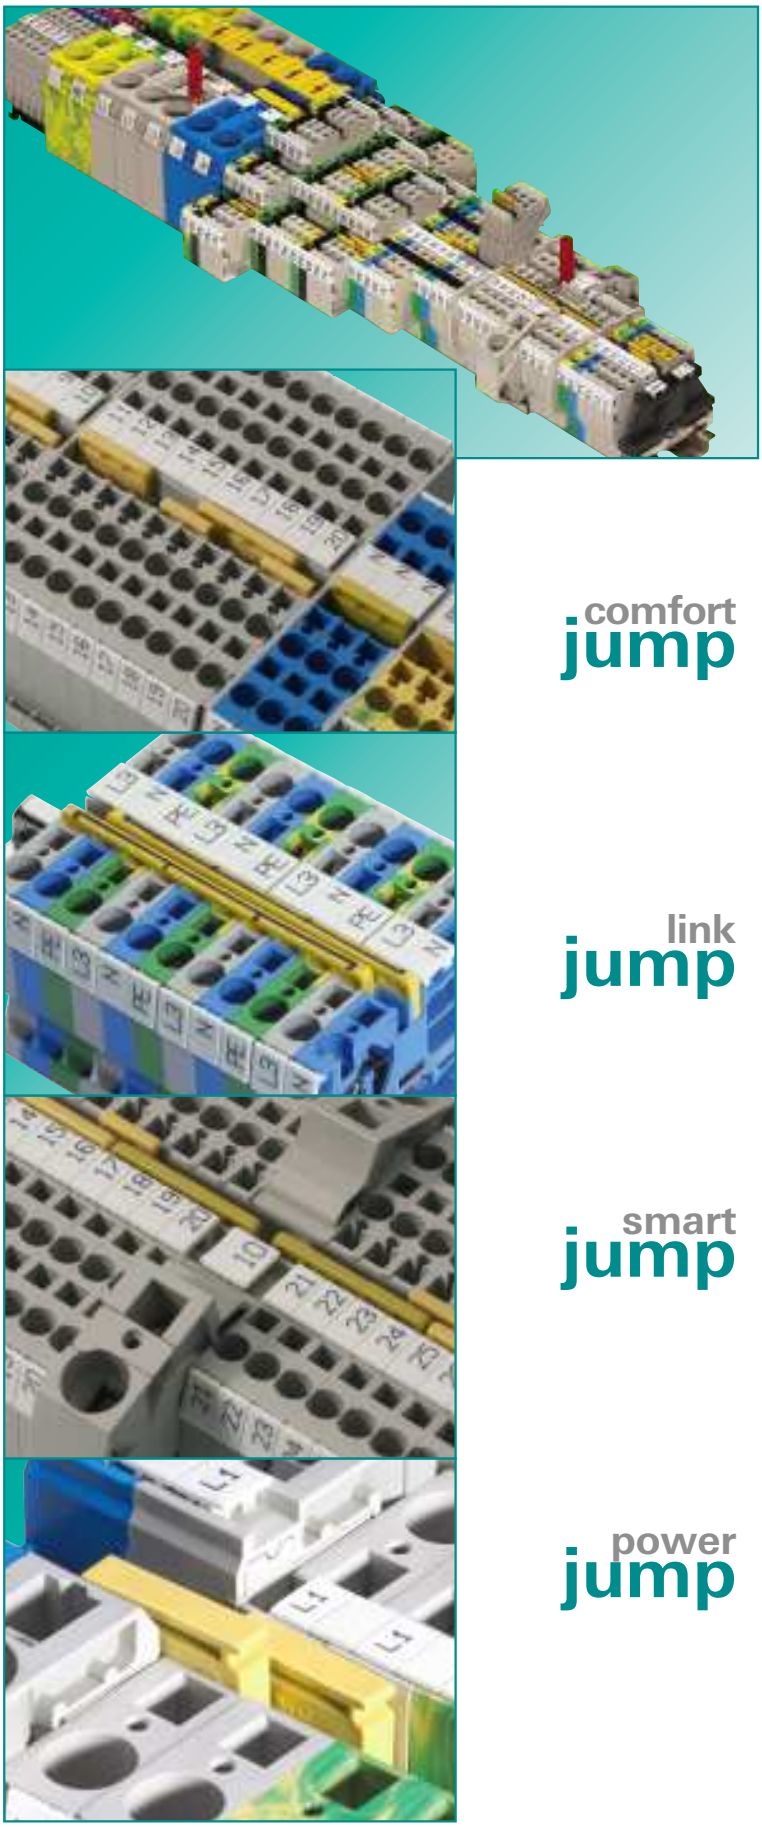

Power and potential distribution

With our ***fasis*** WKFN DIN rail terminal block system we focus on the application's system and flexibility. This mainly pays off in power and potential distribution.

fasis WKFN is consistently equipped with a two-channel jumpering system. Using standard cross connectors the potential can be distributed from the supply block to other DIN rail terminal blocks of type WKFN 2,5 and WKFN 4. Reducing jumpers for terminal blocks larger than 10 mm² are available as accessories for the distribution of high currents. Later extensions of the distribution system are not a problem and can be implemented quickly and flexibly!

What has proven for the termination point of the DIN rail terminal block is continued for the cross connectors, meaning we isolate the electrical and mechanical functions so that the electrical connections durably function as required and contribute to your system's operational safety.

comfort jump

Jumpering the terminal blocks on two channels

Benefits:

- Power performance through parallel supply of the electrical power
- Flexible potential distribution through staggered and chained arrangement of the cross connectors
- Cost reduction in stockkeeping due to standardized variations (preferred number of poles)

link jump

Easy potential interconnection

Benefits:

- Individual interconnection of potentials on the terminal block assembly
- Simply notch through pre-defined cutting edge
- Colored marking of the power circuit with pre-defined marking options

smart jump

Potenziale einfach verteilen

Benefits:

- Compact and closed design of supply block WKF 16/35 PV/WKFN for wires up to 16 mm²
- Parallel power distribution on one side or both sides to WKFN standard DIN rail terminal blocks
- Power distribution to WKFN 4 or WKFN 2,5 with standard cross connectors IVB WKF 4 or 2,5

power jump


Supply power up to 125 A

Benefits:

- Standard DIN rail terminal blocks WKFN 16 and 35 as supply block up to 50 mm²
- Power distribution through reducing jumpers from
  WKF 35 to WKFN 16
  WKF 35 to WKFN 10
  WKFN 16 to WKFN 10

Subject to change without further notice

fasis

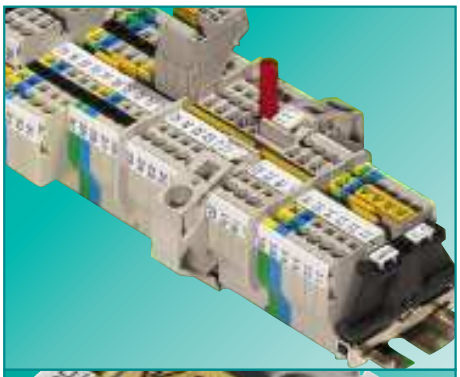

Function

Durably and safe "jumpering"


- The DIN rail terminal blocks with tension spring connection of the fasis product series can be "jumpered" using insulated cross connectors without screws.
- IP 20 protection against accidental contact is guaranteed even for inserted cross connectors.
- Isolation of the electrical and mechanical functions enables an optimal selection of materials without any compromise.
- The current-carrying bar makes it possible to apply the DIN rail terminal block's rated current to the cross connector.
- The contact spring balances the thermal cold flow properties of the current-carrying bar and thus ensures a durable electrical connection.
- Special alloys ensure a low contact resistance and a gas-tight contact area
  – Current-carrying bar: tin-plated copper
  – Contact spring: stainless CrNi steel



Application

Jumping with a system

- For the **smart jump** potential distribution insulated cross connectors in 2 to 20 pole designs are available.
- „Jumping" cross connectors are available to interconnect non-adjacent potentials to **link jump**.
- The **power jump** power distribution up to 125A is implemented using reducing cross connectors – see page 35.

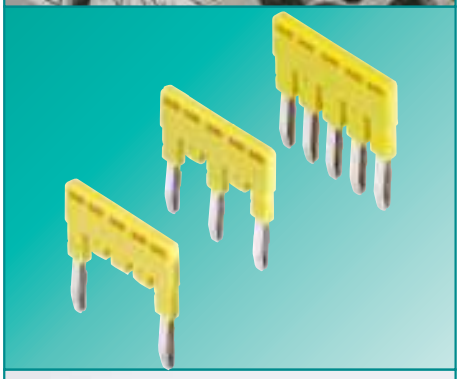

Pre-assembly

"Jumping" and distributing potentials

- The jumping potential interconnection is created with notched cross connectors.
- The notched cross connectors
  – can be prepared by the user as required for the application by using the Wieland notching tool, or
  – can be purchased already pre-assembled from Wieland.
- Staggered jumpering with notched cross connectors is only possible with the ***fasis*** WKFN series.



Flexibility

Individually notched cross connectors

- The notched cross connectors are prepared individually using the AKW/A notching tool.
- In order to easily cut out individual poles the cross connectors provide a pre-defined cutting edge.
- Notched cross connectors will reduce the rated voltage to 400 V.
- All cross connectors with several poles provide a pre-defined marking space which enables colored marking of the current and signal flow.

Subject to change without further notice

Configuration software for DIN rail terminal blocks, wieplan

fasis



wieplan was developed to provide you with a powerful software tool for the configuration of terminal block assemblies using Wieland DIN rail terminal blocks.

wieplan is available in 4 languages. It is user-friendly and its intuitive user interface guides you step by step through the entire configuration process. After completion you can optionally order your configured terminal block assembly from Wieland for complete pre-assembly.

Thus ***wieplan*** helps you to save time and money.



Managing projects

Benefits:

- To begin each configuration you automatically start from the basic project management menu.
- You create new projects and are reliably guided through the easy and practice-oriented program logics.
- You always have the choice of either opening an already existing project or of creating a new one.



Configuring terminal block assemblies without errors

Benefits:

- You work with high-quality graphs viewing the terminal blocks from the top; the accessories added are visible at any time.
- You continually use the plausibility check that reminds you of the accessories required such as end plates.
- You are provided with a product catalog with search function; you can add your own order numbers, if required; and you can create libraries for self-defined products.



Entering order data

Benefits:

- You enter your data such as invoice and delivery address in the order data screen only once and can use them for any follow-up orders.
- You may order by e-mail; in this case the terminal block assembly data are zipped automatically.



Terminal block assembly output

Benefits:

- You print out the order, the parts list and the drawing data, and, if required, your own order numbers.
- You create a DXF file and export the current terminal block assembly to a CAD program.
- You export the marking in CSV format including all marking data for further processing in ***wiemarc,*** for example.
- You can use a bidirectional interface available for your CAE system EPLAN.

Subject to change without further notice

Marking system for DIN rail terminal blocks, *wiemarc/wieplot*



Individual marking of DIN rail terminal blocks means ***wiemarc*** and ***wieplot.*** at Wieland Electric. The ***wieplot*** software was developed to provide you with maximum flexibility in marking your terminal block assemblies. Together with ***wieplot*** you have a powerful marking system that enables you to work professionally from the individual marking tag to series marking of your terminal block assemblies. You feel confident with the system due to its easy handling and visual representation of your marking, even when you use it for the first time.

But ***wieplot*** offers even more!

In addition to the marking tags for DIN rail terminal blocks you can also print self-adhesive tags and labels or cable markings. A slight modification can even make your plotter a powerful engraving system.



selos – fasis – taris

Marking with a system

- Individual marking of all terminal blocks for clear wire/ termination point assignment
- One single marking system for all designs
- Marking of individual tags; marking strips in the relevant terminal block spacing; or group markings
- Individual planning of terminal block assemblies and markings with ***wieplan***



wieplot

Ready for universal use


- Marks all common marking systems available for DIN rail terminal blocks
- Different marking tags can be marked individually in one single work step
- Marking of labels, self-adhesive tags and cables is possible



wiemarc

Easy and quick

- Simple and intuitive user interface
- Direct graphical display of the marking tags including plausibility check
- Customized layouts can be created individually
- Data import from CAD, Excel, text or ***wieplan*** files

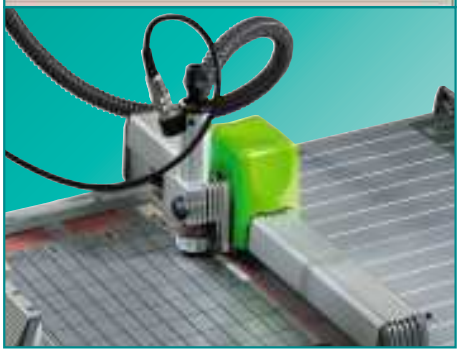


wieplot **engraving system**

Durable and safe – *wieplot* engraving system

- Easy modification to ***wieplot*** to make it an engraving system
- Engraving of multi-layer plastic boards
- Clean and dust-proof operation due to integrated vacuum device
- Create individual layouts using ***wiemarc***

DIN rail terminal blocks with tension spring connection

fasis

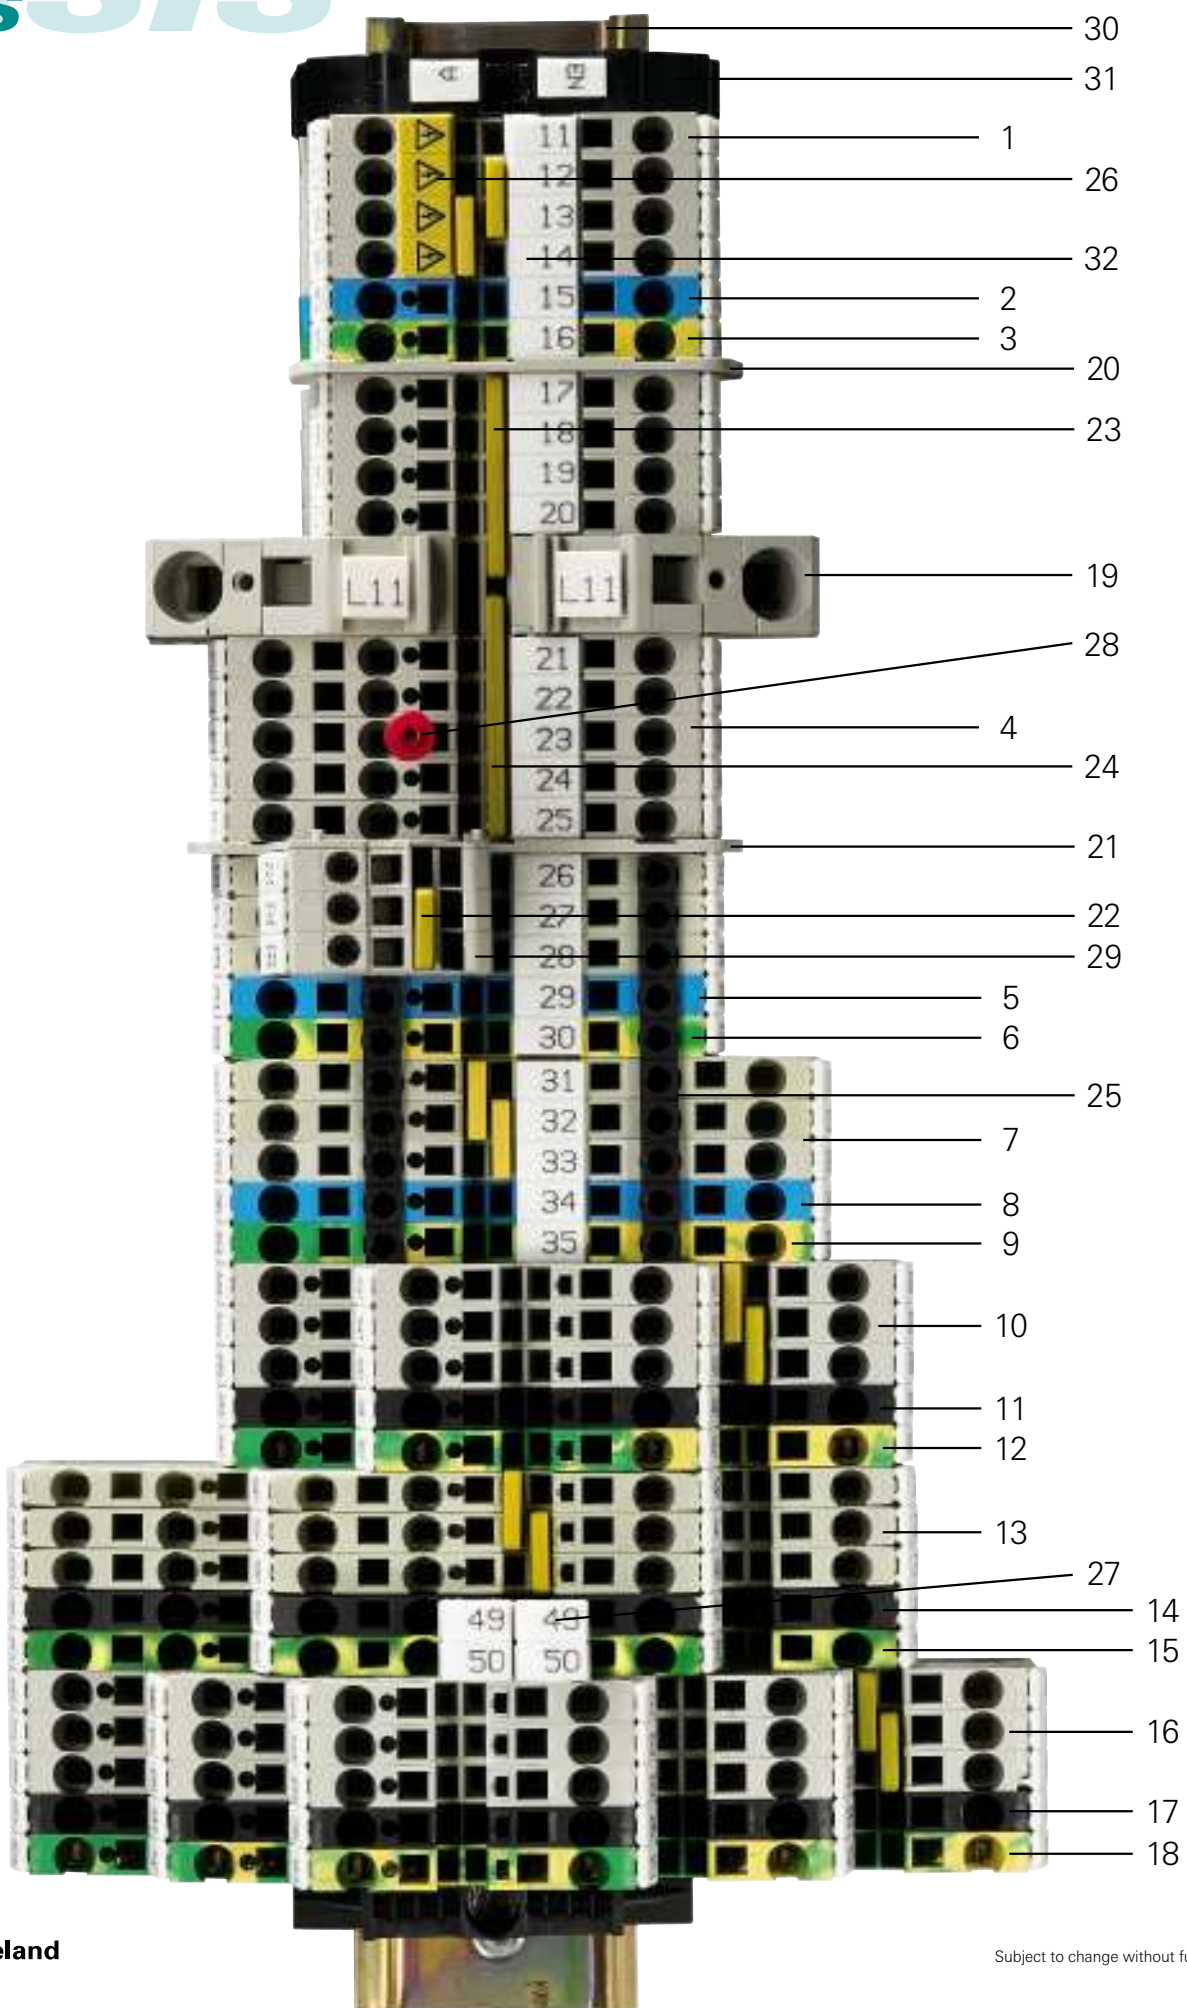


wieland

Subject to change without further notice


fasis


Pos.	Description	Type	Part number
1	Feed-through block	WKFN 2,5/35	56.703.0055.0
2	Feed-through block, blue	WKFN 2,5/35 BLAU	56.703.0055.6
3	Ground block	WKFN 2,5 SL/35	56.703.9055.0
4	Duo feed-through block	WKFN 2,5 D1/2/35	56.703.5055.0
5	Duo feed-through block, blue	WKFN 2,5 D1/2/35 BLAU	56.703.5055.6
6	Duo ground block	WKFN 2,5 D1/2/SL/35	56.703.9355.0
7	Duo feed-through block	WKFN 2,5 D2/2/35	56.703.5155.0
8	Duo feed-through block, blue	WKFN 2,5 D2/2/35 BLAU	56.703.5155.6
9	Duo ground block	WKFN 2,5 D2/2/SL/35	56.703.9155.0
10	Multi-tier block	WKFN 2,5 E/35	56.703.7055.0
11	Multi-tier block, connected	WKFN 2,5 E/VB/35	56.703.6955.1
12	Multi-tier ground block	WKFN 2,5 E/SL/35	56.703.8955.0
13	Duo multi-tier block	WKFN 2,5 E1/2/35	56.703.6055.0
14	Duo multi-tier block, connected	WKFN 2,5 E1/2/VB/35	56.703.5955.1
15	Duo multi-tier ground block	WKFN 2,5 E1/2/SL/35	56.703.6255.0
16	Multi-tier block	WKFN 2,5 E3/35	56.703.3055.0
17	Multi-tier block, connected	WKFN 2,5 E3/VB/35	56.703.2955.1
18	Multi-tier ground block	WKFN 2,5 E3/SL/35	56.703.8855.0
19	Supply block	WKF 16/35/PV/WKFN	56.716.0353.0
20	Partition	TWFN 2,5	07.312.6855.0
21	Partition	TWFN 2,5 D1/2	07.312.7055.0
22	Cross connector, insulated	IVB WKF 2,5-2	Z7.280.6227.0
23	Cross connector, insulated	IVB WKF 2,5-5	Z7.280.6527.0
24	Cross connector, insulated	IVB WKF 2,5-6	Z7.280.6627.0
25	Wire entry guide	LELN 2,5/3 SCHWARZ	05.564.3955.0
26	Cover with warning symbol	ADFN 2,5/4 GELB	04.343.8253.8
27	Marking tag carrier, 2-fold	ST 5/2	04.243.0755.0
28	Test plug with insulated handle	ST 2/2,3	Z5.553.2921.0
29	Test adapter, snap-on	PS WKC/F	Z1.299.9753.0
30	Mounting rail	35x27x7,5 EN 50022	98.300.0000.0
31	End clamp, without screw	WEF 1/35	Z5.523.9353.0
32	Marking strips	9705 A/5/10 B	04.845.xx53.0

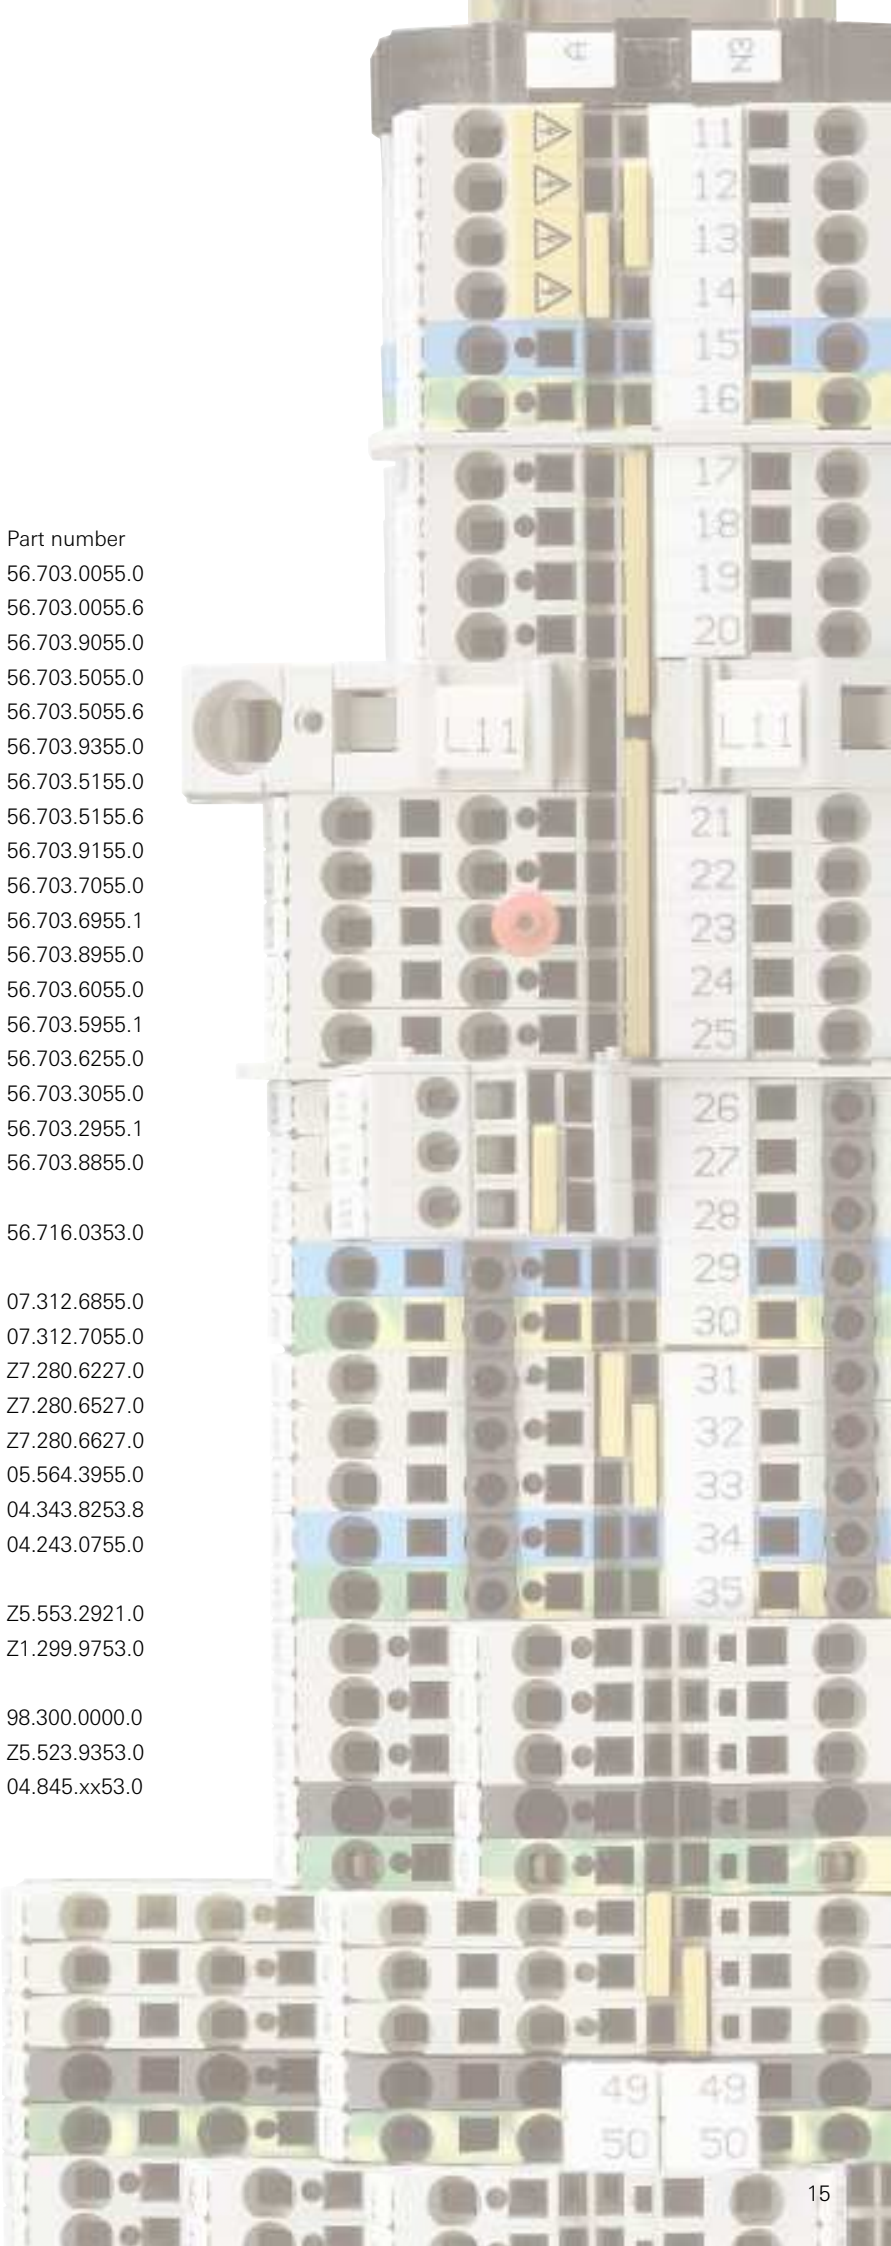

Duo feed-through blocks with tension spring connection

fasis



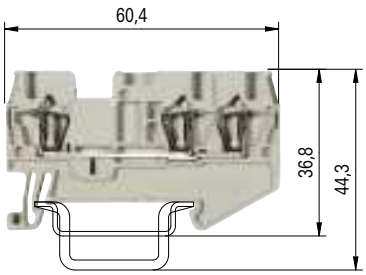

0344 ⟨Ex⟩ II 2GD
Ex e II
EN 60 947-7-1; 2002
UL ratings field/factory wiring
CSA ratings
KEMA 03 ATEX 2056 U1) EN 60079-0/EN 60079-7
Width Wire strip length
Approvals

WKF 1,5/35

fine-stranded	solid	V	A
0.08–1.5 mm²	0.08–1.5 mm²	500 V/6 kV/3	17.5
No. 26-14 AWG		300 V	15
No. 26-14 AWG		300 V	15
0.14–1.5 mm²	0.14–1.5 mm²	440 V*)	17.5/16.5[3)]
4 mm			10 mm

ATEX cULus CSA

WKF 1,5 D1/2/35


fine-stranded	solid	V	A
0.08–1.5 mm²	0.08–1.5 mm²	500 V/6 kV/3	17.5
No. 26-14 AWG		300 V	15
No. 26-14 AWG		300 V	15
0.14–1.5 mm²	0.14–1.5 mm²	440 V*)	17.5/16.5[3)]
4 mm			10 mm

ATEX cULus CSA

		Type	Part No.	Std. Pack	Type	Part No.	Std. Pack
Feed-through block	gray	WKF 1,5/35	56.702.0053.0	50	WKF 1,5 D1/2/35	56.702.5053.0	50
Feed-through block	blue	WKF 1,5/35 BLAU	56.702.0053.6	50	WKF 1,5 D1/2/35 BLAU	56.702.5053.6	50
Accessories							
1. Mounting rail 35, 7.5 mm high	L = 2 m	35x27x7,5 EN 60715	98.300.0000.0	1	35x27x7,5 EN 60715	98.300.0000.0	1
Mounting rail 35, 15 mm high	L = 2 m	35x24x15 EN 60715	98.360.0000.0	1	35x24x15 EN 60715	98.360.0000.0	1
2. End clamp TS 35, with screw[2)]	8 mm wide	9708/2 S35	Z5.522.8553.0	100	9708/2 S35	Z5.522.8553.0	100
End clamp TS 35, without screw	8 mm wide	WEF 1/35	Z5.523.9353.0	100	WEF 1/35	Z5.523.9353.0	100
3. End plate	gray	APF 1,5	07.312.8153.0	10	APF 1,5 D1/2	07.312.8353.0	10
	blue						
Segment end plate	gray				SAPF 1,5	07.312.8953.0	10
4. Partition plate	gray	TWF 1,5	07.312.8253.0	10	TWF 1,5 D1/2	07.312.8453.0	10
	blue						
5. Cross connector	2 pole	IVB WKF 1,5–2	Z7.268.0227.0	10	IVB WKF 1,5–2	Z7.268.0227.0	10
insulated	3 pole	IVB WKF 1,5–3	Z7.268.0327.0	10	IVB WKF 1,5–3	Z7.268.0327.0	10
	4 pole	IVB WKF 1,5–4	Z7.268.0427.0	10	IVB WKF 1,5–4	Z7.268.0427.0	10
	5 pole	IVB WKF 1,5–5	Z7.268.0527.0	10	IVB WKF 1,5–5	Z7.268.0527.0	10
	6 pole						
	7 pole						
	8 pole						
	10 pole	IVB WKF 1,5–10	Z7.268.1027.0	10	IVB WKF 1,5–10	Z7.268.1027.0	10
	20 pole	IVB WKF 1,5–20	Z7.268.2027.0	10	IVB WKF 1,5–20	Z7.268.2027.0	10
6. Wire entry guide	0.13–0.2 mm²	LEL 1,5/1 WEISS	05.564.4253.0	10	LEL 1,5/1 WEISS	05.564.4253.0	10
	0.25–0.5 mm²	LEL 1,5/2 GRAU	05.564.4353.0	10	LEL 1,5/2 GRAU	05.564.4353.0	10
	0.75–1.0 mm²						
7. Cover with warning symbol over 4 blocks		ADF 1,5/5 GELB	04.343.6953.8	10	ADF 1,5/5 GELB	04.343.6953.8	10
8. Marking tag carrier, 2-fold							
9. Test adapter, modular							
10. Test plug							
11. Screwdriver, uninsulated		DIN 5264 B 0,4x2,5	06.502.4300.0	5	DIN 5264 B 0,4x2,5	06.502.4300.0	5
Marking accessories see page 76–79							

*) For maintaining the proper isolation distances, the open side of a feed-through terminal block as well as both sides of a jumper are to be covered by partitions.
1) Follow the Ex installation instructions on the cover page. 2) Do not use in Ex environments. 3) Rated current when using cross connectors

Subject to change without further notice

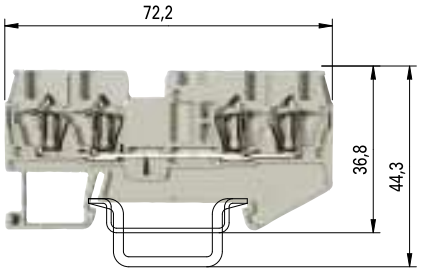

WKF 1,5 D2/2/35


fine-stranded	solid	V	A
0.08–1.5 mm²	0.08–1.5 mm²	500 V/6 kV/3	17.5
No. 26-14 AWG		300 V	15
No. 26-14 AWG		300 V	15
0.14–1.5 mm²	0.14–1.5 mm²	440 V*)	17.5/16.5[3)]
4 mm			10 mm


ATEX

Type	Part No.	Std. Pack
WKF 1,5 D2/2/35	56.702.5153.0	50
WKF 1,5 D2/2/35 BLAU	56.702.5153.6	50
35x27x7,5 EN 60715	98.300.0000.0	1
35x24x15 EN 60715	98.360.0000.0	1
9708/2 S35	Z5.522.8553.0	100
WEF 1/35	Z5.523.9353.0	100
APF 1,5 D2/2	07.312.8553.0	10
SAPF 1,5	07.312.8953.0	10
TWF 1,5 D2/2	07.312.8653.0	10
IVB WKF 1,5–2	Z7.268.0227.0	10
IVB WKF 1,5–3	Z7.268.0327.0	10
IVB WKF 1,5–4	Z7.268.0427.0	10
IVB WKF 1,5–5	Z7.268.0527.0	10
IVB WKF 1,5–10	Z7.268.1027.0	10
IVB WKF 1,5–20	Z7.268.2027.0	10
LEL 1,5/1 WEISS	05.564.4253.0	10
LEL 1,5/2 GRAU	05.564.4353.0	10
ADF 1,5/5 GELB	04.343.6953.8	10
DIN 5264 B 0,4x2,5	06.502.4300.0	5

Duo ground blocks with tension spring connection

fasis



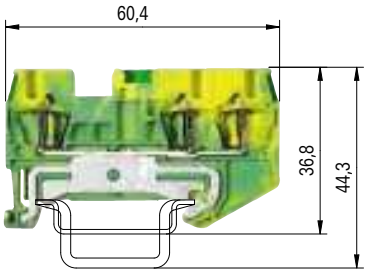

0344 ⟨Ex⟩ II 2GD
Ex e II
EN 60 947-7-2; 2002
UL ratings field/factory wiring
CSA ratings
KEMA 03 ATEX 2056 U1) EN 60079-0/EN 60079-7
Width Wire strip length
Approvals

WKF 1,5 SL/35

fine-stranded	solid	V	A
0.08–1.5 mm²	0.08–1.5 mm²	500 V/6 kV/3[4]	[3]
No. 26-14 AWG		300 V	
No. 26-14 AWG		300 V	
0.14–1.5 mm²	0.14–1.5 mm²	*)	

4 mm 10 mm

ATEX cULus CSA

WKF 1,5 D1/2/SL/35

fine-stranded	solid	V	A
0.08–1.5 mm²	0.08–1.5 mm²	500 V/6 kV/3[4]	[3]
No. 26-14 AWG		300 V	
No. 26-14 AWG		300 V	
0.14–1.5 mm²	0.14–1.5 mm²	*)	


4 mm 10 mm

ATEX cULus CSA

		Type	Part No.	Std. Pack	Type	Part No.	Std. Pack
Ground block	yellow/green	WKF 1,5 SL/35	56.702.9053.0	50	WKF 1,5 D1/2/SL/35	56.702.9353.0	50
Accessories							
1. Mounting rail 35, 7.5 mm high	L = 2 m	35x27x7,5 EN 60715	98.300.0000.0	1	35x27x7,5 EN 60715	98.300.0000.0	1
Mounting rail 35, 15 mm high	L = 2 m	35x24x15 EN 60715	98.360.0000.0	1	35x24x15 EN 60715	98.360.0000.0	1
2. End clamp TS 35, with screw[2]	8 mm wide	9708/2 S35	Z5.522.8553.0	100	9708/2 S35	Z5.522.8553.0	100
End clamp TS 35, without screw	8 mm wide	WEF 1/35	Z5.523.9353.0	100	WEF 1/35	Z5.523.9353.0	100
3. End plate	gray	APF 1,5	07.312.8153.0	10	APF 1,5 D1/2	07.312.8353.0	10
	blue						
Segment end plate	gray				SAPF 1,5	07.312.8953.0	10
4. Partition plate	gray	TWF 1,5	07.312.8253.0	10	TWF 1,5 D1/2	07.312.8453.0	10
	blue						
5. Cross connector	2 pole						
insulated	3 pole						
	4 pole						
	5 pole						
	6 pole						
	7 pole						
	8 pole						
	10 pole						
	20 pole						
6. Wire entry guide	0.13–0.2 mm²	LEL 1,5/1 WEISS	05.564.4253.0	10	LEL 1,5/1 WEISS	05.564.4253.0	10
	0.25–0.5 mm²	LEL 1,5/2 GRAU	05.564.4353.0	10	LEL 1,5/2 GRAU	05.564.4353.0	10
	0.75–1.0 mm²						
7. Cover with warning symbol over 4 blocks		ADF 1,5/5 GELB	04.343.6953.8	10	ADF 1,5/5 GELB	04.343.6953.8	10
8. Marking tag carrier, 2-fold							
9. Test adapter, modular							
10. Test plug							
11. Screwdriver, uninsulated		DIN 5264 B 0,4x2,5	06.502.4300.0	5	DIN 5264 B 0,4x2,5	06.502.4300.0	5
Marking accessories see page 76–79							

*) In order to maintain the proper isolation distances, the open side of a ground block is to be covered by an end plate.
[1] Follow the Ex installation instructions on the cover page.
[2] Do not use in Ex environments.
[3] For the current-carrying capabilities of the mounting rails see AT catalog section *facts* & DATA.
[4] Ratings to adjacent feed-through blocks of the same series and size

Subject to change without further notice

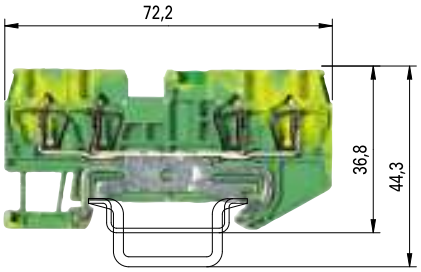

WKF 1,5 D2/2/SL/35


fine-stranded	solid	V	A
0.08–1.5 mm²	0.08–1.5 mm²	500 V/6 kV/3[4)]	[3)]
No. 26-14 AWG		300 V	
No. 26-14 AWG		300 V	
0.14–1.5 mm²	0.14–1.5 mm²	*)	
4 mm			10 mm


ATEX

Type	Part No.	Std. Pack
WKF 1,5 D2/2/SL/35	56.702.9153.0	50
35x27x7,5 EN 60715	98.300.0000.0	1
35x24x15 EN 60715	98.360.0000.0	1
9708/2 S35	Z5.522.8553.0	100
WEF 1/35	Z5.523.9353.0	100
APF 1,5 D2/2	07.312.8553.0	10
SAPF 1,5	07.312.8953.0	10
TWF 1,5 D2/2	07.312.8653.0	10
LEL 1,5/1 WEISS	05.564.4253.0	10
LEL 1,5/2 GRAU	05.564.4353.0	10
ADF 1,5/5 GELB	04.343.6953.8	10
DIN 5264 B 0,4x2,5	06.502.4300.0	5

Duo feed-through blocks with tension spring connection

fasis



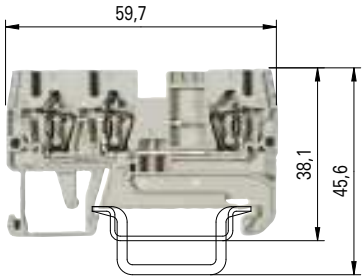

0344 Ⓔx II 2GD IM2
Ex e I/II
EN 60 947-7-1:2001
UL ratings field/factory wiring
CSA ratings
PTB 04 ATEX 1051 U1) EN 60 079-0/EN 60 079-7
Width Wire strip length
Approvals

WKFN 2,5/35

fine-stranded	solid	V	A
0.13–2.5 mm²	0.13–4 mm²	800 V/8 kV/3	24
No. 22-12 AWG		600 V	20
No. 24-12 AWG		600 V	24
0.2–2.5 mm²	0.13–4 mm²	550 V	22/21[2]
5 mm			11 mm

PTB VDE UL UL AEx CSA CSA Ex

WKFN 2,5 D1/2/35

fine-stranded	solid	V	A
0.13–2.5 mm²	0.13–4 mm²	800 V/8 kV/3	24
No. 22-12 AWG		600 V	20
No. 24-12 AWG		600 V	24
0.2–2.5 mm²	0.13–4 mm²	550 V	22/21[2]
5 mm			11 mm


PTB VDE UL UL AEx CSA CSA Ex

		Type	Part No.	Std. Pack	Type	Part No.	Std. Pack
Feed-through block	gray	WKFN 2,5/35	56.703.0055.0	100	WKFN 2,5 D1/2/35	56.703.5055.0	100
Feed-through block	blue	WKFN 2,5/35 BLAU	56.703.0055.6	100	WKFN 2,5 D1/2/35 BLAU	56.703.5055.6	100
Supply block	gray						
Accessories							
1. Mounting rail 35, 7.5 mm high	L = 2 m	35x27x7,5 EN 60715	98.300.0000.0	1	35x27x7,5 EN 60715	98.300.0000.0	1
Mounting rail 35, 15 mm high	L = 2 m	35x24x15 EN 60715	98.360.0000.0	1	35x24x15 EN 60715	98.360.0000.0	1
2. End clamp TS 35, with screw[2]	8 mm wide	9708/2 S35	Z5.522.8553.0	100	9708/2 S35	Z5.522.8553.0	100
End clamp TS 35, without screw	8 mm wide	WEF 1/35	Z5.523.9353.0	100	WEF 1/35	Z5.523.9353.0	100
3. End plate	gray	APFN 2,5	07.312.6755.0	10	APFN 2,5 D1/2	07.312.6955.0	10
	blue	APFN 2,5 BLAU	07.312.6755.6	10	APFN 2,5 D1/2 BLAU	07.312.6955.6	10
Segment end plate	gray						
4. Partition plate	gray	TWFN 2,5	07.312.6855.0	10	TWFN 2,5 D1/2	07.312.7055.0	10
	blue	TWFN 2,5 BLAU	07.312.6855.6	10	TWFN 2,5 D1/2 BLAU	07.312.7055.6	10
5. Cross connector	2 pole	IVB WKF 2,5–2	Z7.280.6227.0	10	IVB WKF 2,5–2	Z7.280.6227.0	10
insulated	3 pole	IVB WKF 2,5–3	Z7.280.6327.0	10	IVB WKF 2,5–3	Z7.280.6327.0	10
	4 pole	IVB WKF 2,5–4	Z7.280.6427.0	10	IVB WKF 2,5–4	Z7.280.6427.0	10
	5 pole	IVB WKF 2,5–5	Z7.280.6527.0	10	IVB WKF 2,5–5	Z7.280.6527.0	10
	6 pole	IVB WKF 2,5–6	Z7.280.6627.0	10	IVB WKF 2,5–6	Z7.280.6627.0	10
	7 pole	IVB WKF 2,5–7	Z7.280.6727.0	20	IVB WKF 2,5–7	Z7.280.6727.0	20
	8 pole	IVB WKF 2,5–8	Z7.280.6827.0	20	IVB WKF 2,5–8	Z7.280.6827.0	20
	9 pole	IVB WKF 2,5–9	Z7.280.6927.0	20	IVB WKF 2,5–9	Z7.280.6927.0	20
	10 pole	IVB WKF 2,5–10	Z7.280.7027.0	20	IVB WKF 2,5–10	Z7.280.7027.0	20
6. Wire entry guide	0.13–0.2 mm²	LELN 2,5/1 WEISS	05.564.3755.0	100	LELN 2,5/1 WEISS	05.564.3755.0	100
	0.25–0.5 mm²	LELN 2,5/2 GRAU	05.564.3855.0	100	LELN 2,5/2 GRAU	05.564.3855.0	100
	0.75–1.0 mm²	LELN 2,5/3 SCHWARZ	05.564.3955.0	100	LELN 2,5/3 SCHWARZ	05.564.3955.0	100
7. Cover with warning symbol over 4 blocks		ADFN 2,5/4 GELB	04.343.8353.8	10	ADFN 2,5/4 GELB	04.343.8353.8	10
8. Marking tag carrier, 2-fold							
9. Test adapter, modular		PS WKC/F	Z1.299.9753.0	10	PS WKC/F	Z1.299.9753.0	10
10. Test plug		ST 2/2,3	Z5.553.2921.0	10	ST 2/2,3	Z5.553.2921.0	10
11. Screwdriver, uninsulated		DIN 5264 B 0,6x3,5	06.502.4000.0	5	DIN 5264 B 0,6x3,5	06.502.4000.0	5
Screwdriver, uninsulated , MINI		DIN 5264 B 0,6x3,5 M	06.502.5000.0	10	DIN 5264 B 0,6x3,5 M	06.502.5000.0	10
Marking accessories see page 76–79							

[1] Follow the Ex installation instructions on the cover page.
[2] solid/fine-stranded

Subject to change without further notice



fasis

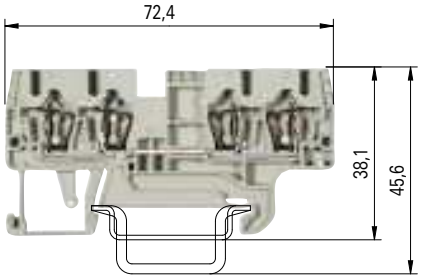


– Potential distribution with standard cross connector IVB WKF 2,5...

– Parallel connection of two cross connectors –> double jumpering

– Potential distributions are possible on one or both sides

Potential distribution				
Jumpering	one side		both sides	
	single	double	single	double
I_{max}	48	68	72	76
I_{Nblock}	24	24	24	24

$$I_{max} = \sum I_n \leq \sum I_{Nblock}$$

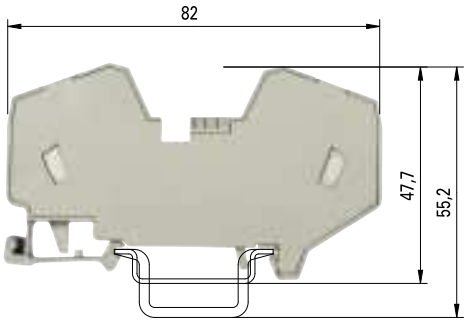

WKFN 2,5 D2/2/35

fine-stranded	solid	V	A
0.13–2.5 mm²	0.13–4 mm²	800 V/8 kV/3	24
No. 22-12 AWG		600 V	20
No. 24-12 AWG		600 V	24
0.2–2.5 mm²	0.13–4 mm²	550 V	22/21[2]
5 mm			11 mm

PTB VDE UL ULAEx CSA CSAEx

WKF 16/35 PV/WKFN

fine-stranded	solid/stranded	V	A
4–16 mm²	4–16 mm²	800 V/8 kV/3	76
No. 24-4 AWG		600 V	75
No. 12-4 AWG		600 V	78
4–16 mm²	4–16 mm²	690 V	64 A*
12 mm			15 mm

GL SEV NV UL CSA ATEX


Type	Part No.	Std. Pack
WKFN 2,5 D2/2/35	56.703.5155.0	100
WKFN 2,5 D2/2/35 BLAU	56.703.5155.6	100
35x27x7,5 EN 60715	98.300.0000.0	1
35x24x15 EN 60715	98.360.0000.0	1
9708/2 S35	Z5.522.8553.0	100
WEF 1/35	Z5.523.9353.0	100
APFN 2,5 D2/2	07.312.7155.0	10
APFN 2,5 D2/2 BLAU	07.312.7155.6	10
TWFN 2,5 D2/2	07.312.7255.0	10
TWFN 2,5 D2/2 BLAU	07.312.7255.6	10
IVB WKF 2,5–2	Z7.280.6227.0	10
IVB WKF 2,5–3	Z7.280.6327.0	10
IVB WKF 2,5–4	Z7.280.6427.0	10
IVB WKF 2,5–5	Z7.280.6527.0	10
IVB WKF 2,5–6	Z7.280.6627.0	10
IVB WKF 2,5–7	Z7.280.6727.0	20
IVB WKF 2,5–8	Z7.280.6827.0	20
IVB WKF 2,5–9	Z7.280.6927.0	20
IVB WKF 2,5–10	Z7.280.7027.0	20
LELN 2,5/1 WEISS	05.564.3755.0	100
LELN 2,5/2 GRAU	05.564.3855.0	100
LELN 2,5/3 SCHWARZ	05.564.3955.0	100
ADFN 2,5/4 GELB	04.343.8353.8	10
PS WKC/F	Z1.299.9753.0	10
ST 2/2,3	Z5.553.2921.0	10
DIN 5264 B 0,6x3,5	06.502.4000.0	5
DIN 5264 B 0,6x3,5 M	06.502.5000.0	10


Type	Part No.	Std. Pack
WKF 16/35 PV/WKFN	56.716.0353.0	20
35x27x7,5 EN 60715	98.300.0000.0	1
35x24x15 EN 60715	98.360.0000.0	1
9708/2 S35	Z5.522.8553.0	100
WEF 1/35	Z5.523.9353.0	100
IVB WKF 2,5–2	Z7.280.6227.0	10
IVB WKF 2,5–3	Z7.280.6327.0	10
IVB WKF 2,5–4	Z7.280.6427.0	10
IVB WKF 2,5–5	Z7.280.6527.0	10
IVB WKF 2,5–6	Z7.280.6627.0	10
IVB WKF 2,5–7	Z7.280.6727.0	20
IVB WKF 2,5–8	Z7.280.6827.0	20
IVB WKF 2,5–9	Z7.280.6927.0	20
IVB WKF 2,5–10	Z7.280.7027.0	20
ADF 16/4 GELB	04.343.6653.8	10
ST 2/2,3	Z5.553.2921.0	10
DIN 5264 B 1,0x5,5	06.502.4200.0	5

* Type-specific output currents upon request; KEMA 01 ATEX 2087 U[1]

Duo ground blocks with tension spring connection

fasis



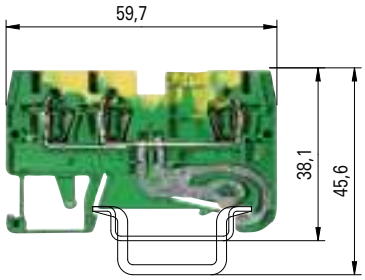

0344 ⟨Ex⟩ II 2GD IM2
Ex e I/II
EN 60 947-7-2:2002
UL ratings field/factory wiring
CSA ratings
PTB 04 ATEX 1051 U1) EN 60 079-0/EN 60 079-7
Width Wire strip length
Approvals

WKFN 2,5 SL/35

fine-stranded	solid	V	A
0.13–2.5 mm²	0.13–4 mm²	800 V/8 kV/3[4]	[3]
No. 22-12 AWG		600 V	
No. 24-12 AWG		600 V	
0.2–2.5 mm²	0.13–4 mm²		
5 mm		11 mm	

PTB VDE UL ULAEx CSA CSAEx

WKFN 2,5 D1/2/SL/35


fine-stranded	solid	V	A
0.13–2.5 mm²	0.13–4 mm²	800 V/8 kV/3[4]	[3]
No. 22-12 AWG		600 V	
No. 24-12 AWG		600 V	
0.2–2.5 mm²	0.13–4 mm²		
5 mm		11 mm	

PTB VDE UL ULAEx CSA CSAEx

		Type	Part No.	Std. Pack	Type	Part No.	Std. Pack
Ground block	green/yellow	WKFN 2,5 SL/35	56.703.9055.0	100	WKFN 2,5 D1/2/SL/35	56.703.9355.0	100
Accessories							
1. Mounting rail 35, 7.5 mm high	L = 2 m	35x27x7,5 EN 60715	98.300.0000.0	1	35x27x7,5 EN 60715	98.300.0000.0	1
Mounting rail 35, 15 mm high	L = 2 m	35x24x15 EN 60715	98.360.0000.0	1	35x24x15 EN 60715	98.360.0000.0	1
2. End clamp TS 35, with screw	8 mm wide	9708/2 S35	Z5.522.8553.0	100	9708/2 S35	Z5.522.8553.0	100
End clamp TS 35, without screw	8 mm wide	WEF 1/35	Z5.523.9353.0	100	WEF 1/35	Z5.523.9353.0	100
3. End plate	gray						
	blue						
	green/yellow	APFN 2,5 GRÜN	07.312.6755.7	10	APFN 2,5 D1/2 GRÜN	07.312.6955.7	10
4. Partition plate	gray						
	blue						
5. Cross connector	2 pole						
insulated (jumper bar)	3 pole						
	4 pole						
	5 pole						
	6 pole						
	7 pole						
	8 pole						
	9 pole						
	10 pole						
6. Wire entry guide	0.13–0.2 mm²	LELN 2,5/1 WEISS	05.564.3755.0	100	LELN 2,5/1 WEISS	05.564.3755.0	100
	0.25–0.5 mm²	LELN 2,5/2 GRAU	05.564.3855.0	100	LELN 2,5/2 GRAU	05.564.3855.0	100
	0.75–1.0 mm²	LELN 2,5/3 SCHWARZ	05.564.3955.0	100	LELN 2,5/3 SCHWARZ	05.564.3955.0	100
7. Cover with warning symbol over 4 blocks		ADFN 2,5/4 GELB	04.343.8353.8	10	ADFN 2,5/4 GELB	04.343.8353.8	10
8. Marking tag carrier, 2-fold							
9. Test adapter, modular							
10. Test plug							
11. Screwdriver, uninsulated		DIN 5264 B 0,6x3,5	06.502.4000.0	5	DIN 5264 B 0,6x3,5	06.502.4000.0	5
Screwdriver, uninsulated, MINI		DIN 5264 B 0,6x3,5 M	06.502.5000.0	10	DIN 5264 B 0,6x3,5 M	06.502.5000.0	10
Marking accessories see page 76–79							

[1] Follow the Ex installation instructions on the cover page.
[3] For the current-carrying capabilities of the mounting rails see AT catalog section *facts* & DATA.
[4] Ratings to adjacent feed-through blocks of the same series and size

Subject to change without further notice

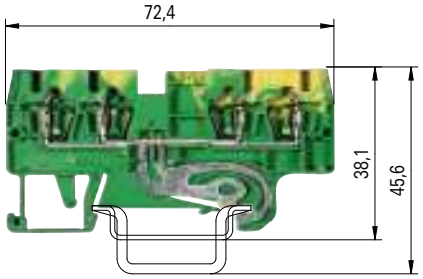

WKFN 2,5 D2/2/SL/35


fine-stranded	solid	V	A
0.13–2.5 mm²	0.13–4 mm²	800 V/8 kV/3[4]	[3]
No. 22-12 AWG		600 V	
No. 24-12 AWG		600 V	
0.2–2.5 mm²	0.13–4 mm²		
5 mm			11 mm


PTB

Type	Part No.	Std. Pack
WKFN 2,5 D2/2/SL/35	56.703.9155.0	100
35x27x7,5 EN 60715	98.300.0000.0	1
35x24x15 EN 60715	98.360.0000.0	1
9708/2 S35	Z5.522.8553.0	100
WEF 1/35	Z5.523.9353.0	100
APFN 2,5 D2/2 GRÜN	07.312.7155.7	10
LELN 2,5/1 WEISS	05.564.3755.0	100
LELN 2,5/2 GRAU	05.564.3855.0	100
LELN 2,5/3 SCHWARZ	05.564.3955.0	100
ADFN 2,5/4 GELB	04.343.8353.8	10
DIN 5264 B 0,6x3,5	06.502.4000.0	5
DIN 5264 B 0,6x3,5 M	06.502.5000.0	10

Duo feed-through blocks with tension spring connection

fasis



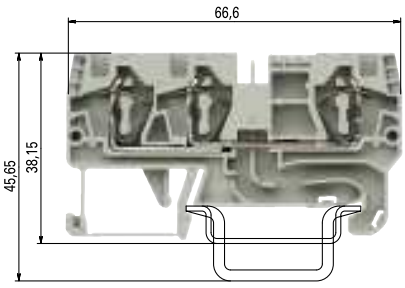

0344 ⟨Ex⟩ II 2GD IM2
Ex e I/II
EN 60 947-7-1:2002
UL ratings field/factory wiring
CSA ratings
PTB 05 ATEX 1104 U1) EN 60 079-0/EN 60 079-7
Width Wire strip length
Approvals

WKFN 4 /35

fine-stranded	solid	V	A
0.13–4 mm²	0.13–6 mm²	800 V/8 kV/3	32
No. 24-10 AWG		600 V	30
No. 24-10 AWG		600 V	32
0.13–4 mm²	0.2–6 mm²	690 V	28/25.5[2]
6 mm			11 mm

VDE PTB

WKFN 4 D1/2/35

fine-stranded	solid	V	A
0.13–4 mm²	0.13–6 mm²	800 V/8 kV/3	32
No. 24-10 AWG		600 V	30
No. 24-10 AWG		600 V	32
0.13–4 mm²	0.2–6 mm²	550 V	28/25.5[2]
6 mm			11 mm

VDE PTB

		Type	Part No.	Std. Pack	Type	Part No.	Std. Pack
Feed-through block	gray	WKFN 4/35	56.704.0055.0	100	WKFN 4 D1/2/35	56.704.5055.0	100
Feed-through block	blue	WKFN 4/35 BLAU	56.704.0055.6	100	WKFN 4 D1/2/35 BLAU	56.704.5055.6	100
Supply block	gray						
Accessories							
1. Mounting rail 35, 7.5 mm high	L = 2 m	35x27x7,5 EN 60715	98.300.0000.0	1	35x27x7,5 EN 60715	98.300.0000.0	1
Mounting rail 35, 15 mm high	L = 2 m	35x24x15 EN 60715	98.360.0000.0	1	35x24x15 EN 60715	98.360.0000.0	1
2. End clamp TS 35, with screw	8 mm wide	9708/2 S35	Z5.522.8553.0	100	9708/2 S35	Z5.522.8553.0	100
End clamp TS 35, without screw	8 mm wide	WEF 1/35	Z5.523.9353.0	100	WEF 1/35	Z5.523.9353.0	100
3. End plate	gray	APFN 4	07.312.9255.0	10	APFN 4 D1/2	07.312.9455.0	10
	blue	APFN 4 BLAU	07.312.9255.6	10	APFN 4 D1/2 BLAU	07.312.9455.6	10
Segment end plate	gray						
4. Partition plate	gray	TWFN 4	07.312.9355.0	10	TWFN 4 D1/2	07.312.9555.0	10
	blue	TWFN 4 BLAU	07.312.9355.6	10	TWFN 4 D1/2 BLAU	07.312.9555.6	10
5. Cross connector	2 pole	IVB WKF 4–2	Z7.261.1227.0	10	IVB WKF 4–2	Z7.261.1227.0	10
insulate	3 pole	IVB WKF 4–3	Z7.261.1327.0	10	IVB WKF 4–3	Z7.261.1327.0	10
	4 pole	IVB WKF 4–4	Z7.261.1427.0	10	IVB WKF 4–4	Z7.261.1427.0	10
	5 pole	IVB WKF 4–5	Z7.261.1527.0	10	IVB WKF 4–5	Z7.261.1527.0	10
	6 pole	IVB WKF 4–6	Z7.261.1627.0	10	IVB WKF 4–6	Z7.261.1627.0	10
	7 pole	IVB WKF 4–7	Z7.261.1727.0	20	IVB WKF 4–7	Z7.261.1727.0	20
	8 pole	IVB WKF 4–8	Z7.261.1827.0	20	IVB WKF 4–8	Z7.261.1827.0	20
	9 pole	IVB WKF 4–9	Z7.261.1927.0	20	IVB WKF 4–9	Z7.261.1927.0	20
	10 pole	IVB WKF 4–10	Z7.261.2027.0	20	IVB WKF 4–10	Z7.261.2027.0	20
6. Vertical Jumper, insulated	1 pole						
7. Wire entry guide	0,13–0,2 mm²	LEL 4/1 WEISS	05.561.8553.0	100	LEL 4/1 WEISS	05.561.8553.0	100
	0,25–0,5 mm²	LEL 4/2 GRAU	05.561.8653.0	100	LEL 4/2 GRAU	05.561.8653.0	100
	0,75–1,0 mm²	LEL 4/3 SCHWARZ	05.561.8753.0	100	LEL 4/3 SCHWARZ	05.561.8753.0	100
8. Cover with warning symbol over 4 blocks		ADF 4/4 GELB	04.343.6153.8	10	ADF 4/4 GELB	04.343.6153.8	10
9. Marking tag carrier, 2-fold							
10. Test adapter, modular		PS WKC/F	Z1.299.9753.0	10	PS WKC/F	Z1.299.9753.0	10
11. Test plug		ST 2/2,3	Z5.553.2921.0	10	ST 2/2,3	Z5.553.2921.0	10
12. Screwdriver, uninsulated		DIN 5264 B 0,6x3,5	06.502.4000.0	5	DIN 5264 B 0,6x3,5	06.502.4000.0	5
Screwdriver, uninsulated, MINI		DIN 5264 B 0,6x3,5 M	06.502.5000.0	10	DIN 5264 B 0,6x3,5 M	06.502.5000.0	10


Marking accessories see page 76–79

[1] Follow the Ex installation instructions on the cover page..

[2] solid/fine-stranded

Subject to change without further notice



fasis

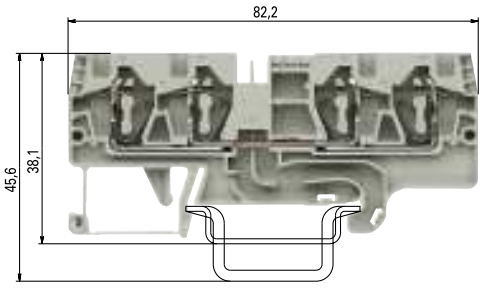


– Potential distribution with standard cross connector IVB WKF 4...

– Parallel connection of two cross connectors –> double jumpering

– Potential distributions are possible on one or both sides

Potential distribution				
Jumpering	one side		both sides	
	single	double	single	double
I_{max}	64	76	76	76
I_{Nblock}	32	32	32	32

$$I_{max} = \sum I_n \leq \sum I_{Nblock}$$

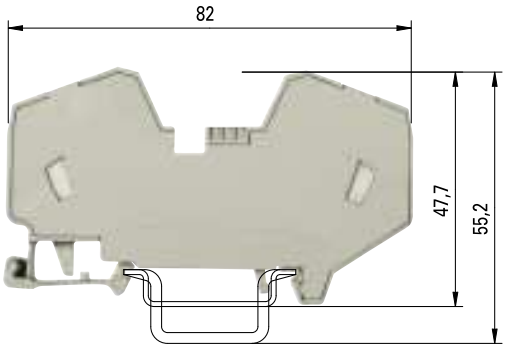

WKFN 4 D2/2/35

fine-stranded	solid	V	A
0.13–4 mm²	0.13–6 mm²	800 V/8 kV/3	32
No. 24-10 AWG		600 V	30
No. 24-10 AWG		600 V	32
0.13–4 mm²	0.2–6 mm²	550 V	28/25.5[2)]
6 mm			11 mm

VDE UL PTB

WKF 16/35 PV/WKFN

fine-stranded	solid/stranded	V	A
4–16 mm²	4–16 mm²	800 V/8 kV/3	76
No. 24-4 AWG		600 V	75
No. 12-4 AWG		600 V	78
4–16 mm²	4–16 mm²	690 V	64*
12 mm			15 mm


GL SEV NV UL SP ATEX


Type	Part No.	Std. Pack		Type	Part No.	Std. Pack
WKFN 4 D2/2/35	56.704.5155.0	100				
WKFN 4 D2/2/35 BLAU	56.704.5155.6	100				
				WKF 16/35 PV/WKFN	56.716.0353.0	20
35x27x7,5 EN 60715	98.300.0000.0	1		35x27x7,5 EN 60715	98.300.0000.0	1
35x24x15 EN 60715	98.360.0000.0	1		35x24x15 EN 60715	98.360.0000.0	1
9708/2 S35	Z5.522.8553.0	100		9708/2 S35	Z5.522.8553.0	100
WEF 1/35	Z5.523.9353.0	100		WEF 1/35	Z5.523.9353.0	100
APFN 4 D2/2	07.312.9055.0	10				
APFN 4 D2/2 BLAU	07.312.9055.6	10				
TWFN 4 D2/2	07.312.9155.0	10				
TWFN 4 D2/2 BLAU	07.312.9155.6	10				
IVB WKF 4–2	Z7.261.1227.0	10		IVB WKF 4–2	Z7.261.1227.0	10
IVB WKF 4–3	Z7.261.1327.0	10		IVB WKF 4–3	Z7.261.1327.0	10
IVB WKF 4–4	Z7.261.1427.0	10		IVB WKF 4–4	Z7.261.1427.0	10
IVB WKF 4–5	Z7.261.1527.0	10		IVB WKF 4–5	Z7.261.1527.0	10
IVB WKF 4–6	Z7.261.1627.0	10		IVB WKF 4–6	Z7.261.1627.0	10
IVB WKF 4–7	Z7.261.1727.0	20		IVB WKF 4–7	Z7.261.1727.0	20
IVB WKF 4–8	Z7.261.1827.0	20		IVB WKF 4–8	Z7.261.1827.0	20
IVB WKF 4–9	Z7.261.1927.0	20		IVB WKF 4–9	Z7.261.1927.0	20
IVB WKF 4–10	Z7.261.2027.0	20		IVB WKF 4–10	Z7.261.2027.0	20
LEL 4/1 WEISS	05.561.8553.0	100				
LEL 4/2 GRAU	05.561.8653.0	100				
LEL 4/3 SCHWARZ	05.561.8753.0	100				
ADF 4/4 GELB	04.343.6153.8	10		ADF 16/4 GELB	04.343.6653.8	10
PS WKC/F	Z1.299.9753.0	10				
ST 2/2,3	Z5.553.2921.0	10		ST 2/2,3	Z5.553.2921.0	10
DIN 5264 B 0,6x3,5	06.502.4000.0	5		DIN 5264 B 1,0x5,5	06.502.4200.0	5
DIN 5264 B 0,6x3,5 M	06.502.5000.0	10				

* Type-specific output currents upon request; KEMA 01 ATEX 2087 U[1)]

Duo ground blocks with tension spring connection

fasis



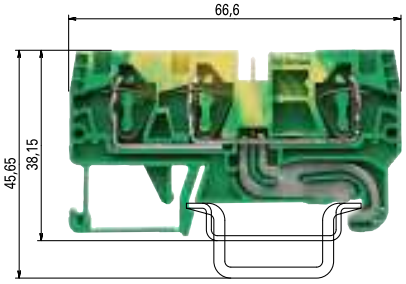

0344 ⟨Ex⟩ II 2GD IM2
Ex e I/II
EN 60 947-7-2:2002
UL ratings field/factory wiring
CSA ratings
PTB 05 ATEX 1104 U1) EN 60 079-0/EN 60 079-7
Width Wire strip length
Approvals

WKFN 4 SL/35

fine-stranded	solid	V	A
0.13–4 mm²	0.13–6 mm²	800 V/8 kV/3	2)
No. 24-10 AWG		600 V	
No. 24-10 AWG		600 V	
0.13–4 mm²	0.2–6 mm²		
6 mm		11 mm	

VDE PTB

WKFN 4 D1/2/SL/35


fine-stranded	solid	V	A
0.13–4 mm²	0.13–6 mm²	800 V/8 kV/3	2)
No. 24-10 AWG		600 V	
No. 24-10 AWG		600 V	
0.13–4 mm²	0.2–6 mm²		
6 mm		11 mm	

VDE PTB

		Type	Part No.	Std. Pack	Type	Part No.	Std. Pack
Ground block	green/yellow	WKFN 4 SL/35	56.704.9055.0	100	WKFN 4 D1/2/SL/35	56.704.9355.0	100
Accessories							
1. Mounting rail 35, 7.5 mm high	L = 2 m	35x27x7,5 EN 60715	98.300.0000.0	1	35x27x7,5 EN 60715	98.300.0000.0	1
Mounting rail 35, 15 mm high	L = 2 m	35x24x15 EN 60715	98.360.0000.0	1	35x24x15 EN 60715	98.360.0000.0	1
2. End clamp TS 35, with screw	8 mm wide	9708/2 S35	Z5.522.8553.0	100	9708/2 S35	Z5.522.8553.0	100
End clamp TS 35, without screw	8 mm wide	WEF 1/35	Z5.523.9353.0	100	WEF 1/35	Z5.523.9353.0	100
3. End plate	gray						
	blue						
	green	APFN 4 GRÜN	07.312.9255.7	10	APFN 4 D1/2 GRÜN	07.312.9455.7	10
4. Partition plate	gray						
	blue						
5. Cross connector	2 pole						
insulated	3 pole						
	4 pole						
	5 pole						
	6 pole						
	7 pole						
	8 pole						
	9 pole						
	10 pole						
6. Vertical cross connector, insulated	1 pole						
7. Wire entry guide	0,13–0,2 mm²	LEL 4/1 WEISS	05.561.8553.0	100	LEL 4/1 WEISS	05.561.8553.0	100
	0,25–0,5 mm²	LEL 4/2 GRAU	05.561.8653.0	100	LEL 4/2 GRAU	05.561.8653.0	100
	0,75–1,0 mm²	LEL 4/3 SCHWARZ	05.561.8753.0	100	LEL 4/3 SCHWARZ	05.561.8753.0	100
8. Cover with warning symbol over 4 blocks		ADF 4/4 GELB	04.343.6153.8	10	ADF 4/4 GELB	04.343.6153.8	10
9. Marking tag carrier, 2-fold							
10. Test adapter, modular							
11. Test plug		ST 2/2,3	Z5.553.2921.0	10	ST 2/2,3	Z5.553.2921.0	10
12. Screwdriver, uninsulated		DIN 5264 B 0,6x3,5	06.502.4000.0	5	DIN 5264 B 0,6x3,5	06.502.4000.0	5
Screwdriver, uninsulated, MINI		DIN 5264 B 0,6x3,5 M	06.502.5000.0	10	DIN 5264 B 0,6x3,5 M	06.502.5000.0	10
Marking accessories see page 76–79							

[1] Follow the Ex installation instructions on the cover page. [2] For the current-carrying capabilities of the mounting rails see AT catalog section ***facts*** & DATA.

Subject to change without further notice

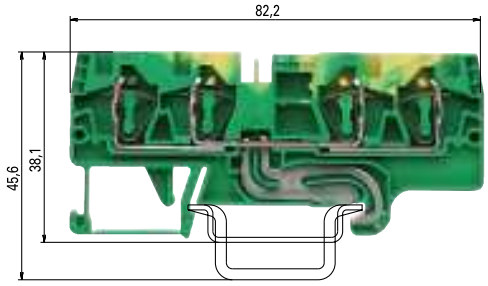


WKFN 4 D2/2/SL/35


fine-stranded	solid	V	A
0.13–4 mm²	0.13–6 mm²	800 V/8 kV/3	2)
No. 24-10 AWG		600 V	
No. 24-10 AWG		600 V	
0.13–4 mm²	0.2–6 mm²		
6 mm			11 mm

Type	Part No.	Std. Pack
WKFN 4 D2/2/SL/35	56.704.9155.0	100
35x27x7,5 EN 60715	98.300.0000.0	1
35x24x15 EN 60715	98.360.0000.0	1
9708/2 S35	Z5.522.8553.0	100
WEF 1/35	Z5.523.9353.0	100
APFN 4 D2/2 GRÜN	07.312.9055.7	10
LEL 4/1 WEISS	05.561.8553.0	100
LEL 4/2 GRAU	05.561.8653.0	100
LEL 4/3 SCHWARZ	05.561.8753.0	100
ADF 4/4 GELB	04.343.6153.8	10
PS WKC/F	Z1.299.9753.0	10
ST 2/2,3	Z5.553.2921.0	10
DIN 5264 B 0,6x3,5	06.502.4000.0	5
DIN 5264 B 0,6x3,5 M	06.502.5000.0	10

Duo feed-through blocks with tension spring connection

fasis



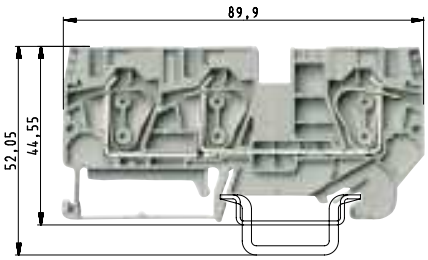

0344 Ⓔx II 2GD IM2
Ex e I/II
EN 60 947-7-1:2002
UL ratings field/factory wiring
CSA ratings
PTB 06 ATEX 1075 U[1] EN 60 079-0/EN 60 079-7
Width Wire strip length
Approvals

WKFN 6/35

fine-stranded	solid	V	A
0.2–6 mm²	1.5–10 mm²	800 V/8 kV/3	41
No. 24-8 AWG		600 V	50
No. 24-8 AWG		600 V	41
0.2–6 mm²	1.5–10 mm²	550 V	39/34*
8 mm			12 mm

WKFN 6 D1/2/35

fine-stranded	solid	V	A
0.2–6 mm²	1.5–10 mm²	800 V/8 kV/3	41
No. 24-8 AWG		600 V	50
No. 24-8 AWG		600 V	41
0.2–6 mm²	1.5–10 mm²	550 V	39/34*
8 mm			12 mm


		Type	Part No.	Std. Pack	Type	Part No.	Std. Pack
Feed-through block	gray	WKFN 6/35	56.706.0055.0	100	WKFN 6 D1/2/35	56.706.5055.0	100
Feed-through block	blue	WKFN 6/35 BLAU	56.706.0055.6	100	WKFN 6 D1/2/35 BLAU	56.706.5055.6	100
Ground block	green/yellow						
Accessories							
1. Mounting rail 35, 7.5 mm high	L = 2 m	35x27x7,5 EN 60715	98.300.0000.0	1	35x27x7,5 EN 60715	98.300.0000.0	1
Mounting rail 35, 15 mm high	L = 2 m	35x24x15 EN 60715	98.360.0000.0	1	35x24x15 EN 60715	98.360.0000.0	1
2. End clamp TS 35, with screw	8 mm wide	9708/2 S35	Z5.522.8553.0	100	9708/2 S35	Z5.522.8553.0	100
End clamp TS 35, without screw	8 mm wide	WEF 1/35	Z5.523.9353.0	100	WEF 1/35	Z5.523.9353.0	100
3. End plate	gray	APFN 6	07.313.0455.0	10	APFN 6 D1/2	07.313.0655.0	10
	blue	APFN 6 BLAU	07.313.0455.6	10	APFN 6 D1/2 BLAU	07.313.0655.6	10
	green						
4. Partition plate	gray	TWFN 6	07.313.0555.0	10	TWFN 6 D1/2	07.313.0755.0	10
	blue	TWFN 6 BLAU	07.313.0555.6	10	TWFN 6 D1/2 BLAU	07.313.0755.6	10
5. Cross connector	2 pole	IVB WKFN 6–2	Z7.282.5227.0	10	IVB WKFN 6–2	Z7.282.5227.0	10
insulated	3 pole	IVB WKFN 6–3	Z7.282.5327.0	10	IVB WKFN 6–3	Z7.282.5327.0	10
	4 pole	IVB WKFN 6–4	Z7.282.5427.0	10	IVB WKFN 6–4	Z7.282.5427.0	10
	5 pole	IVB WKFN 6–5	Z7.282.5527.0	10	IVB WKFN 6–5	Z7.282.5527.0	10
	6 pole						
	7 pole						
	8 pole						
	9 pole						
	10 pole						
6. Reducing jumper, WKF 35 to WKFN 10							
Reducing jumper, WKF 35 to WKFN 16							
Reducing jumper, WKFN 16 to WKFN 10							
7. Cover with warning symbol for 4 terminals		ADF 6/4 GELB	04.343.6253.8	10	ADF 6/4 GELB	04.343.6253.8	10
8. Test adapter modular							
9. Test plug		ST 2/2,3	Z5.553.2921.0	10	ST 2/2,3	Z5.553.2921.0	10
10. Screwdriver, uninsulated		DIN 5264 B 0,8x4	06.502.4100.0	5	DIN 5264 B 0,8x4	06.502.4100.0	5
Marking accessories see page 76–79							


[1] Follow the Ex installation instructions on the cover page
* solid/fine-stranded

[2] For the current-carrying capabilities of the mounting rails see AT catalog section ***facts*** & DATA.
** When cross connectors are used according to EN 60079-0 and EN 60079-7, the current must be reduced to max. 3.5 A.

Subject to change without further notice

Duo ground blocks with tension spring connection



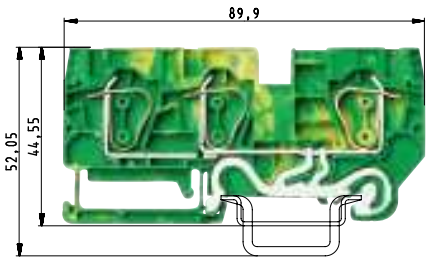

WKFN 6 SL/35

fine-stranded	solid	V	A
0.2–6 mm²	1.5–10 mm²	800 V/8 kV/3	
No. 24-8 AWG		600 V	
No. 24-8 AWG		600 V	
0.2–6 mm²	1.5–10 mm²		
8 mm			12 mm


WKFN 6 D1/2/SL/35


fine-stranded	solid	V	A
0.2–6 mm²	1.5–10 mm²	800 V/8 kV/3	
No. 24-8 AWG		600 V	50
No. 24-8 AWG		600 V	
0.2–6 mm²	1.5–10 mm²		
8 mm			12 mm

Type	Part No.	Std. Pack	Type	Part No.	Std. Pack
WKFN 6 SL/35	56.706.9055.0	100	WKFN 6 D1/2/SL/35	56.706.9355.0	100
35x27x7,5 EN 60715	98.300.0000.0	1	35x27x7,5 EN 60715	98.300.0000.0	1
35x24x15 EN 60715	98.360.0000.0	1	35x24x15 EN 60715	98.360.0000.0	1
9708/2 S35	Z5.522.8553.0	100	9708/2 S35	Z5.522.8553.0	100
WEF 1/35	Z5.523.9353.0	100	WEF 1/35	Z5.523.9353.0	100
APFN 6 GRÜN	07.313.0455.7	10	APFN 6 D1/2 GRÜN	07.313.0655.7	10
IVB WKFN 6–2	Z7.282.5227.0	10	IVB WKFN 6–2	Z7.282.5227.0	10
IVB WKFN 6–3	Z7.282.5327.0	10	IVB WKFN 6–3	Z7.282.5327.0	10
IVB WKFN 6–4	Z7.282.5427.0	10	IVB WKFN 6–4	Z7.282.5427.0	10
IVB WKFN 6–5	Z7.282.5527.0	10	IVB WKFN 6–5	Z7.282.5527.0	10
ADF 6/4 GELB	04.343.6253.8	10	ADF 6/4 GELB	04.343.6253.8	10
ST 2/2,3	Z5.553.2921.0	10	ST 2/2,3	Z5.553.2921.0	10
DIN 5264 B 0,8x4	06.502.4100.0	5	DIN 5264 B 0,8x4	06.502.4100.0	5

Duo feed-through blocks with tension spring connection

fasis

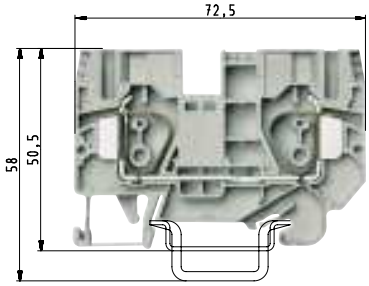

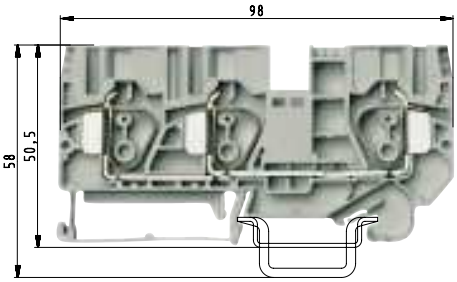

0344 ⟨Ex⟩ II 2GD IM2	
Ex e I/II	
EN 60 947-7-1:2002	
UL ratings	field/factory wiring
CSA ratings	
PTB 06 ATEX 1075 U[1]	EN 60 079-0/EN 60 079-7
Width	Wire strip length
Approvals	

WKFN 10/35

fine-stranded	solid/stranded	V	A
0.2–10 mm²	1.5–16 mm²	800 V/8 kV/3	57
No. 16-6 AWG		600 V	60
No. 16-6 AWG		600 V	65
0.2–10 mm²	1.5–16 mm²	550 V	52/47*
10 mm			15 mm

WKFN 10 D1/2/35

fine-stranded	solid/stranded	V	A
0.2–10 mm²	1.5–16 mm²	800 V/8 kV/3	57
No. 16-6 AWG		600 V	60
No. 16-6 AWG		600 V	65
0.2–10 mm²	1.5–16 mm²	550 V	52/47*
10 mm			15 mm


		Type	Part No.	Std. Pack	Type	Part No.	Std. Pack
Feed-through block	gray	WKFN 10/35	56.710.0055.0	50	WKFN 10 D1/2/35	56.710.5055.0	50
Feed-through block	blue	WKFN 10/35 BLAU	56.710.0055.6	50	WKFN 10 D1/2/35 BLAU	56.710.5055.6	50
Ground block	green/yellow						
Accessories							
1. Mounting rail 35, 7.5 mm high	L = 2 m	35x27x7,5 EN 60715	98.300.0000.0	1	35x27x7,5 EN 60715	98.300.0000.0	1
Mounting rail 35, 15 mm high	L = 2 m	35x24x15 EN 60715	98.360.0000.0	1	35x24x15 EN 60715	98.360.0000.0	1
2. End clamp TS 35, with screw	8 mm wide	9708/2 S35	Z5.522.8553.0	100	9708/2 S35	Z5.522.8553.0	100
End clamp TS 35, without screw	8 mm wide	WEF 1/35	Z5.523.9353.0	100	WEF 1/35	Z5.523.9353.0	100
3. End plate	gray	APFN 10	07.313.0855.0	10	APFN 10 D1/2	07.313.1055.0	10
	blue	APFN 10 BLAU	07.313.0855.6	10	APFN 10 D1/2 BLAU	07.313.1055.6	10
	green						
4. Partition plate	gray	TWFN 10	07.313.0955.0	10	TWFN 10 D1/2	07.313.1155.0	10
	blue	TWFN 10 BLAU	07.313.0955.6	10	TWFN 10 D1/2 BLAU	07.313.1155.6	10
5. Cross connector	2 pole	IVB WKF 10–2	Z7.283.8227.0	10	IVB WKF 10–2	Z7.283.8227.0	10
insulated	3 pole						
	4 pole						
	5 pole						
	6 pole						
	7 pole						
	8 pole						
	9 pole						
	10 pole						
6. Reducing jumper, WKF 35 to WKFN 10		IVB WKFN 35R10	Z7.285.6427.0	10	IVB WKFN 35R10	Z7.285.6427.0	10
Reducing jumper, WKF 35 to WKFN 16							
Reducing jumper, WKFN 16 to WKFN 10		IVB WKFN 16R10	Z7.284.4327.0	10	IVB WKFN 16R10	Z7.284.4327.0	10
7. Cover with warning symbol for 4 terminals		ADF 10/4 GELB	04.343.6453.8	10	ADF 10/4 GELB	04.343.6453.8	10
8. Test adapter modular							
9. Test plug		ST 2/2,3	Z5.553.2921.0	10	ST 2/2,3	Z5.553.2921.0	10
10. Screwdriver, uninsulated		DIN 5264 B 1x5,5	06.502.4200.0	5	DIN 5264 B 1x5,5	06.502.4200.0	5
Marking accessories see page. 76–79							


[1] Follow the Ex installation instructions on the cover page
* solid/fine-stranded

[2] For the current-carrying capabilities of the mounting rails see AT catalog section ***facts*** & DATA.
** When cross connectors are used according to EN 60079-0 and EN 60079-7, the current must be reduced to max. 3.5 A.

Subject to change without further notice

Duo ground blocks with tension spring connection

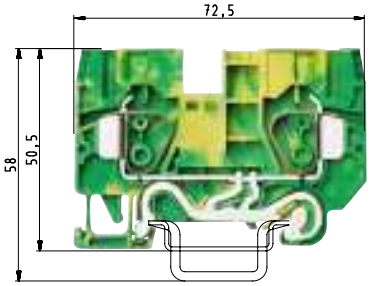

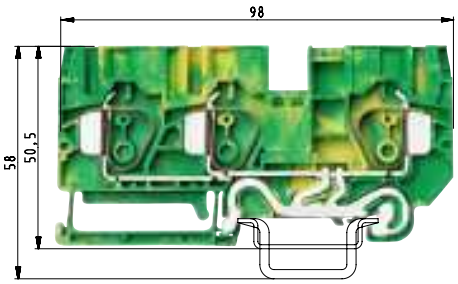

WKFN 10 SL/35

fine-stranded	solid/stranded	V	A
0.2–10 mm²	1.5–16 mm²	800 V/8 kV/3	2)
No. 16-6 AWG		600 V	
No. 16-6 AWG		600 V	
0.2–10 mm²	1.5–16 mm²		
10 mm			15 mm

VDE UL CSA PTB

WKFN 10 D1/2/SL/35


fine-stranded	solid/stranded	V	A
0.2–10 mm²	1.5–16 mm²	800 V/8 kV/3	2)
No. 16-6 AWG		600 V	
0.2–10 mm²	1.5–16 mm²		
10 mm			15 mm


VDE UL CSA PTB

Type	Part No.	Std. Pack	Type	Part No.	Std. Pack
WKFN 10 SL/35	56.710.9055.0	50	WKFN 10 D1/2/SL/35	56.710.9355.0	50
35x27x7,5 EN 60715	98.300.0000.0	1	35x27x7,5 EN 60715	98.300.0000.0	1
35x24x15 EN 60715	98.360.0000.0	1	35x24x15 EN 60715	98.360.0000.0	1
9708/2 S35	Z5.522.8553.0	100	9708/2 S35	Z5.522.8553.0	100
WEF 1/35	Z5.523.9353.0	100	WEF 1/35	Z5.523.9353.0	100
APFN 10 GRÜN	07.313.0855.7	10	APFN 10 D1/2 GRÜN	07.313.1055.7	10
IVB WKF 10–2	Z7.283.8227.0	10	IVB WKF 10–2	Z7.283.8227.0	10
ADF 10/4 GELB	04.343.6453.8	10	ADF 10/4 GELB	04.343.6453.8	10
ST 2/2,3	Z5.553.2921.0	10	ST 2/2,3	Z5.553.2921.0	10
DIN 5264 B 1x5,5	06.502.4200.0	5	DIN 5264 B 1x5,5	06.502.4200.0	5

Duo feed-through blocks with tension spring connection

fasis

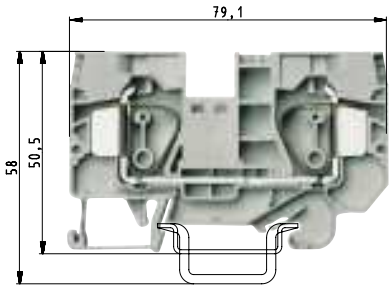

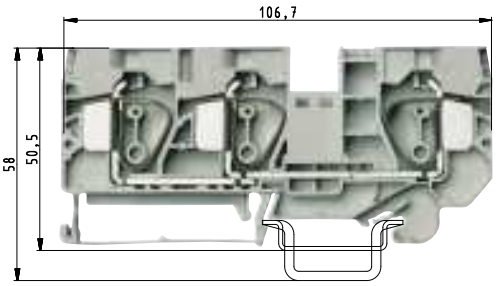

0344 Ⓔx II 2GD IM2
Ex e I/II
EN 60 947-7-1:2002
UL ratings field/factory wiring
CSA ratings
PTB 06 ATEX 1075 U[1] EN 60 079-0/EN 60 079-7
Width Wire strip length
Approvals

WKFN 16/35

fine-stranded	solid/stranded	V	A
0.2–16 mm²	1.5–25 mm²	800 V/8 kV/3	76
No. 16-4 AWG		600 V	85
No. 16-4 AWG		600 V	85
0.2–16 mm²	1.5–25 mm²	550 V	74/68*
12 mm			16 mm

WKFN 16 D1/2/35

fine-stranded	solid/stranded	V	A
0.2–16 mm²	1.5–25 mm²	800 V/8 kV/3	76
No. 16-4 AWG		600 V	85
No. 16-4 AWG		600 V	85
0.2–16 mm²	1.5–25 mm²	550 V	74/68*
12 mm			16 mm


		Type	Part No.	Std. Pack	Type	Part No.	Std. Pack
Feed-through block	gray	WKFN 16/35	56.716.0055.0	50	WKFN 16 D1/2/35	56.716.5055.0	50
Feed-through block	blue	WKFN 16/35 BLAU	56.716.0055.6	50	WKFN 16 D1/2/35 BLAU	56.716.5055.6	50
Ground block	green/yellow						
Accessories							
1. Mounting rail 35, 7.5 mm high	L = 2 m	35x27x7,5 EN 60715	98.300.0000.0	1	35x27x7,5 EN 60715	98.300.0000.0	1
Mounting rail 35, 15 mm high	L = 2 m	35x24x15 EN 60715	98.360.0000.0	1	35x24x15 EN 60715	98.360.0000.0	1
2. End clamp TS 35, with screw	8 mm wide	9708/2 S35	Z5.522.8553.0	100	9708/2 S35	Z5.522.8553.0	100
End clamp TS 35, without screw	8 mm wide	WEF 1/35	Z5.523.9353.0	100	WEF 1/35	Z5.523.9353.0	100
3. End plate	gray	APFN 16	07.313.1255.0	10	APFN 16 D1/2	07.313.1455.0	10
	blue	APFN 16 BLAU	07.313.1255.6	10	APFN 16 D1/2 BLAU	07.313.1455.6	10
	green						
4. Partition plate	gray	TWFN 16	07.313.1355.0	10	TWFN 16 D1/2	07.313.1555.0	10
	blue	TWFN 16 BLAU	07.313.1355.6	10	TWFN 16 D1/2 BLAU	07.313.1555.6	10
5. Cross connector**	2 pole	IVB WKF 16–2	Z7.284.4227.0	10	IVB WKF 16–2	Z7.284.4227.0	10
insulated	3 pole						
	4 pole						
	5 pole						
	6 pole						
	7 pole						
	8 pole						
	9 pole						
	10 pole						
6. Reducing jumper, WKF 35 to WKFN 10							
Reducing jumper, WKF 35 to WKFN 16		IVB WKFN 35R16	Z7.285.6527.0	10	IVB WKFN 35R16	Z7.285.6527.0	10
Reducing jumper, WKFN 16 to WKFN 10		IVB WKFN 16R10	Z7.284.4327.0	10	IVB WKFN 16R10	Z7.284.4327.0	10
7. Cover with warning symbol for 4 terminals		ADF 16/4 GELB	04.343.6653.8	10	ADF 16/4 GELB	04.343.6653.8	10
8. Test adapter modular							
9. Test plug		ST 2/2,3	Z5.553.2921.0	10	ST 2/2,3	Z5.553.2921.0	10
10. Screwdriver, uninsulated		DIN 5264 B 1x5,5	06.502.4200.0	5	DIN 5264 B 1x5,5	06.502.4200.0	5
Marking accessories see page 76–79							


[1] Follow the Ex installation instructions on the cover page
* solid/fine-stranded

[2] For the current-carrying capabilities of the mounting rails see AT catalog section ***facts*** & DATA.
** When cross connectors are used according to EN 60079-0 and EN 60079-7, the current must be reduced to max. 3.5 A.

Subject to change without further notice

Duo ground blocks with tension spring connection

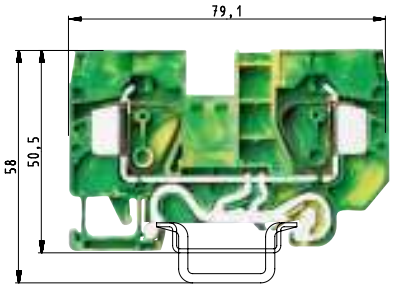

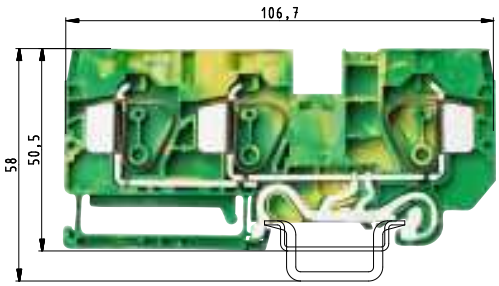

WKFN 16 SL/35

fine-stranded	solid/stranded	V	A
0.2–16 mm²	1.5–25 mm²	800 V/8 kV/3	2)
No. 16-4 AWG		600 V	
No. 16-4 AWG		600 V	
0.2–16 mm²	1.5–25 mm²		
12 mm			16 mm

WKFN 16 D1/2/SL/35


fine-stranded	solid/stranded	V	A
0.2–16 mm²	1.5–25 mm²	800 V/8 kV/3	2)
No. 16-4 AWG		600 V	
0.2–16 mm²	1.5–25 mm²		
12 mm			16 mm


Type	Part No.	Std. Pack
WKFN 16 SL/35	56.716.9055.0	50
35x27x7,5 EN 60715	98.300.0000.0	1
35x24x15 EN 60715	98.360.0000.0	1
9708/2 S35	Z5.522.8553.0	100
WEF 1/35	Z5.523.9353.0	100
APFN 16 GRÜN	07.313.1255.7	10
IVB WKF 16–2	Z7.284.4227.0	10
ADF 16/4 GELB	04.343.6653.8	10
ST 2/2,3	Z5.553.2921.0	10
DIN 5264 B 1x5,5	06.502.4200.0	5

Type	Part No.	Std. Pack
WKFN 16 D1/2/SL/35	56.716.9355.0	50
35x27x7,5 EN 60715	98.300.0000.0	1
35x24x15 EN 60715	98.360.0000.0	1
9708/2 S35	Z5.522.8553.0	100
WEF 1/35	Z5.523.9353.0	100
APFN 16 D1/2 GRÜN	07.313.1455.7	10
IVB WKF 16–2	Z7.284.4227.0	10
ADF 16/4 GELB	04.343.6653.8	10
ST 2/2,3	Z5.553.2921.0	10
DIN 5264 B 1x5,5	06.502.4200.0	5

Duo feed-through block/ground block with tension spring connection

fasis

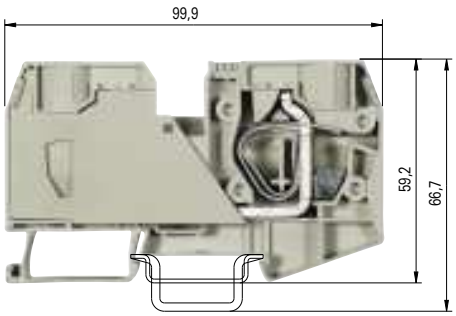

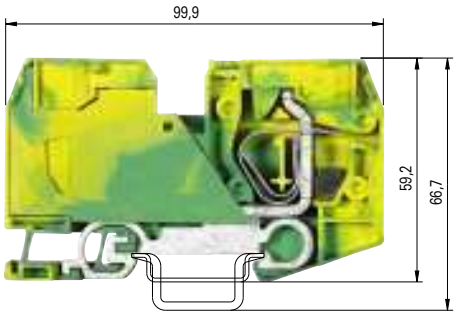

0344 ⟨Ex⟩ II 2GD
Ex e II
EN 60 947-7-1:2002
UL ratings field/factory wiring
CSA ratings
KEMA 03 ATEX 2057 U[1] EN 60 079-0/EN 60 079-7
Width Wire strip length
Approvals

WKF 35/35

fine-stranded	solid/stranded	V	A
2.5–35 mm²	2.5–35 mm²	800 V/8 kV/3	125
No. 12-2 AWG		600 V	120
No. 12-2 AWG		600 V	120
2.5–35 mm²	2.5–35 mm²	690 V	92/108 [5]
16 mm			18 mm

ATEX cULus CSA

WKF 35 SL/35

fine-stranded	solid/stranded	V	A
2.5–35 mm²	2.5–35 mm²	800 V/8 kV/3[4]	[3]
No. 12-2 AWG		600 V	
No. 12-2 AWG		600 V	
2.5–35 mm²	2.5–35 mm²		
16 mm			18 mm

ATEX cULus CSA


		Type	Part No.	Std. Pack	Type	Part No.	Std. Pack
Feed-through block	gray	WKF 35/35	56.735.0053.0	10			
Feed-through block	blue	WKF 35/35 BLAU	56.735.0053.6	10			
Ground block	green/yellow				WKF 35 SL/35	56.735.9053.0	10
Accessories							
1. Mounting rail 35, 7.5 mm high	L = 2 m	35x27x7,5 EN 60715	98.300.0000.0	1	35x27x7,5 EN 60715	98.300.0000.0	1
Mounting rail 35, 15 mm high	L = 2 m	35x24x15 EN 60715	98.360.0000.0	1	35x24x15 EN 60715	98.360.0000.0	1
2. End clamp TS 35, with screw[2]	8 mm wide	9708/2 S35	Z5.522.8553.0	100	9708/2 S35	Z5.522.8553.0	100
End clamp TS 35, without screw	8 mm wide						
3. End plate	gray						
	blue						
	green						
4. Partition plate	gray						
	blue						
5. Cross connector	2 pole	IVB WKF 35–2	Z7.285.6227.0	10	IVB WKF 35–2	Z7.285.6227.0	10
insulated	3 pole						
	4 pole						
	5 pole						
	6 pole						
	7 pole						
	8 pole						
	9 pole						
	10 pole						
6. Reducing jumper, WKF 35 to WKFN 10		IVB WKFN 35R10	Z7.285.6427.0	10			
Reducing jumper, WKF 35 to WKFN 16		IVB WKFN 35R16	Z7.285.6527.0	10			
Reducing jumper, WKFN 16 to WKFN 10		IVB WKFN 16R10	Z7.284.4327.0	10			
7. Cover with warning symbol for 4 terminals		ADF 35/5 GELB	04.343.9253.8	10	ADF 35/5 GELB	04.343.9253.8	10
8. Test adapter modular							
9. Test plug		ST 2/2,3	Z5.553.2921.0	10	ST 2/2,3	Z5.553.2921.0	10
10. Screwdriver, uninsulated		DIN 5264 B 1x5,5	06.502.4200.0	5	DIN 5264 B 1x5,5	06.502.4200.0	5
Marking accessories see page 76–79							

[1] Follow the Ex installation instructions on the cover page [2] Do not use in Ex environments.
[3] For the current-carrying capabilities of the mounting rails see AT catalog section ***facts*** & DATA. [4] Ratings to adjacent feed-through blocks of the same series and size [5] with/without jumper

Subject to change without further notice

Potential supply with feed-through blocks up to 35 mm²

$I_{max\ E}$: $I_{max.\ supply}$
$I_{max\ R}$: $I_{reducing\ cross\ connector}$
$I_{N\text{-}A}$: $I_{N\ output\ terminal\ block}$

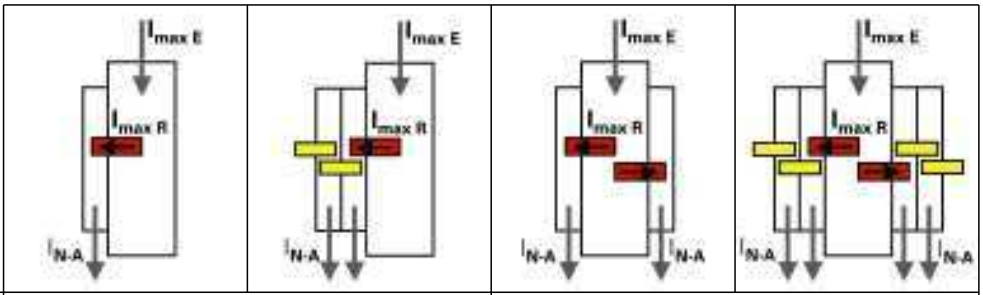



Potential distribution		Distribution on one side		Distribution on both sides	
		2 poles	several poles	2 poles	several poles
35-R-10	$I_{max.\ supply}$	125 A	125 A	125 A	125 A
	$I_{max.\ reducing\ cross\ connector}$	57 A	105 A	57 A	105 A
	$I_{N\ output\ terminal\ block}$	57 A	57 A	57 A	57 A
35-R-16	$I_{max.\ supply}$	125 A	125 A	125 A	125 A
	$I_{max.\ reducing\ cross\ connector}$	76 A	105 A	76 A	105 A
	$I_{N\ output\ terminal\ block}$	76 A	76 A	76 A	76 A
16-R-10	$I_{max.\ supply}$	76 A	76 A	–	–
	$I_{max.\ reducing\ cross\ connector}$	57 A	76 A	–	–
	$I_{N\ output\ terminal\ block}$	57 A	57 A	–	–

	Type	Part No.	Std. Pack	Type	Part No.	Std. Pack
Potential distribution 35 R 10	Supply block			WKF 35 /35	56.735.0035.0	10
	Supply block			WKF 35 /35 BLAU	56.735.0035.6	10
Potential supply 35 mm²	Reducing cross connector			IVB WKFN 35R10	Z7.285.6427.0	10
Reducing cross connector 35R10						
Potential output 10 mm²	Output block			WKFN 10 /35	56.710.0055.0	10
	Output block			WKFN 10 /35 BLAU	56.710.0055.6	10
	Output block			WKFN 10 D1/2/35	56.710.5055.0	10
	Output block			WKFN 10 D1/2/35 BLAU	56.710.5055.6	10
Potential distribution 35 R 16	Supply block			WKF 35 /35	56.735.0035.0	10
	Supply block			WKF 35 /35 BLAU	56.735.0035.6	10
Potential supply 35 mm²	Reducing cross connector			IVB WKFN 35R16	Z7.285.6527.0	10
Reducing cross connector 35R16						
Potential output 16 mm²	Output block			WKFN 16 /35	56.716.0055.0	10
	Output block			WKFN 16 /35 BLAU	56.716.0055.6	10
	Output block			WKFN 16 D1/2/35	56.716.5055.0	10
	Output block			WKFN 16 D1/2/35 BLAU	56.716.5055.6	10
Potential distribution 16 R 10	Supply block			WKFN 16 /35	56.716.0055.0	10
	Supply block			WKFN 16 /35 BLAU	56.716.0055.6	10
	Supply block			WKFN 16 D1/2/35	56.716.5055.0	10
Potential supply 16 mm²	Supply block			WKFN 16 D1/2/35 BLAU	56.716.5055.6	10
Reducing cross connector 16R10						
Potential output 10 mm²	Reducing cross connector			IVB WKFN 35R16	Z7.285.6527.0	10
	Output block			WKFN 16 /35	56.716.0055.0	10
	Output block			WKFN 16 /35 BLAU	56.716.0055.6	10
	Output block			WKFN 16 D1/2/35	56.716.5055.0	10
	Output block			WKFN 16 D1/2/35 BLAU	56.716.5055.6	10

Multi-tier terminal blocks with tension spring connection

fasis

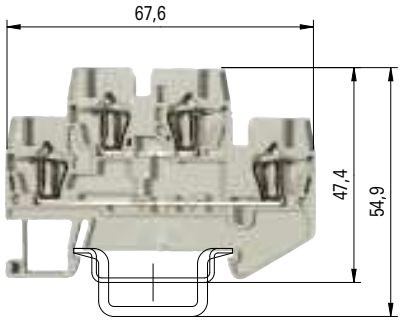

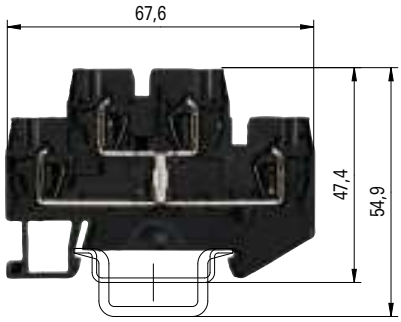

0344 ⟨Ex⟩ II 2GD
Ex e II
EN 60 947-7-1:2002
UL ratings field/factory wiring
CSA ratings
KEMA 03 ATEX 2056 U[1] EN 60 079-0/EN 60 079-7
Width Wire strip length
Approvals

WKF 1,5 E2/35

fine-stranded	solid	V	A
0.08–1,5 mm²	0.08–1.5 mm²	500 V/6 kV/3	17,5
No. 26-14 AWG		300 V	15
No. 26-14 AWG		300 V	15
0.14–1,5 mm²	0.14–1.5 mm²	440 V*)	15/13,5[3]
4 mm			10 mm

ATEX cULus SP

WKF 1,5 E2/VB/35


fine-stranded	solid	V	A
0.08–1,5 mm²	0.08–1.5 mm²	500 V/6 kV/3	17,5
No. 26-14 AWG		300 V	15
No. 26-14 AWG		300 V	15
0.14–1.5 mm²	0.14–1.5 mm²	440 V*)	15/13,5[3]
4 mm			10 mm

ATEX cULus SP

		Type	Part No.	Std. Pack	Type	Part No.	Std. Pack
Multi-tier block	gray	WKF 1,5 E2/35	56.702.7653.0	50			
Multi-tier block, vertically connected	black				WKF 1,5 E2/VB/35	56.702.6953.1	50
Multi-tier block, combined	gray						
Multi-tier ground block	green/yellow						
Accessories							
1. Mounting rail 35, 7.5 mm high	L = 2 m	35x27x7,5 EN 60715	98.300.0000.0	1	35x27x7,5 EN 60715	98.300.0000.0	1
Mounting rail 35, 15 mm high	L = 2 m	35x24x15 EN 60715	98.360.0000.0	1	35x24x15 EN 60715	98.360.0000.0	1
2. End clamp TS 35, with screw[2]	8 mm wide	9708/2 S35	Z5.522.8553.0	100	9708/2 S35	Z5.522.8553.0	100
End clamp TS 35, without screw	8 mm wide	WEF 1/35	Z5.523.9353.0	100	WEF 1/35	Z5.523.9353.0	100
3. End plate	gray	APF 1,5 E2	07.312.8753.0	10	APF 1,5 E2	07.312.8753.0	10
	blue						
Segment end plate	gray						
4. Partition plate	gray	TWF 1,5 E2	07.312.8853.0	10	TWF 1,5 E2	07.312.8853.0	10
	blue						
5. Cross connector	2 pole	IVB WKF 1,5–2	Z7.268.0227.0	10	IVB WKF 1,5–2	Z7.268.0227.0	10
insulated	3 pole	IVB WKF 1,5–3	Z7.268.0327.0	10	IVB WKF 1,5–3	Z7.268.0327.0	10
	4 pole	IVB WKF 1,5–4	Z7.268.0427.0	10	IVB WKF 1,5–4	Z7.268.0427.0	10
	5 pole	IVB WKF 1,5–5	Z7.268.0527.0	10	IVB WKF 1,5–5	Z7.268.0527.0	10
	10 pole	IVB WKF 1,5–10	Z7.268.1027.0	10	IVB WKF 1,5–10	Z7.268.1027.0	10
	20 pole	IVB WKF 1,5–20	Z7.268.2027.0	10	IVB WKF 1,5–20	Z7.268.2027.0	10
6. Wire entry guide	0.13–0.2 mm²	LEL 1,5/1 WEISS	05.564.4253.0	10	LEL 1,5/1 WEISS	05.564.4253.0	10
	0.25–0.5 mm²	LEL 1,5/2 GRAU	05.564.4353.0	10	LEL 1,5/2 GRAU	05.564.4353.0	10
	0.75–1.0 mm²						
7. Cover with warning symbol over 5 blocks		ADF 1,5/5 GELB	04.343.6953.8	10	ADF 1,5/5 GELB	04.343.6953.8	10
8. Marking tag carrier, 2-fold		BT 4/2	04.243.0953.0	100	BT 4/2	04.243.0953.0	100
9. Test adapter, modular							
10. Test plug							
11. Screwdriver, uninsulated		DIN 5264 B 0,4x2,5	06.502.4300.0	5	DIN 5264 B 0,4x2,5	06.502.4300.0	5
Marking accessories see page 76–79							

*) For maintaining the proper isolation distances, the open side of a feed-through terminal block as well as both sides of a jumper are to be covered by partitions.
[1] Follow the Ex installation instructions on the cover page
[2] Do not use in Ex environments.
[3] Rated current when using cross connectors

Subject to change without further notice

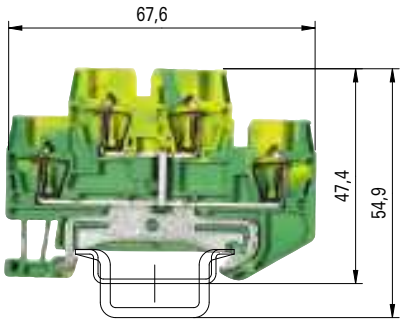

WKF 1,5 E2/SL/35


fine-stranded	solid	V	A
0.08–1.5 mm²	0.08–1.5 mm²	500 V/6 kV/3	
No. 26-14 AWG		300 V	
No. 26-14 AWG		300 V	
0.14–1.5 mm²	0.14–1.5 mm²	*)	
4 mm			10 mm


ATEX

Type	Part No.	Std. Pack
WKF 1,5 E2/SL/35	56.702.9253.0	50
35x27x7,5 EN 60715	98.300.0000.0	1
35x24x15 EN 60715	98.360.0000.0	1
9708/2 S35	Z5.522.8553.0	100
WEF 1/35	Z5.523.9353.0	100
APF 1,5 E2	07.312.8753.0	10
TWF 1,5 E2	07.312.8853.0	10
IVB WKF 1,5–2	Z7.268.0227.0	10
IVB WKF 1,5–3	Z7.268.0327.0	10
IVB WKF 1,5–4	Z7.268.0427.0	10
IVB WKF 1,5–5	Z7.268.0527.0	10
IVB WKF 1,5–10	Z7.268.1027.0	10
IVB WKF 1,5–20	Z7.268.2027.0	10
LEL 1,5/1 WEISS	05.564.4253.0	10
LEL 1,5/2 GRAU	05.564.4353.0	10
ADF 1,5/5 GELB	04.343.6953.8	10
BT 4/2	04.243.0953.0	100
DIN 5264 B 0,4x2,5	06.502.4300.0	5

Multi-tier terminal blocks with tension spring connection

fasis

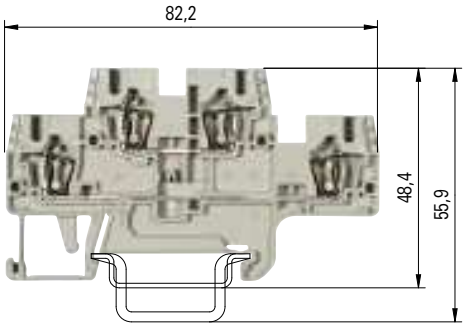

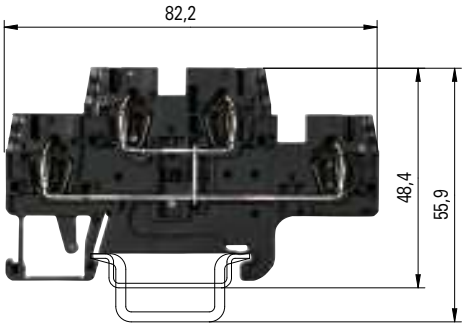

0344 Ⓔx II 2GD IM2
Ex e I/II
EN 60 947-7-1:2002
UL ratings field/factory wiring
CSA ratings
PTB 04 ATEX 1051 U[1] EN 60 079-0/EN 60 079-7
Width Wire strip length
Approvals

WKFN 2,5 E/35
WKFN 2,5 E/N/D/35

fine-stranded	solid	V	A
0.13–2.5 mm²	0.13–4 mm²	500 V/6 kV/3	24
No. 22-12 AWG		300 V	20
No. 24-12 AWG		300 V	24
0.2–2.5 mm²	0.13–4 mm²	440/275*	20/19[2]
5 mm			11 mm

PTB VDE UL UL AEx CSA CSA Ex

WKFN 2,5 E/VB/35

fine-stranded	solid	V	A
0.13–2.5 mm²	0.13–4 mm²	500 V/6 kV/3	24
No. 22-12 AWG		600 V	20
No. 24-12 AWG		600 V	24
0.2–2.5 mm²	0.13–4 mm²	440	20/19[2]
5 mm			11 mm


PTB VDE UL CSA CSA Ex


		Type	Part No.	Std. Pack	Type	Part No.	Std. Pack
Multi-tier block	gray	WKFN 2,5 E/35	56.703.7055.0	100			
Multi-tier block, vertically connected	black				WKFN 2,5 E/VB/35	56.703.6955.1	100
Multi-tier block, combined	gray	WKFN 2,5 E/N/D/35	56.703.7655.0	100			
Multi-tier block, combined	gray						
Multi-tier ground block	green/yellow						
Accessories							
1. Mounting rail 35, 7.5 mm high	L = 2 m	35x27x7,5 EN 60715	98.300.0000.0	1	35x27x7,5 EN 60715	98.300.0000.0	1
Mounting rail 35, 15 mm high	L = 2 m	35x24x15 EN 60715	98.360.0000.0	1	35x24x15 EN 60715	98.360.0000.0	1
2. End clamp TS 35, with screw	8 mm wide	9708/2 S35	Z5.522.8553.0	100	9708/2 S35	Z5.522.8553.0	100
End clamp TS 35, without screw	8 mm wide	WEF 1/35	Z5.523.9353.0	100	WEF 1/35	Z5.523.9353.0	100
3. End plate	gray	APFN 2,5 E	07.312.7355.0	10	APFN 2,5 E	07.312.7355.0	10
	blue						
	green						
4. Partition plate	gray	TWFN 2,5 E	07.312.7455.0	10	TWFN 2,5 E	07.312.7455.0	10
	blue						
5. Cross connector	2 pole	IVB WKF 2,5–2	Z7.280.6227.0	10	IVB WKF 2,5–2	Z7.280.6227.0	10
insulated	3 pole	IVB WKF 2,5–3	Z7.280.6327.0	10	IVB WKF 2,5–3	Z7.280.6327.0	10
	4 pole	IVB WKF 2,5–4	Z7.280.6427.0	10	IVB WKF 2,5–4	Z7.280.6427.0	10
	5 pole	IVB WKF 2,5–5	Z7.280.6527.0	10	IVB WKF 2,5–5	Z7.280.6527.0	10
	until 10 pole	IVB WKF 2,5–10	Z7.280.7027.0	20	IVB WKF 2,5–10	Z7.280.7027.0	20
Vertical cross connector	1 pole	IVB WKF–V	Z7.261.1127.0	10	IVB WKF–V	Z7.261.1127.0	10
6. Wire entry guide	0.13–0.2 mm²	LELN 2,5/1 WEISS	05.564.3755.0	100	LELN 2,5/1 WEISS	05.564.3755.0	100
	0.25–0.5 mm²	LELN 2,5/2 GRAU	05.564.3855.0	100	LELN 2,5/2 GRAU	05.564.3855.0	100
	0.75–1.0 mm²	LELN 2,5/3 SCHWARZ	05.564.3955.0	100	LELN 2,5/3 SCHWARZ	05.564.3955.0	100
7. Cover with warning symbol over 4 blocks		ADFN 2,5/4 GELB	04.343.8353.8	10	ADFN 2,5/4 GELB	04.343.8353.8	10
8. Marking tag carrier, 2-fold		BT 5/2	04.243.0855.0	100	BT 5/2	04.243.0855.0	100
9. Test adapter, modular		PS WKC/F	Z1.299.9753.0	10	PS WKC/F	Z1.299.9753.0	10
10. Test plug		ST 2/2,3	Z5.553.2921.0	10	ST 2/2,3	Z5.553.2921.0	10
11. Screwdriver, uninsulated		DIN 5264 B 0,6x3,5	06.502.4000.0	5	DIN 5264 B 0,6x3,5	06.502.4000.0	5
Screwdriver, uninsulated, MINI		DIN 5264 B 0,6x3,5 M	06.502.5000.0	10	DIN 5264 B 0,6x3,5 M	06.502.5000.0	10
Marking accessories see page 76–79							

[1] Follow the Ex installation instructions on the cover page
[2] solid/fine-stranded
* When using cross connectors on the upper tier

Subject to change without further notice

fasis

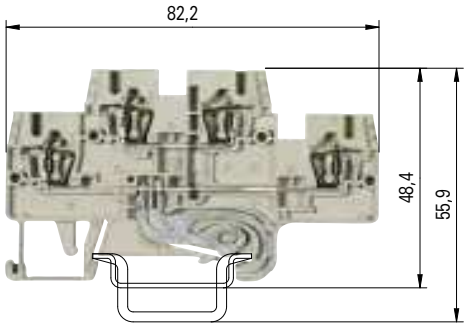

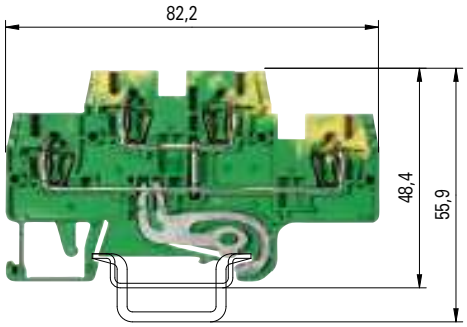

WKFN 2,5 E/D/SL/35
WKFN 2,5 E/N/SL/35

fine-stranded	solid	V	A
0.13–2.5 mm²	0.13–4 mm²	500 V/6 kV/3	24
No. 22-12 AWG		300 V	20
No. 24-12 AWG		300 V	24

5 mm 11 mm

WKFN 2,5 E/SL/35

fine-stranded	solid	V	A
0.13–2.5 mm²	0.13–4 mm²	500 V/6 kV/3	
No. 22-12 AWG		600 V	
No. 24-12 AWG		600 V	
0.2–2.5 mm²	0.13–4 mm²		

5 mm 11 mm

Type	Part No.	Std. Pack	Type	Part No.	Std. Pack
WKFN 2,5 E/D/SL/35	56.703.7855.0	100			
WKFN 2,5 E/N/SL/35	56.703.7755.0	100			
			WKFN 2,5 E/SL/35	56.703.8955.0	100
35x27x7,5 EN 60715	98.300.0000.0	1	35x27x7,5 EN 60715	98.300.0000.0	1
35x24x15 EN 60715	98.360.0000.0	1	35x24x15 EN 60715	98.360.0000.0	1
9708/2 S35	Z5.522.8553.0	100	9708/2 S35	Z5.522.8553.0	100
WEF 1/35	Z5.523.9353.0	100	WEF 1/35	Z5.523.9353.0	100
APFN 2,5 E	07.312.7355.0	10			
			APFN 2,5 E GRÜN	07.312.7355.7	10
TWFN 2,5 E	07.312.7455.0	10			
IVB WKF 2,5–2	Z7.280.6227.0	10			
IVB WKF 2,5–3	Z7.280.6327.0	10			
IVB WKF 2,5–4	Z7.280.6427.0	10			
IVB WKF 2,5–5	Z7.280.6527.0	10			
IVB WKF 2,5–10	Z7.280.7027.0	20			
IVB WKF–V	Z7.261.1127.0	10			
LELN 2,5/1 WEISS	05.564.3755.0	100	LELN 2,5/1 WEISS	05.564.3755.0	100
LELN 2,5/2 GRAU	05.564.3855.0	100	LELN 2,5/2 GRAU	05.564.3855.0	100
LELN 2,5/3 SCHWARZ	05.564.3955.0	100	LELN 2,5/3 SCHWARZ	05.564.3955.0	100
ADFN 2,5/4 GELB	04.343.8353.8	10	ADFN 2,5/4 GELB	04.343.8353.8	10
BT 5/2	04.243.0855.0	100	BT 5/2	04.243.0855.0	100
PS WKC/F	Z1.299.9753.0	10	PS WKC/F	Z1.299.9753.0	10
ST 2/2,3	Z5.553.2921.0	10	ST 2/2,3	Z5.553.2921.0	10
DIN 5264 B 0,6x3,5	06.502.4000.0	5	DIN 5264 B 0,6x3,5	06.502.4000.0	5
DIN 5264 B 0,6x3,5 M	06.502.5000.0	10	DIN 5264 B 0,6x3,5 M	06.502.5000.0	10

WKFN 2,5 E/35 Block color: gray

	Function	Color ID
Upper tier	Feed-through	gray
Lower tier	Feed-through	gray

WKFN 2,5 E/N/D/35 Block color: gray

	Function	Color ID
Upper tier	Feed-through	blue
Lower tier	Feed-through	gray

WKFN 2,5 E/VB/35 Block color: gray

	Function	Color ID
Upper tier	Feed-through	black
Lower tier	vertically jumpered	black

WKFN 2,5 E/D/SL/35 Block color: gray

	Function	Color ID
Upper tier	Feed-through	gray
Lower tier	Ground conductor	green/yellow

WKFN 2,5 E/N/SL/35 Block color: gray


	Function	Color ID
Upper tier	Feed-through	blue
Lower tier	Ground conductor	green/yellow


WKFN 2,5 E/SL/35 Block color: green/yellow

	Function	Color ID
Upper tier	Ground conductor	green/yellow
Lower tier	vertically jumpered	green/yellow

Duo multi-tier terminal blocks with tension spring connection

fasis

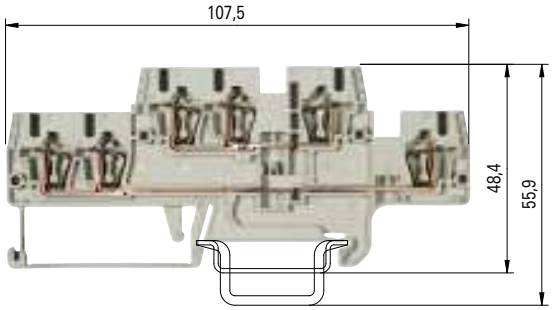

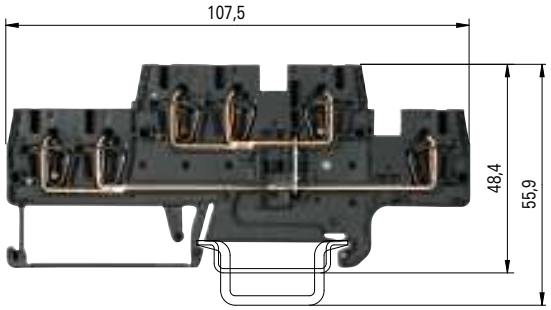

0344 Ⓔx II 2GD IM2
Ex e I/II
EN 60 947-7-1:2002
UL ratings field/factory wiring
CSA ratings
PTB 04 ATEX 1051 U[1] EN 60 079-0/EN 60 079-7
Width Wire strip length
Approvals

WKFN 2,5 E1/2/35
WKFN 2,5 E1/2/N/D/35

fine-stranded	solid	V	A
0.13–2.5 mm²	0.13–4 mm²	500 V/6 kV/3	22
No. 22-12 AWG		300 V	20
No. 24-12 AWG		300 V	24
0.2–2.5 mm²	0.13–4 mm²	440/275*	20/17,5[2]
5 mm			11 mm

PTB VDE UL CSA CSA Ex

WKFN 2,5 E1/2/VB/35

fine-stranded	solid	V	A
0.13–2.5 mm²	0.13–4 mm²	500 V/6 kV/3	22
No. 22-12 AWG		600 V	20
No. 24-12 AWG		600 V	24
0.2–2.5 mm²	0.13–4 mm²	440	20/17,5[2]
5 mm			11 mm


PTB VDE UL CSA CSA Ex


		Type	Part No.	Std. Pack	Type	Part No.	Std. Pack
Multi-tier block	gray	WKFN 2,5 E1/2/35	56.703.6055.0	50			
Multi-tier block, vertically connected	black				WKFN 2,5 E1/2/VB/35	56.703.5955.1	50
Multi-tier block, combined	gray	WKFN 2,5 E1/2/N/D/35	56.703.6355.0	50			
Multi-tier block, combined	gray						
Multi-tier ground block	green/yellow						
Accessories							
1. Mounting rail 35, 7.5 mm high	L = 2 m	35x27x7,5 EN 60715	98.300.0000.0	1	35x27x7,5 EN 60715	98.300.0000.0	1
Mounting rail 35, 15 mm high	L = 2 m	35x24x15 EN 60715	98.360.0000.0	1	35x24x15 EN 60715	98.360.0000.0	1
2. End clamp TS 35, with screw	8 mm wide	9708/2 S35	Z5.522.8553.0	100	9708/2 S35	Z5.522.8553.0	100
End clamp TS 35, without screw	8 mm wide	WEF 1/35	Z5.523.9353.0	100	WEF 1/35	Z5.523.9353.0	100
3. End plate	gray	APFN 2,5 E1/2	07.312.7755.0	10	APFN 2,5 E1/2	07.312.7755.0	10
	blue						
	green						
4. Partition plate	gray	TWFN 2,5 E1/2	07.312.7855.0	10	TWFN 2,5 E1/2	07.312.7855.0	10
	blue						
5. Cross connector	2 pole	IVB WKF 2,5–2	Z7.280.6227.0	10	IVB WKF 2,5–2	Z7.280.6227.0	10
insulated	3 pole	IVB WKF 2,5–3	Z7.280.6327.0	10	IVB WKF 2,5–3	Z7.280.6327.0	10
	4 pole	IVB WKF 2,5–4	Z7.280.6427.0	10	IVB WKF 2,5–4	Z7.280.6427.0	10
	5 pole	IVB WKF 2,5–5	Z7.280.6527.0	10	IVB WKF 2,5–5	Z7.280.6527.0	10
	until 10 pole	IVB WKF 2,5–10	Z7.280.7027.0	20	IVB WKF 2,5–10	Z7.280.7027.0	20
Vertical cross connector	1 pole	IVB WKF–V	Z7.261.1127.0	10	IVB WKF–V	Z7.261.1127.0	10
6. Wire entry guide	0.13–0.2 mm²	LELN 2,5/1 WEISS	05.564.3755.0	100	LELN 2,5/1 WEISS	05.564.3755.0	100
	0.25–0.5 mm²	LELN 2,5/2 GRAU	05.564.3855.0	100	LELN 2,5/2 GRAU	05.564.3855.0	100
	0.75–1.0 mm²	LELN 2,5/3 SCHWARZ	05.564.3955.0	100	LELN 2,5/3 SCHWARZ	05.564.3955.0	100
7. Cover with warning symbol over 4 blocks		ADFN 2,5/4 GELB	04.343.8353.8	10	ADFN 2,5/4 GELB	04.343.8353.8	10
8. Marking tag carrier, 2-fold		BT 5/2	04.243.0855.0	100	BT 5/2	04.243.0855.0	100
9. Test adapter, modular		PS WKC/F	Z1.299.9753.0	10	PS WKC/F	Z1.299.9753.0	10
10. Test plug		ST 2/2,3	Z5.553.2921.0	10	ST 2/2,3	Z5.553.2921.0	10
11. Screwdriver, uninsulated		DIN 5264 B 0,6x3,5	06.502.4000.0	5	DIN 5264 B 0,6x3,5	06.502.4000.0	5
Screwdriver, uninsulated, MINI		DIN 5264 B 0,6x3,5 M	06.502.5000.0	10	DIN 5264 B 0,6x3,5 M	06.502.5000.0	10
Marking accessories see page 76–79							

[1] Follow the Ex installation instructions on the cover page
[2] solid/fine-stranded
* When using cross connectors on the upper tier

Subject to change without further notice

fasis

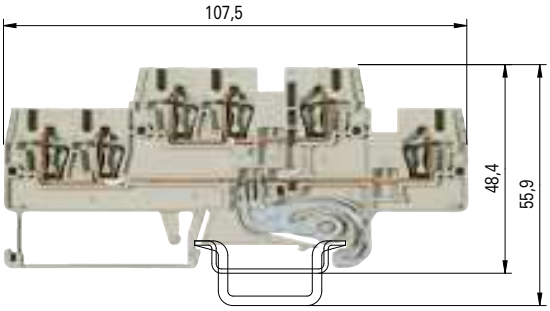

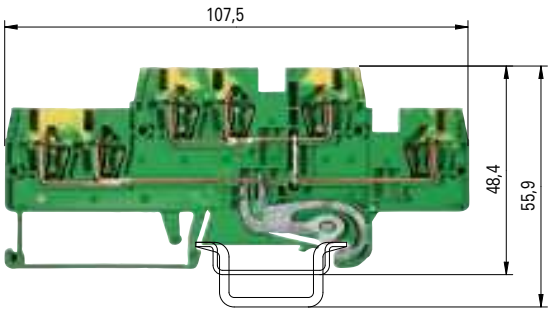

WKFN 2,5 E1/2/D/SL/35
WKFN 2,5 E1/2/N/SL/35

fine-stranded	solid	V	A
0.13–2.5 mm²	0.13–4 mm²	500 V/6 kV/3	22
No. 22-12 AWG		300 V	20
No. 24-12 AWG		300 V	24
5 mm			11 mm

WKFN 2,5 E1/2/SL/35

fine-stranded	solid	V	A
0.13–2.5 mm²	0.13–4 mm²	500 V/6 kV/3	
No. 22-12 AWG		600 V	
No. 24-12 AWG		600 V	
0.2–2.5 mm²	0.13–4 mm²		
5 mm			11 mm

Type	Part No.	Std. Pack	Type	Part No.	Std. Pack
WKFN 2,5 E1/2/D/SL/35	56.703.6155.0	50			
WKFN 2,5 E1/2/N/SL/35	56.703.6455.0	50			
			WKFN 2,5 E/SL/35	56.703.6255.0	50
35x27x7,5 EN 60715	98.300.0000.0	1	35x27x7,5 EN 60715	98.300.0000.0	1
35x24x15 EN 60715	98.360.0000.0	1	35x24x15 EN 60715	98.360.0000.0	1
9708/2 S35	Z5.522.8553.0	100	9708/2 S35	Z5.522.8553.0	100
WEF 1/35	Z5.523.9353.0	100	WEF 1/35	Z5.523.9353.0	100
APFN 2,5 E1/2	07.312.7755.0	10			
			APFN 2,5 E1/2 GRÜN	07.312.7755.7	10
TWFN 2,5 E1/2	07.312.7855.0	10			
IVB WKF 2,5–2	Z7.280.6227.0	10			
IVB WKF 2,5–3	Z7.280.6327.0	10			
IVB WKF 2,5–4	Z7.280.6427.0	10			
IVB WKF 2,5–5	Z7.280.6527.0	10			
IVB WKF 2,5–10	Z7.280.7027.0	20			
IVB WKF–V	Z7.261.1127.0	10			
LELN 2,5/1 WEISS	05.564.3755.0	100	LELN 2,5/1 WEISS	05.564.3755.0	100
LELN 2,5/2 GRAU	05.564.3855.0	100	LELN 2,5/2 GRAU	05.564.3855.0	100
LELN 2,5/3 SCHWARZ	05.564.3955.0	100	LELN 2,5/3 SCHWARZ	05.564.3955.0	100
ADFN 2,5/4 GELB	04.343.8353.8	10	ADFN 2,5/4 GELB	04.343.8353.8	10
BT 5/2	04.243.0855.0	100	BT 5/2	04.243.0855.0	100
PS WKC/F	Z1.299.9753.0	10	PS WKC/F	Z1.299.9753.0	10
ST 2/2,3	Z5.553.2921.0	10	ST 2/2,3	Z5.553.2921.0	10
DIN 5264 B 0,6x3,5	06.502.4000.0	5	DIN 5264 B 0,6x3,5	06.502.4000.0	5
DIN 5264 B 0,6x3,5 M	06.502.5000.0	10	DIN 5264 B 0,6x3,5 M	06.502.5000.0	10

WKFN 2,5 E1/2/35 Block color: gray

	Function	Color ID
Upper tier	Feed-through	gray
Lower tier	Feed-through	gray

WKFN 2,5 E1/2/N/D/35 Block color: gray

	Function	Color ID
Upper tier	Feed-through	blue
Lower tier	Feed-through	gray

WKFN 2,5 E1/2/VB/35 Block color: black

	Function	Color ID
Upper tier	Feed-through	black
Lower tier	vertically jumpered	black

WKFN 2,5 E1/2/D/SL/35 Block color: gray

	Function	Color ID
Upper tier	Feed-through	gray
Lower tier	Ground conductor	green/yellow

WKFN 2,5 E1/2/N/SL/35 Block color: gray


	Function	Color ID
Upper tier	Feed-through	blue
Lower tier	Ground conductor	green/yellow


WKFN 2,5 E1/2/SL/35 Block color: green/yellow

	Function	Color ID
Upper tier	Ground conductor	green/yellow
Lower tier	vertically jumpered	green/yellow

Multi-tier terminal blocks with tension spring connection

fasis

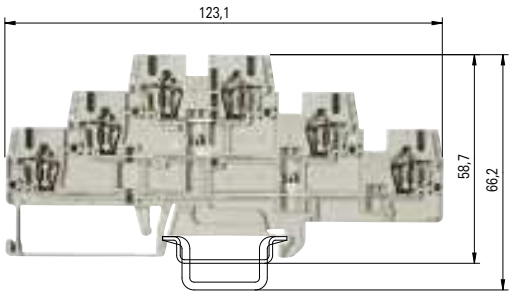

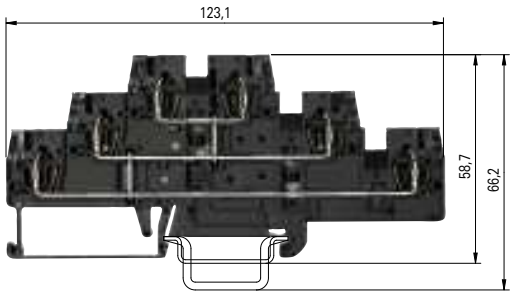

0344 Ⓔx II 2GD IM2
Ex e I/II
EN 60 947-7-1:2002
UL ratings field/factory wiring
CSA ratings
PTB 04 ATEX 1051 U1) EN 60 079-0/EN 60 079-7
Width Wire strip length
Approvals

WKFN 2,5 E3/35

fine-stranded	solid	V	A
0.13–2.5 mm²	0.13–4 mm²	500 V/6 kV/3	20
No. 22-12 AWG		300 V	20
No. 24-12 AWG		300 V	24
0.2–2.5 mm²	0.13–4 mm²	440/275*	19/17,5[2)]
5 mm			11 mm

PTB VDE UL UL AEx CSA CSA Ex

WKFN 2,5 E3/VB/35

fine-stranded	solid	V	A
0.13–2.5 mm²	0.13–4 mm²	500 V/6 kV/3	24
No. 22-12 AWG		600 V	20
No. 24-12 AWG		600 V	24
0.2–2.5 mm²	0.13–4 mm²	440	20/19[2)]
5 mm			11 mm


PTB VDE UL CSA CSA Ex


		Type	Part No.	Std. Pack	Type	Part No.	Std. Pack
Multi-tier block	gray	WKFN 2,5 E3/35	56.703.3055.0	50			
Multi-tier block, vertically connected	black				WKFN 2,5 E3/VB/35	56.703.2955.1	50
Multi-tier block, combined	gray						
Multi-tier block, combined	gray						
Multi-tier ground block	green/yellow						
Accessories							
1. Mounting rail 35, 7.5 mm high	L = 2 m	35x27x7,5 EN 60715	98.300.0000.0	1	35x27x7,5 EN 60715	98.300.0000.0	1
Mounting rail 35, 15 mm high	L = 2 m	35x24x15 EN 60715	98.360.0000.0	1	35x24x15 EN 60715	98.360.0000.0	1
2. End clamp TS 35, with screw	8 mm wide	9708/2 S35	Z5.522.8553.0	100	9708/2 S35	Z5.522.8553.0	100
End clamp TS 35, without screw	8 mm wide	WEF 1/35	Z5.523.9353.0	100	WEF 1/35	Z5.523.9353.0	100
3. End plate	gray	APFN 2,5 E3	07.312.7555.0	10	APFN 2,5 E3	07.312.7555.0	10
	blue						
	green						
4. Partition plate	gray	TWFN 2,5 E3	07.312.7655.0	10	TWFN 2,5 E3	07.312.7655.0	10
	blue						
5. Cross connector	2 pole	IVB WKF 2,5–2	Z7.280.6227.0	10	IVB WKF 2,5–2	Z7.280.6227.0	10
insulated	3 pole	IVB WKF 2,5–3	Z7.280.6327.0	10	IVB WKF 2,5–3	Z7.280.6327.0	10
	4 pole	IVB WKF 2,5–4	Z7.280.6427.0	10	IVB WKF 2,5–4	Z7.280.6427.0	10
	5 pole	IVB WKF 2,5–5	Z7.280.6527.0	10	IVB WKF 2,5–5	Z7.280.6527.0	10
	until 10 pole	IVB WKF 2,5–10	Z7.280.7027.0	20	IVB WKF 2,5–10	Z7.280.7027.0	20
Vertical cross connector	1 pole	IVB WKF–V	Z7.261.1127.0	10	IVB WKF–V	Z7.261.1127.0	10
6. Wire entry guide	0.13–0.2 mm²	LELN 2,5/1 WEISS	05.564.3755.0	100	LELN 2,5/1 WEISS	05.564.3755.0	100
	0.25–0.5 mm²	LELN 2,5/2 GRAU	05.564.3855.0	100	LELN 2,5/2 GRAU	05.564.3855.0	100
	0.75–1.0 mm²	LELN 2,5/3 SCHWARZ	05.564.3955.0	100	LELN 2,5/3 SCHWARZ	05.564.3955.0	100
7. Cover with warning symbol over 4 blocks		ADFN 2,5/4 GELB	04.343.8353.8	10	ADFN 2,5/4 GELB	04.343.8353.8	10
8. Marking tag carrier, 2-fold		BT 5/3	04.243.0755.0	100	BT 5/3	04.243.0755.0	100
9. Test adapter, modular		PS WKC/F	Z1.299.9753.0	10	PS WKC/F	Z1.299.9753.0	10
10. Test plug		ST 2/2,3	Z5.553.2921.0	10	ST 2/2,3	Z5.553.2921.0	10
11. Screwdriver, uninsulated		DIN 5264 B 0,6x3,5	06.502.4000.0	5	DIN 5264 B 0,6x3,5	06.502.4000.0	5
Screwdriver, uninsulated, MINI		DIN 5264 B 0,6x3,5 M	06.502.5000.0	10	DIN 5264 B 0,6x3,5 M	06.502.5000.0	10
Marking accessories see page 76–79							

[1)] Follow the Ex installation instructions on the cover page
[2)] solid/fine-stranded
* When using cross connectors on the upper tier

Subject to change without further notice

fasis

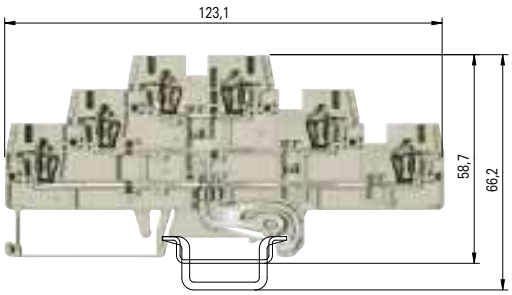

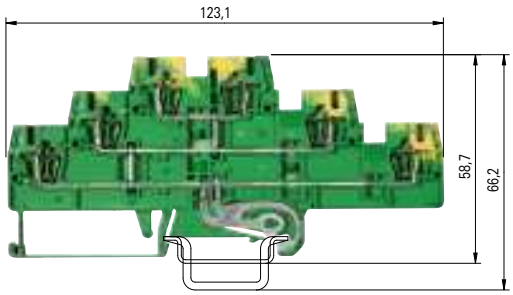

WKFN 2,5 E3/D/D/SL/35
WKFN 2,5 E3/N/D/SL/35

fine-stranded	solid	V	A
0.13–2.5 mm²	0.13–4 mm²	500 V/6 kV/3	24
No. 22-12 AWG		300 V	20
No. 24-12 AWG		300 V	24

5 mm 11 mm

WKFN 2,5 E3/SL/35

fine-stranded	solid	V	A
0.13–2.5 mm²	0.13–4 mm²	500 V/6 kV/3	
No. 22-12 AWG		600 V	
No. 24-12 AWG		600 V	
0.2–2.5 mm²	0.13–4 mm²		

5 mm 11 mm

Type	Part No.	Std. Pack	Type	Part No.	Std. Pack
WKFN 2,5 E3/D/D/SL/35	56.703.3355.0	50			
WKFN 2,5 E3/N/D/SL/35	56.703.3255.0	50			
			WKFN 2,5 E/SL/35	56.703.8855.0	50
35x27x7,5 EN 60715	98.300.0000.0	1	35x27x7,5 EN 60715	98.300.0000.0	1
35x24x15 EN 60715	98.360.0000.0	1	35x24x15 EN 60715	98.360.0000.0	1
9708/2 S35	Z5.522.8553.0	100	9708/2 S35	Z5.522.8553.0	100
WEF 1/35	Z5.523.9353.0	100	WEF 1/35	Z5.523.9353.0	100
APFN 2,5 E3	07.312.7555.0	10			
			APFN 2,5 E3 GRÜN	07.312.7555.7	10
TWFN 2,5 E3	07.312.7655.0	10			
IVB WKF 2,5–2	Z7.280.6227.0	10			
IVB WKF 2,5–3	Z7.280.6327.0	10			
IVB WKF 2,5–4	Z7.280.6427.0	10			
IVB WKF 2,5–5	Z7.280.6527.0	10			
IVB WKF 2,5–10	Z7.280.7027.0	20			
IVB WKF–V	Z7.261.1127.0	10			
LELN 2,5/1 WEISS	05.564.3755.0	100	LELN 2,5/1 WEISS	05.564.3755.0	100
LELN 2,5/2 GRAU	05.564.3855.0	100	LELN 2,5/2 GRAU	05.564.3855.0	100
LELN 2,5/3 SCHWARZ	05.564.3955.0	100	LELN 2,5/3 SCHWARZ	05.564.3955.0	100
ADFN 2,5/4 GELB	04.343.8353.8	10	ADFN 2,5/4 GELB	04.343.8353.8	10
BT 5/3	04.243.0755.0	100	BT 5/3	04.243.0755.0	100
PS WKC/F	Z1.299.9753.0	10	PS WKC/F	Z1.299.9753.0	10
ST 2/2,3	Z5.553.2921.0	10	ST 2/2,3	Z5.553.2921.0	10
DIN 5264 B 0,6x3,5	06.502.4000.0	5	DIN 5264 B 0,6x3,5	06.502.4000.0	5
DIN 5264 B 0,6x3,5 M	06.502.5000.0	10	DIN 5264 B 0,6x3,5 M	06.502.5000.0	10

WKFN 2,5 E3/35 Block color: gray

	Function	Color ID
Upper tier	Feed-through	gray
center tier	Feed-through	gray
Lower tier	Feed-through	gray

WKFN 2,5 E3/VB/35 Block color: black

	Function	Color ID
Upper tier	Feed-through	black
center tier	vertically jumpered	black
Lower tier		black

WKFN 2,5 E3/D/D/SL/35 Block color: gray

	Function	Color ID
Upper tier	Feed-through	gray
center tier	Feed-through	gray
Lower tier	Ground conductor	green/yellow

WKFN 2,5 E3/N/D/SL/35 Block color: gray


	Function	Color ID
Upper tier	Feed-through	blue
center tier	Feed-through	gray
Lower tier	Ground conductor	green/yellow


WKFN 2,5 E3/SL/35 Block color: green/yellow

	Function	Color ID
Upper tier	Ground conductor	green/yellow
center tier	vertically jumpered	green/yellow
Lower tier		green/yellow

Multi-tier terminal blocks with tension spring connection

fasis

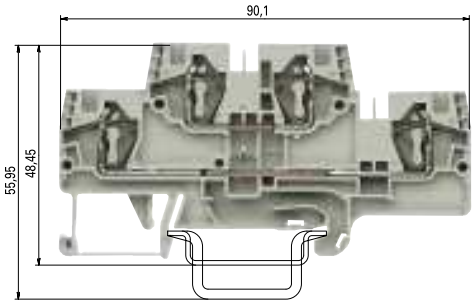

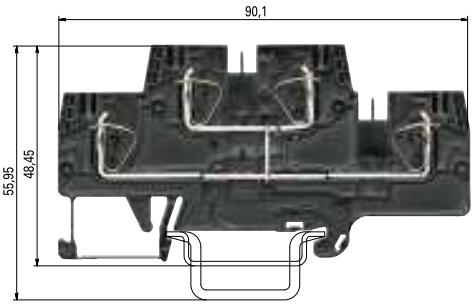

0344 Ⓔx II 2GD IM2
Ex e I/II
EN 60 947-7-1:2002
UL ratings field/factory wiring
CSA ratings
PTB 05 ATEX 1104 U1) EN 60 079-0/EN 60 079-7
Width Wire strip length
Approvals

WKFN 4 E/35
WKFN 4 E/N/D/35

fine-stranded	solid	V	A
0.13–4 mm²	0.13–6 mm²	500 V/6 kV/3	32
No. 24-10 AWG		300 V	30
No. 24-10 AWG		300 V	32
0.13–4 mm²	0.2–6 mm²	440/352*	27/24,5[2)]
6 mm			11 mm

PTB VDE UL

WKFN 4 E/VB/35

fine-stranded	solid	V	A
0.13–4 mm²	0.13–6 mm²	500 V/6 kV/3	32
No. 24-10 AWG		600 V	30
No. 24-10 AWG		300 V	32
0.13–4 mm²	0.2–6 mm²	440	30/27[2)]
6 mm			11 mm


PTB VDE UL


			Type	Part No.	Std. Pack	Type	Part No.	Std. Pack
Multi-tier block		gray	WKFN 4 E/35	56.704.7055.0	100			
Multi-tier block, vertically connected		black				WKFN 4 E/VB/35	56.704.6955.1	100
Multi-tier block, combined		gray	WKFN 4 E/N/D/35	56.704.7655.0	100			
Multi-tier block, combined		gray						
Multi-tier ground block		green/yellow						
Accessories								
1. Mounting rail 35, 7.5 mm high		L = 2 m	35x27x7,5 EN 60715	98.300.0000.0	1	35x27x7,5 EN 60715	98.300.0000.0	1
Mounting rail 35, 15 mm high		L = 2 m	35x24x15 EN 60715	98.360.0000.0	1	35x24x15 EN 60715	98.360.0000.0	1
2. End clamp TS 35, with screw		8 mm wide	9708/2 S35	Z5.522.8553.0	100	9708/2 S35	Z5.522.8553.0	100
End clamp TS 35, without screw		8 mm wide	WEF 1/35	Z5.523.9353.0	100	WEF 1/35	Z5.523.9353.0	100
3. End plate	1,5 mm wide	gray	APFN 4 E...	07.312.9655.0	10	APFN 4 E...	07.312.9655.0	10
	1,5 mm wide	blue						
	1,5 mm wide	green						
4. Partition plate	1,5 mm wide	gray	TWFN 4 E...	07.312.9755.0	10	TWFN 4 E...	07.312.9755.0	10
	1,5 mm wide	blue						
5. Cross connector		2 pole	IVB WKF 4–2	Z7.261.1227.0	10	IVB WKF 4–2	Z7.261.1227.0	10
insulated		3 pole	IVB WKF 4–3	Z7.261.1327.0	10	IVB WKF 4–3	Z7.261.1327.0	10
		4 pole	IVB WKF 4–4	Z7.261.1427.0	10	IVB WKF 4–4	Z7.261.1427.0	10
		5 pole	IVB WKF 4–5	Z7.261.1527.0	10	IVB WKF 4–5	Z7.261.1527.0	10
		6 pole	IVB WKF 4–6	Z7.261.1627.0	10	IVB WKF 4–6	Z7.261.1627.0	10
		7 pole	IVB WKF 4–7	Z7.261.1727.0	20	IVB WKF 4–7	Z7.261.1727.0	20
		8 pole	IVB WKF 4–8	Z7.261.1827.0	20	IVB WKF 4–8	Z7.261.1827.0	20
		9 pole	IVB WKF 4–9	Z7.261.1927.0	20	IVB WKF 4–9	Z7.261.1927.0	20
		10 pole	IVB WKF 4–10	Z7.261.2027.0	20	IVB WKF 4–10	Z7.261.2027.0	20
6. Vertical cross connector		1 pole	IVB WKF-V*[)]	Z7.261.1127.0	10			
7. Wire entry guide		0.13–0.2 mm²	LEL 4/1 WEISS	05.561.8553.0	100	LEL 4/1 WEISS	05.561.8553.0	100
		0.25–0.5 mm²	LEL 4/2 GRAU	05.561.8653.0	100	LEL 4/2 GRAU	05.561.8653.0	100
		0.75–1.0 mm²	LEL 4/3 SCHWARZ	05.561.8753.0	100	LEL 4/3 SCHWARZ	05.561.8753.0	100
8. Cover with warning symbol over 4 blocks			ADF 4/4 GELB	04.343.6153.8	10	ADF 4/4 GELB	04.343.6153.8	10
9. Screwdriver, uninsulated			DIN 5264 B 0,6x3,5	06.502.4000.0	5	DIN 5264 B 0,6x3,5	06.502.4000.0	5
Screwdriver, uninsulated, MINI			DIN 5264 B 0,6x3,5 M	06.502.5000.0	10	DIN 5264 B 0,6x3,5 M	06.502.5000.0	10
Marking accessories see page 76–79								

[1)] Follow the Ex installation instructions on the cover page
[2)] solid/fine-stranded
* When using cross connectors on the upper tier

Subject to change without further notice

fasis

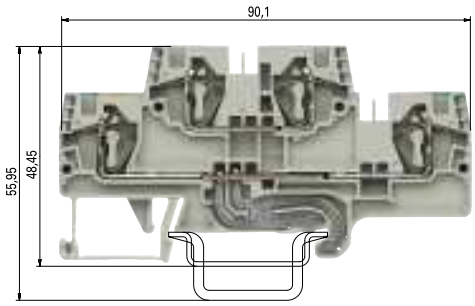

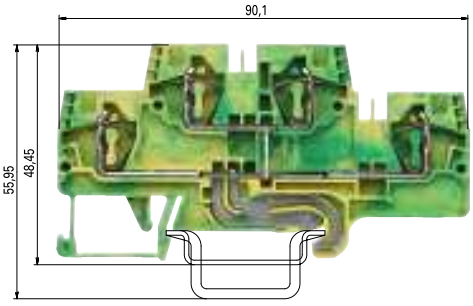

WKFN 4 E/D/SL/35
WKFN 4 E/N/SL/35

fine-stranded	solid	V	A
0.13–4 mm²	0.13–6 mm²	500 V/6 kV/3	32
No. 24-10 AWG		300 V	30
No. 24-10 AWG		300 V	32

6 mm — 11 mm

PTB VDE UL

WKFN 4 E/SL/35

fine-stranded	solid	V	A
0.13–4 mm²	0.13–6 mm²	500 V/6 kV/3	
No. 24-10 AWG		600 V	
No. 24-10 AWG		600 V	
0.13–4 mm²	0.2–6 mm²		

6 mm — 11 mm

PTB VDE UL

Type	Part No.	Std. Pack	Type	Part No.	Std. Pack
WKFN 4 E/D/SL/35	56.704.7855.0	100			
WKFN 4 E/N/SL/35	56.704.7755.0	100			
			WKFN 4 E SL/35	56.704.9255.0	100
35x27x7,5 EN 60715	98.300.0000.0	1	35x27x7,5 EN 60715	98.300.0000.0	1
35x24x15 EN 60715	98.360.0000.0	1	35x24x15 EN 60715	98.360.0000.0	1
9708/2 S35	Z5.522.8553.0	100	9708/2 S35	Z5.522.8553.0	100
WEF 1/35	Z5.523.9353.0	100	WEF 1/35	Z5.523.9353.0	100
APFN 4 E...	07.312.9655.0	10			
			APFN 4 E...	07.312.9655.7	10
TWFN 4 E...	07.312.9755.0	10			
IVB WKF 4–2	Z7.261.1227.0	10			
IVB WKF 4–3	Z7.261.1327.0	10			
IVB WKF 4–4	Z7.261.1427.0	10			
IVB WKF 4–5	Z7.261.1527.0	10			
IVB WKF 4–6	Z7.261.1627.0	10			
IVB WKF 4–7	Z7.261.1727.0	20			
IVB WKF 4–8	Z7.261.1827.0	20			
IVB WKF 4–9	Z7.261.1927.0	20			
IVB WKF 4–10	Z7.261.2027.0	20			
LEL 4/1 WEISS	05.561.8553.0	100	LEL 4/1 WEISS	05.561.8553.0	100
LEL 4/2 GRAU	05.561.8653.0	100	LEL 4/2 GRAU	05.561.8653.0	100
LEL 4/3 SCHWARZ	05.561.8753.0	100	LEL 4/3 SCHWARZ	05.561.8753.0	100
ADF 4/4 GELB	04.343.6153.8	10	ADF 4/4 GELB	04.343.6153.8	10
DIN 5264 B 0,6x3,5	06.502.4000.0	5	DIN 5264 B 0,6x3,5	06.502.4000.0	5
DIN 5264 B 0,6x3,5 M	06.502.5000.0	10	DIN 5264 B 0,6x3,5 M	06.502.5000.0	10

WKFN 4 E/35 — Block color: gray

	Function	Color ID
Upper tier	Feed-through	gray
Lower tier	Feed-through	gray

WKFN 4 E/N/D/35 — Block color: gray

	Function	Color ID
Upper tier	Feed-through	blue
Lower tier	Feed-through	gray

WKFN 4 E/VB/35 — Block color: black

	Function	Color ID
Upper tier	Feed-through	black
Lower tier	vertically jumpered	black

WKFN 4 E/D/SL/35 — Block color: gray

	Function	Color ID
Upper tier	Feed-through	gray
Lower tier	Ground conductor	green/yellow

WKFN 4 E/N/SL/35 — Block color: gray


	Function	Color ID
Upper tier	Feed-through	blue
Lower tier	Ground conductor	green/yellow


WKFN 4 E/SL/35 — Block color: green/yellow

	Function	Color ID
Upper tier	Ground conductor	green/yellow
Lower tier	vertically jumpered	green/yellow

Multi-tier function blocks with tension spring connection

fasis

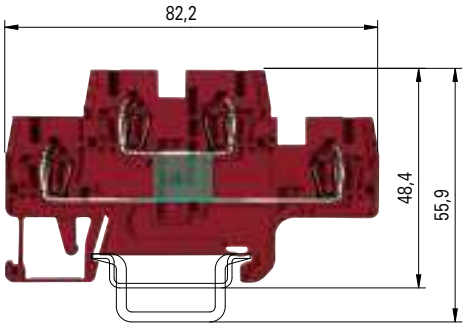

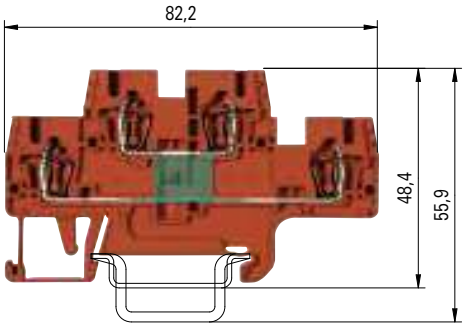

WKFN 2,5 E...G


		fine-stranded solid	V	A
EN 60 947-7-1:2002		0.13–2.5 mm² 0.13–4 mm²		
UL ratings	field/factory wiring	No. 22-12 AWG		
CSA ratings		No. 24-12 AWG		
Width	Wire strip length	5 mm	11 mm	
Approvals				

The multi-tier block is available on request as a function block for most different switching tasks.


		Type	Part No.	Std. Pack
Function block	red	WKFN 2,5 E.../35	56.703.XX55.5	100
Function block	orange	WKFN 2,5 E.../35	56.703.XX55.9	100
Accessories				
1. Mounting rail 35, 7.5 mm high	L = 2 m	35x27x7,5 EN 60715	98.300.0000.0	1
Mounting rail 35, 15 mm hig	L = 2 m	35x24x15 EN 60715	98.360.0000.0	1
2. End clamp TS 35, with screw	8 mm wide	9708/2 S35	Z5.522.8553.0	100
End clamp TS 35, without screw	8 mm wide	WEF 1/35	Z5.523.9353.0	100
3. End plate	gray	APFN 2,5 E	07.312.7355.0	10
	blue			
	green			
4. Partition plate	gray	TWFN 2,5 E	07.312.7455.0	10
	blue			
5. Cross connector	2 pole	IVB WKF 2,5–2	Z7.280.6227.0	10
insulated	3 pole	IVB WKF 2,5–3	Z7.280.6327.0	10
	4 pole	IVB WKF 2,5–4	Z7.280.6427.0	10
	5 pole	IVB WKF 2,5–5	Z7.280.6527.0	10
	6 pole	IVB WKF 2,5–6	Z7.280.6627.0	10
	7 pole	IVB WKF 2,5–7	Z7.280.6727.0	20
	8 pole	IVB WKF 2,5–8	Z7.280.6827.0	20
	9 pole	IVB WKF 2,5–9	Z7.280.6927.0	20
	10 pole	IVB WKF 2,5–10	Z7.280.7027.0	20
Vertical cross connector	1 pole	IVB WKF–V	Z7.261.1127.0	10
6. Wire entry guide	0.13–0.2 mm²	LELN 2,5/1 WEISS	05.564.3755.0	100
	0.25–0.5 mm²	LELN 2,5/2 GRAU	05.564.3855.0	100
	0.75–1.0 mm²	LELN 2,5/3 SCHWARZ	05.564.3955.0	100
7. Cover with warning symbol over 4 blocks		ADFN 2,5/4 GELB	04.343.8353.8	10
8. Marking tag carrier, 2-fold		BT 4/2	04.243.0953.0	100
9. Test adapter, modular		PS WKC/F	Z1.299.9753.0	10
10. Test plug		ST 2/2,3	Z5.553.2921.0	10
11. Screwdriver, uninsulated		DIN 5264 B 0,6x3,5	06.502.4000.0	5
Screwdriver, uninsulated, MINI		DIN 5264 B 0,6x3,5 M	06.502.5000.0	10
Marking accessories see page 76–79				

Function diagram


56.703.7555.9
56.703.7555.5



56.703.7155.5
56.703.7155.9




56.703.8055.9




I = 1 A
U = 1000 V

56.703.8255.5




I = 1 A
U = 1000 V

56.703.7955.5




I = 1 A
U = 1000 V

56.703.8355.5




I = 1 A
U = 1000 V

56.703.7455.9
LED rot




R = 4.7 kΩ
P = 0.5 W
U = 24 V DC

56.703.7255.5
LED rot



R = 4.7 kΩ
P = 0.5 W
U = 24 V DC


56.703.7355.5




R = 680 kΩ
P = 0.25 W
U = 100-500 V

Subject to change without further notice

fasis

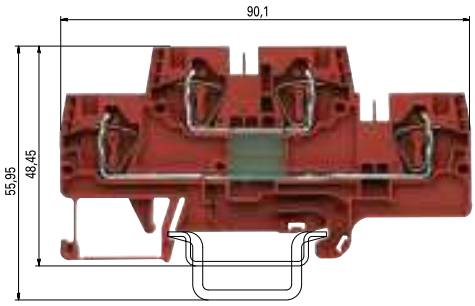

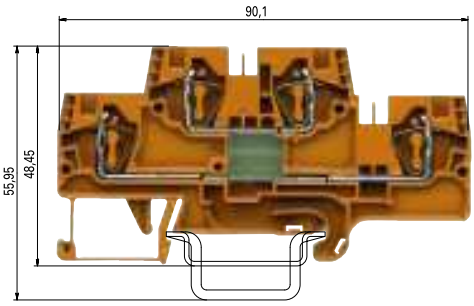

WKFN 4 E /35...


		fine-stranded	solid	V	A
EN 60 947-7-1:2002		0.13–4 mm²	0.13–6 mm²		
UL ratings	field/factory wiring	No. 24-10 AWG			
CSA ratings		No. 24-10 AWG			
Width	Wire strip length	6 mm		11 mm	
Approvals					

The multi-tier block is available on request as a function block for most different switching tasks.


		Type	Part No.	Std. Pack
Function block	red	WKFN 4 E /35...	56.704.XX55.5	100
Function block	orange	WKFN 4 E /35...	56.704.XX55.9	100
Accessories				
1. Mounting rail 35, 7.5 mm high	L = 2 m	35x27x7,5 EN 60715	98.300.0000.0	1
Mounting rail 35, 15 mm hig	L = 2 m	35x24x15 EN 60715	98.360.0000.0	1
2. End clamp TS 35, with screw	8 mm wide	9708/2 S35	Z5.522.8553.0	100
End clamp TS 35, without screw	8 mm wide	WEF 1/35	Z5.523.9353.0	100
3. End plate	gray	APFN 4 E...	07.312.9655.0	10
	blue			
	green			
4. Partition plate	gray	TWFN 4 E...	07.312.9755.0	10
	blue			
5. Cross connector	2 pole	IVB WKF 4–2	Z7.261.1227.0	10
insulated	3 pole	IVB WKF 4–3	Z7.261.1327.0	10
	4 pole	IVB WKF 4–4	Z7.261.1427.0	10
	5 pole	IVB WKF 4–5	Z7.261.1527.0	10
	6 pole	IVB WKF 4–6	Z7.261.1627.0	10
	7 pole	IVB WKF 4–7	Z7.261.1727.0	20
	8 pole	IVB WKF 4–8	Z7.261.1827.0	20
	9 pole	IVB WKF 4–9	Z7.261.1927.0	20
	10 pole	IVB WKF 4–10	Z7.261.2027.0	20
Vertical cross connector	1 pole			
6. Wire entry guide	0.13–0.2 mm²	LEL 4/1 WEISS	05.561.8553.0	100
	0.25–0.5 mm²	LEL 4/2 GRAU	05.561.8653.0	100
	0.75–1.0 mm²	LEL 4/3 SCHWARZ	05.561.8753.0	100
7. Cover with warning symbol over 4 blocks		ADF 4/4 GELB	04.343.6153.8	10
8. Marking tag carrier, 2-fold		BT 4/2	04.243.0953.0	100
9. Test adapter, modular		PS WKC/F	Z1.299.9753.0	10
10. Test plug		ST 2/2,3	Z5.553.2921.0	10
11. Screwdriver, uninsulated		DIN 5264 B 0,6x3,5	06.502.4000.0	5
Screwdriver, uninsulated, MINI		DIN 5264 B 0,6x3,5 M	06.502.5000.0	10

Function diagram


56.704.7555.9
56.704.7555.5



56.704.7155.5
56.704.7155.9




56.704.8055.9




I = 1 A
U = 1000 V

56.704.8255.5




I = 1 A
U = 1000 V

56.704.7955.5




I = 1 A
U = 1000 V

56.704.8355.5




I = 1 A
U = 1000 V

56.704.7455.9
LED rot




R = 4.7 kΩ
P = 0.5 W
U = 24 V DC

56.704.7255.5
LED rot



R = 4.7 kΩ
P = 0.5 W
U = 24 V DC


56.704.7355.5




R = 680 kΩ
P = 0.25 W
U = 100-500 V

Disconnect terminal blocks with tension spring connection

fasis

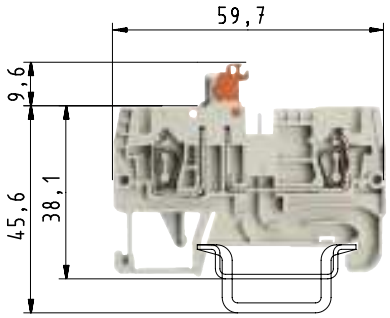

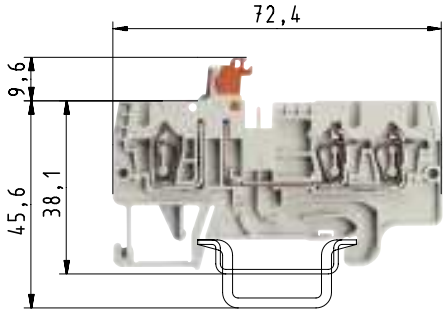

0344 Ⓔx II 2GD IM2
Ex e I/II
EN 60 947-7-1:2002
UL ratings
CSA ratings
KEMA 01 ATEX 2087 U[1)]
Width
Approvals

field/factory wiring
EN 60 079-0/EN 60 079-7
Wire strip length

WKFN 2,5 TKM/35

fine-stranded	solid	V	A
0.14–2,5 mm²	0.2–4 mm²	630 V/6 kV/3	20
No. 24-12 AWG		300 V	19
No. 24-12 AWG		300 V	20

5 mm — 11 mm

WKFN 2,5 TKM 1/2/35

fine-stranded	solid	V	A
0.14–2.5 mm²	0.2–4 mm²	630 V/6 kV/3	20
No. 24-12 AWG		300 V	19
No. 24-12 AWG		300 V	20

5 mm — 11 mm


		Type	Part No.	Std. Pack	Type	Part No.	Std. Pack
Disconnect terminal block	gray	WKFN 2,5 TKM/35	56.703.5355.0	100	WKFN 2,5 TKM 1/2/35	56.703.5455.0	100
Supply terminal	gray						
Accessories							
1. Mounting rail 35, Din rail 7.5 mm high	L = 2 m	35x27x7,5 EN 60715	98.300.0000.0	1	35x27x7,5 EN 60715	98.300.0000.0	1
Mounting rail 35, Din rail 15 mm high	L = 2 m	35x24x15 EN 60715	98.360.0000.0	1	35x24x15 EN 60715	98.360.0000.0	1
2. End clamp TS 35, with screw	8 mm wide	9708/2 S35	Z5.522.8553.0	100	9708/2 S35	Z5.522.8553.0	100
End clamp TS 35, without screw	8 mm wide	WEF 1/35	Z5.523.9353.0	100	WEF 1/35	Z5.523.9353.0	100
3. End plate	gray	APFN 2,5 D1/2	07.312.6955.0	10	APFN 2,5 D2/2	07.312.7155.0	10
	blue						
4. Partition	gray	TWFN 2,5 D1/2	07.312.7055.0	10	TWFN 2,5 D2/2	07.312.7255.0	10
	blue						
5. Cross connector	2 pole	IVB WKF 2,5–2	Z7.280.6227.0	10	IVB WKF 2,5–2	Z7.280.6227.0	10
insulated	3 pole	IVB WKF 2,5–3	Z7.280.6327.0	10	IVB WKF 2,5–3	Z7.280.6327.0	10
	4 pole	IVB WKF 2,5–4	Z7.280.6427.0	10	IVB WKF 2,5–4	Z7.280.6427.0	10
	5 pole	IVB WKF 2,5–5	Z7.280.6527.0	10	IVB WKF 2,5–5	Z7.280.6527.0	10
	6 pole	IVB WKF 2,5–6	Z7.280.6627.0	10	IVB WKF 2,5–6	Z7.280.6627.0	10
	7 pole	IVB WKF 2,5–7	Z7.280.6727.0	20	IVB WKF 2,5–7	Z7.280.6727.0	20
	8 pole	IVB WKF 2,5–8	Z7.280.6827.0	20	IVB WKF 2,5–8	Z7.280.6827.0	20
	9 pole	IVB WKF 2,5–9	Z7.280.6927.0	20	IVB WKF 2,5–9	Z7.280.6927.0	20
	10 pole	IVB WKF 2,5–10	Z7.280.7027.0	20	IVB WKF 2,5–10	Z7.280.7027.0	20
6. Wire entry guide	0.13–0.2 mm²	LELN 2,5/1 WEISS	05.564.3753.0	100	LELN 2,5/1 WEISS	05.564.3753.0	100
	0.25–0.5 mm²	LELN 2,5/1 GRAU	05.564.3853.0	100	LELN 2,5/1 GRAU	05.564.3853.0	100
	0.75–1.0 mm²	LELN 2,5/1 SCHWARZ	05.564.3953.0	100	LELN 2,5/1 SCHWARZ	05.564.3953.0	100
7. Cover with warning symbol for 4 terminals		ADFN 2,5/4 GELB	04.343.8353.8	10	ADFN 2,5/4 GELB	04.343.8353.8	10
8. Test adapter modular		PS WKC/F	Z1.299.9753.0	10	PS WKC/F	Z1.299.9753.0	10
9. Test plug		ST 2/2,3	Z5.553.2921.0	10	ST 2/2,3	Z5.553.2921.0	10
10. Screwdriver, uninsulated		DIN 5264 B 0,6x3,5	06.502.4000.0	5	DIN 5264 B 0,6x3,5	06.502.4000.0	5
Screwdriver, uninsulated, MINI		DIN 5264 B 0,6x3,5 M	06.502.5000.0	10	DIN 5264 B 0,6x3,5 M	06.502.5000.0	10

Marking accessories see page 76–79

[1)] Follow the Ex installation instructions on the cover page

Subject to change without further notice



fasis

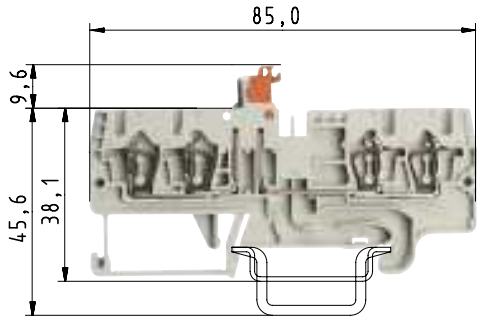


– Potential distribution with standard cross connector IVB WKF 2,5...

– Parallel connection of two cross connectors –> double jumpering

– Potential distributions are possible on one or both sides

Potential distribution				
Jumpering	one side		both sides	
	single	double	single	double
I_{max}	48	68	72	76
I_{Nblock}	24	24	24	24

$$I_{max} = \sum I_n \leq \sum I_{Nblock}$$

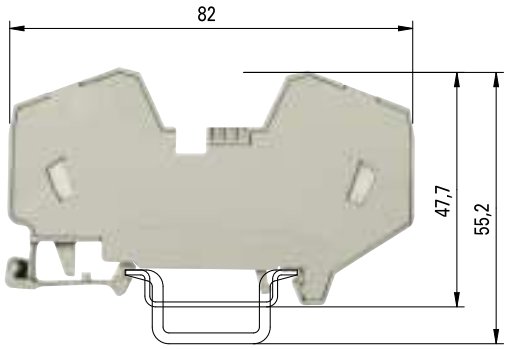

WKFN 2,5 TKM 2/2/35

fine-stranded	solid	V	A
0.14–2.5 mm²	0.2–4 mm²	630 V/6 kV/3	20
No. 24-12 AWG		300 V	19
No. 24-12 AWG		300 V	20

5 mm 11 mm

WKF 16/35 PV/WKFN

fine-stranded	solid/stranded	V	A
4–16 mm²	4–16 mm²	800 V/8 kV/3	76
No. 24-4 AWG		600 V	75
No. 12-4 AWG		600 V	78
4–16 mm²	4–16 mm²	690 V	64*
12 mm			15 mm


ATEX


Type	Part No.	Std. Pack	Type	Part No.	Std. Pack
WKFN 2,5 TKM 2/2/35	56.703.5555.0	50			
			WKF 16/35/PV/WKFN	56.716.0353.0	20
35x27x7,5 EN 60715	98.300.0000.0	1	35x27x7,5 EN 60715	98.300.0000.0	1
35x24x15 EN 60715	98.360.0000.0	1	35x24x15 EN 60715	98.360.0000.0	1
9708/2 S35	Z5.522.8553.0	100	9708/2 S35	Z5.522.8553.0	100
WEF 1/35	Z5.523.9353.0	100	WEF 1/35	Z5.523.9353.0	100
APFN 2,5 TKM D2/2	07.313.0055.0	10			
TWFN 2,5 TKM D2/2	07.313.0155.0	10			
IVB WKF 2,5–2	Z7.280.6227.0	10	IVB WKF 2,5–2	Z7.280.6227.0	10
IVB WKF 2,5–3	Z7.280.6327.0	10	IVB WKF 2,5–3	Z7.280.6327.0	10
IVB WKF 2,5–4	Z7.280.6427.0	10	IVB WKF 2,5–4	Z7.280.6427.0	10
IVB WKF 2,5–5	Z7.280.6527.0	10	IVB WKF 2,5–5	Z7.280.6527.0	10
IVB WKF 2,5–6	Z7.280.6627.0	10	IVB WKF 2,5–6	Z7.280.6627.0	10
IVB WKF 2,5–7	Z7.280.6727.0	20	IVB WKF 2,5–7	Z7.280.6727.0	20
IVB WKF 2,5–8	Z7.280.6827.0	20	IVB WKF 2,5–8	Z7.280.6827.0	20
IVB WKF 2,5–9	Z7.280.6927.0	20	IVB WKF 2,5–9	Z7.280.6927.0	20
IVB WKF 2,5–10	Z7.280.7027.0	20	IVB WKF 2,5–10	Z7.280.7027.0	20
LELN 2,5/1 WEISS	05.564.3753.0	100			
LELN 2,5/1 GRAU	05.564.3853.0	100			
LELN 2,5/1 SCHWARZ	05.564.3953.0	100			
ADFN 2,5/4 GELB	04.343.8353.8	10	ADF 16/4 GELB	04.343.6653.8	10
PS WKC/F	Z1.299.9753.0	10			
ST 2/2,3	Z5.553.2921.0	10	ST 2/2,3	Z5.553.2921.0	10
DIN 5264 B 0,6x3,5	06.502.4000.0	5	DIN 5264 B 1x5,5	06.502.4200.0	5
DIN 5264 B 0,6x3,5 M	06.502.5000.0	10			

* Type-specific output currents upon request

Multi-tier disconnect terminal blocks with tension spring connection

fasis

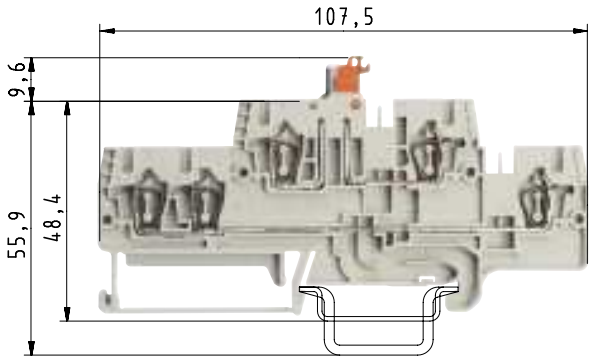

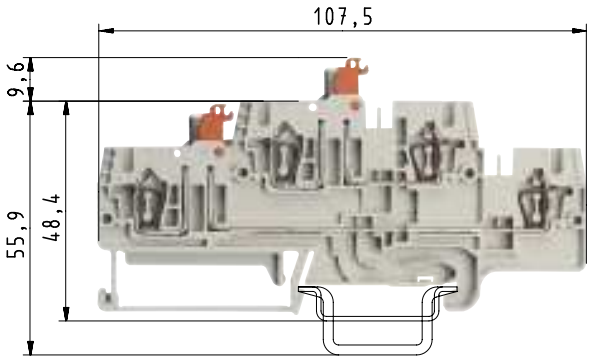

		WKFN 2,5 TKM E1/35			WKFN 2,5 TKM E2/35		
		fine-stranded	solid	V	A	fine-stranded	solid	V	A
EN 60 947-7-1:2002		0.14–2.5 mm²	0.2–4 mm²	500 V/6 kV/3	20	0.14–2.5 mm²	0.2–4 mm²	500 V/6 kV/3	19
UL ratings	field/factory wiring	No. 24-12 AWG		300 V	19	No. 24-12 AWG		300 V	19
CSA ratings		No. 24-12 AWG		300 V	20	No. 24-12 AWG		300 V	19
Width	Wire strip length	5 mm			11 mm	5 mm			11 mm
Approvals									

		Type	Part No.	Std. Pack	Type	Part No.	Std. Pack
Disconnect terminal block	gray	WKFN 2,5 TKM E1/35	56.703.6555.0	50	WKFN 2,5 TKM E2/35	56.703.6655.0	50
Accessories							
1. Mounting rail 35, Din rail 7.5 mm high	L = 2 m	35x27x7,5 EN 60715	98.300.0000.0	1	35x27x7,5 EN 60715	98.300.0000.0	1
Mounting rail 35, Din rail 15 mm high	L = 2 m	35x24x15 EN 60715	98.360.0000.0	1	35x24x15 EN 60715	98.360.0000.0	1
2. End clamp TS 35, with screw	8 mm wide	9708/2 S35	Z5.522.8553.0	100	9708/2 S35	Z5.522.8553.0	100
End clamp TS 35, without screw	8 mm wide	WEF 1/35	Z5.523.9353.0	100	WEF 1/35	Z5.523.9353.0	100
3. End plate	gray	APFN 2,5 E1/2	07.312.7755.0	10	APFN 2,5 E1/2	07.312.7755.0	10
	blue						
4. Partition	gray	TWFN 2,5 E1/2	07.312.7855.0	10	TWFN 2,5 E1/2	07.312.7855.0	10
	blue						
5. Cross connector	2 pole	IVB WKF 2,5–2	Z7.280.6227.0	10	IVB WKF 2,5–2	Z7.280.6227.0	10
insulated	3 pole	IVB WKF 2,5–3	Z7.280.6327.0	10	IVB WKF 2,5–3	Z7.280.6327.0	10
	4 pole	IVB WKF 2,5–4	Z7.280.6427.0	10	IVB WKF 2,5–4	Z7.280.6427.0	10
	5 pole	IVB WKF 2,5–5	Z7.280.6527.0	10	IVB WKF 2,5–5	Z7.280.6527.0	10
	6 pole	IVB WKF 2,5–6	Z7.280.6627.0	10	IVB WKF 2,5–6	Z7.280.6627.0	10
	7 pole	IVB WKF 2,5–7	Z7.280.6727.0	20	IVB WKF 2,5–7	Z7.280.6727.0	20
	8 pole	IVB WKF 2,5–8	Z7.280.6827.0	20	IVB WKF 2,5–8	Z7.280.6827.0	20
	9 pole	IVB WKF 2,5–9	Z7.280.6927.0	20	IVB WKF 2,5–9	Z7.280.6927.0	20
	10 pole	IVB WKF 2,5–10	Z7.280.7027.0	20	IVB WKF 2,5–10	Z7.280.7027.0	20
Vertical cross connector	1 pole	IVB WKF-V	Z7.261.1127.0	10	IVB WKF-V	Z7.261.1127.0	10
6. Wire entry guide	0.13–0.2 mm²	LELN 2,5/1 WEISS	05.564.3753.0	100	LELN 2,5/1 WEISS	05.564.3753.0	100
	0.25–0.5 mm²	LELN 2,5/1 GRAU	05.564.3853.0	100	LELN 2,5/1 GRAU	05.564.3853.0	100
	0.75–1.0 mm²	LELN 2,5/1 SCHWARZ	05.564.3953.0	100	LELN 2,5/1 SCHWARZ	05.564.3953.0	100
7. Cover with warning symbol for 4 terminals		ADFN 2,5/4 GELB	04.343.8353.8	10	ADFN 2,5/4 GELB	04.343.8353.8	10
8. Test adapter modular		PS WKC/F	Z1.299.9753.0	10	PS WKC/F	Z1.299.9753.0	10
9. Test plug		ST 2/2,3	Z5.553.2921.0	10	ST 2/2,3	Z5.553.2921.0	10
10. Screwdriver, uninsulated		DIN 5264 B 0,6x3,5	06.502.4000.0	5	DIN 5264 B 0,6x3,5	06.502.4000.0	5
Screwdriver, uninsulated, MINI		DIN 5264 B 0,6x3,5 M	06.502.5000.0	10	DIN 5264 B 0,6x3,5 M	06.502.5000.0	10
Marking accessories see page 76–79							

Subject to change without further notice


fasis


Fuse blocks
with tension spring connection
fasis

[1] When selecting G fuse inserts, make sure that the specified maximum power is not exceeded. The current is determined by the inserted fuse.
[2] The voltage range is determined by the built-in LED display.
Depending on the application and the installation method, the circumstances for increased temperature must be checked in the closed fuse holders.

Higher ambient temperatures are an additional load for the fuse inserts. Therefore, the reduction of the rated current must be considered accordingly in these applications.

Indicator (24 V): LED, red
current consumption: 10.3 mA
Indicator (220 V): LED, red
current consumption: 0.3 mA

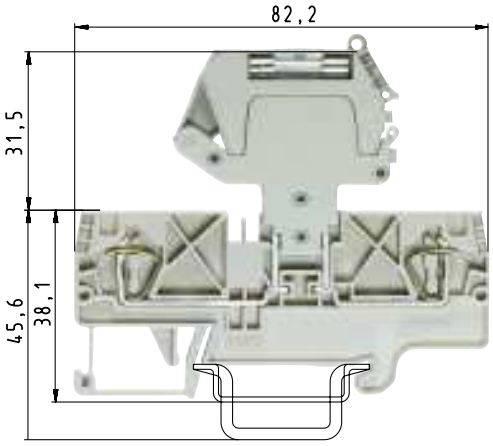

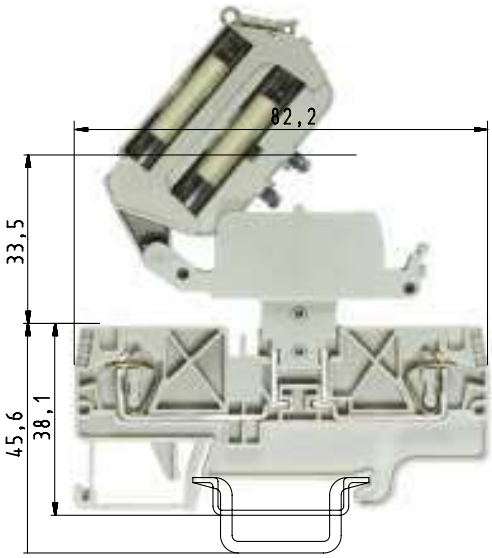

EN 60 947-7-3:2002
UL ratings field/factory wiring
CSA ratings
KEMA 01 ATEX 2087 U[1] EN 60 079-0/EN 60 079-7
Width Wire strip length
Approvals

WKFN 4 TKG with THSi 5 x 20

fine-stranded 0.13–4 mm² | solid 0.13–6 mm² | V 500 V/8 kV/3 | A [1]
6 mm | 11 mm
pending

WKFN 4 TKG with THSi 6,3 x 32


fine-stranded 0.13–4 mm² | solid 0.13–6 mm² | V 500 V/8 kV/3 | A [1]
6 mm | 11 mm
pending



		Type	Part No.	Std. Pack	Type	Part No.	Std. Pack
Disconnect ground block	gray	WKFN 4 TKG/35	56.704.4055.0	100	WKFN 4 TKG/35	56.704.4055.0	100
Fuse disconnect lever		THSI 5x20	Z1.298.1053.0	10	THSI 6,3x32	Z1.298.1653.0	10
Fuse disconnect lever with LED 12–24 V[2]		THSI 5x20 LED24	Z1.298.1153.0	10	THSI 6,3x32 LED24	Z1.298.1753.0	10
Fuse disconnect lever with LED 24–60 V[2]		THSI 5x20 LED60	Z1.298.1253.0	10	THSI 6,3x32 LED60	Z1.298.1853.0	10
Fuse disconnect lever with GL 110–250 V[2]		THSI 5x20 GL250	Z1.298.1353.0	10	THSI 6,3x32 GL250	Z1.298.1953.0	10
Fuse disconnect lever with GL 500 V[2]					THSI 6,3x32 GL500	Z1.298.2053.0	10
Supply block	gray						
Accessories							
1. Mounting rail 35, 7.5 mm high	L = 2 m	35x27x7,5 EN 60715	98.300.0000.0	1	35x27x7,5 EN 60715	98.300.0000.0	1
Mounting rail 35, 15 mm high	L = 2 m	35x24x15 EN 60715	98.360.0000.0	1	35x24x15 EN 60715	98.360.0000.0	1
2. End clamp TS 35, with screw	8 mm wide	9708/2 S35	Z5.522.8553.0	100	9708/2 S35	Z5.522.8553.0	100
End clamp TS 35, screwless	8 mm wide	WEF 1/35	Z5.523.9353.0	100	WEF 1/35	Z5.523.9353.0	100
3. End plate	gray	APFN 4 D2/2	07.312.9055.0	10	APFN 4 D2/2	07.312.9055.0	10
Intermediate plate, 4 mm wide	blue				ZP/WKFN 4 TKG	07.313.1655.0	10
4. Partition plate	gray	TWFN 4 D2/2	07.312.9155.0	10	TWFN 4 D2/2	07.312.9155.0	10
5. Cross connector	2 pole	IVB WKF 4-2	Z7.261.1227.0	10	IVB WKF 4-2	Z7.261.1227.0	10
insulated	3 pole	IVB WKF 4-3	Z7.261.1327.0	10	IVB WKF 4-3	Z7.261.1327.0	10
	4 pole	IVB WKF 4-4	Z7.261.1427.0	10	IVB WKF 4-4	Z7.261.1427.0	10
	5 pole	IVB WKF 4-5	Z7.261.1527.0	10	IVB WKF 4-5	Z7.261.1527.0	10
	6 pole	IVB WKF 4-6	Z7.261.1627.0	10	IVB WKF 4-6	Z7.261.1627.0	10
	7 pole	IVB WKF 4-7	Z7.261.1727.0	20	IVB WKF 4-7	Z7.261.1727.0	20
	8 pole	IVB WKF 4-8	Z7.261.1827.0	20	IVB WKF 4-8	Z7.261.1827.0	20
	9 pole	IVB WKF 4-9	Z7.261.1927.0	20	IVB WKF 4-9	Z7.261.1927.0	20
	10 pole	IVB WKF 4-10	Z7.261.2027.0	20	IVB WKF 4-10	Z7.261.2027.0	20
6. Wire entry guide	0.13–0.2 mm²	LEL 4/1 WEISS	05.561.8553.0	100	LEL 4/1 WEISS	05.561.8553.0	100
	0.25–0.5 mm²	LEL 4/2 GRAU	05.561.8653.0	100	LEL 4/2 GRAU	05.561.8653.0	100
	0.75–1.0 mm²	LEL 4/3 SCHWARZ	05.561.8753.0	100	LEL 4/3 SCHWARZ	05.561.8753.0	100
7. Cover with warning symbol over 4 blocks		ADF 4/4 GELB	04.343.6153.8	10	ADF 4/4 GELB	04.343.6153.8	10
8. Test plug		ST 2/2,3	Z5.553.2921.0	10	ST 2/2,3	Z5.553.2921.0	10
9. Screwdriver, uninsulated		DIN 5264 B 0,6x3,5	06.502.4000.0	5	DIN 5264 B 0,6x3,5	06.502.4000.0	5
Screwdriver, uninsulated, MINI		DIN 5264 B 0,6x3,5 M	06.502.5000.0	10	DIN 5264 B 0,6x3,5 M	06.502.5000.0	10
Marking accessories see page 76–79							

Subject to change without further notice

fasis

– Potential distribution with standard cross connector IVB WKF 4...
– Parallel connection of two cross connectors –> double jumpering
– Potential distributions are possible on one or both sides

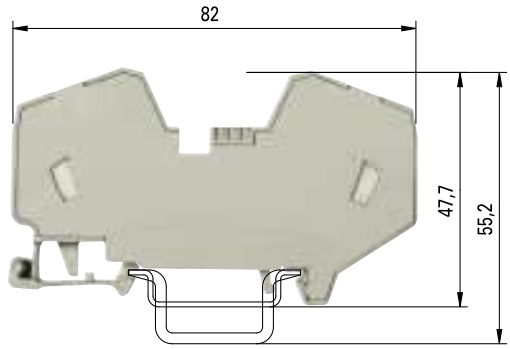

Potential distribution				
Jumpering	one side		both sides	
	single	double	single	double
I_{max}	64	76	76	76
I_{Nblock}	32	32	32	32

$$I_{max} = \sum I_n \leq \sum I_{Nblock}$$

WKF 16/35 PV/WKFN

fine-stranded	solid/stranded	V	A
4–16 mm²	4–16 mm²	800 V/8 kV/3	76
No. 24-4 AWG		600 V	75
No. 12-4 AWG		600 V	78
4–16 mm²	4–16 mm²	690 V	64*
12 mm			15 mm

GL SEV NV UL CSA ATEX

		Type	Part No.	Std. Pack
		WKF 16/35 PV/WKFN	56.716.0353.0	20
		35x27x7,5 EN 60715	98.300.0000.0	1
		35x24x15 EN 60715	98.360.0000.0	1
		9708/2 S35	Z5.522.8553.0	100
		WEF 1/35	Z5.523.9353.0	100
		IVB WKF 4–2	Z7.261.1227.0	10
		IVB WKF 4–3	Z7.261.1327.0	10
		IVB WKF 4–4	Z7.261.1427.0	10
		IVB WKF 4–5	Z7.261.1527.0	10
		IVB WKF 4–6	Z7.261.1627.0	10
		IVB WKF 4–7	Z7.261.1727.0	20
		IVB WKF 4–8	Z7.261.1827.0	20
		IVB WKF 4–9	Z7.261.1927.0	20
		IVB WKF 4–10	Z7.261.2027.0	20
		ADF 16/4 GELB	04.343.6653.8	10
		ST 2/2,3	Z5.553.2921.0	10
		DIN 5264 B 1,0x5,5	06.502.4200.0	5

* Type-specific output currents upon request

Fuse blocks
with tension spring connection
fasis

[1] When selecting G fuse inserts, make sure that the specified maximum power is not exceeded. The current is determined by the inserted fuse.


[2] The voltage range is determined by the built-in LED display. Depending on the application and the installation method, the conditions for temperature rise must be checked in the closed fuse holders. Higher ambient temperatures are an additional load for the fuse inserts. Therefore, the reduction of the rated current must be considered accordingly in these applications.


Indicator (24 V): LED, red
current consumption: 10.3 mA

Indicator (220 V): LED, red
current consumption: 0.3 mA

[3] Periodic peak voltage 1000 V
Direction of the diode: Anode / Cathode[5] — Cathode / Anode[6]

[4] The current load is determined by the component installed.

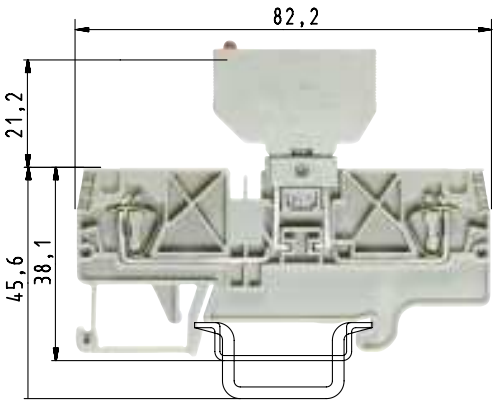

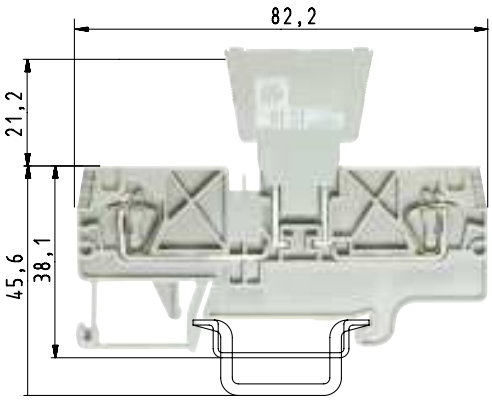

EN 60 947-7-3:2002
UL ratings — field/factory wiring
CSA ratings
KEMA 01 ATEX 2087 U[1] — EN 60 079-0/EN 60 079-7
Width — Wire strip length
Approvals

WKFN 4 TKG with SiST

fine-stranded 0.13–4 mm² | solid 0.13–6 mm² | V 500 V/8 kV/3[2] | A [1]

6 mm | 11 mm

pending

WKFN 4 TKG with DiST

fine-stranded 0.13–4 mm² | solid 0.13–6 mm² | V 500 V/8 kV/3[3] | A [4]

6 mm | 11 mm


pending



			Type	Part No.	Std. Pack	Type	Part No.	Std. Pack
Disconnect ground block		gray	WKFN 4 TKG/35	56.704.4055.0	100	WKFN 4 TKG/35	56.704.4055.0	100
Fuse holder for fuse 5 x 20		gray	Si ST	Z1.299.4055.0	10			
Fuse holder with indicator (24 V)		gray	Si ST LED	Z1.299.4155.0	10			
Fuse holder with indicator (220 V)		gray	Si ST GL	Z1.299.4255.0	10			
Diode plug – empty	J_{max} = 10 A[4]	gray				DIST ...	Z1.299.3055.0	10
Diode plug – diode	J_{max} = 1 A[4]	gray				DIST-1 N 4007-1[5]	Z1.299.3155.0	10
Diode plug – diode	J_{max} = 1 A[4]	gray				DIST-1 N 4007-2[6]	Z1.299.3355.0	10
Diode plug with jumper	J_{max} = 10 A[4]	gray				DIST-D	Z1.299.3255.0	10
Supply block		gray						
Accessories								
1. Mounting rail 35, 7.5 mm high	L = 2 m		35x27x7,5 EN 60715	98.300.0000.0	1	35x27x7,5 EN 60715	98.300.0000.0	1
Mounting rail 35, 15 mm high	L = 2 m		35x24x15 EN 60715	98.360.0000.0	1	35x24x15 EN 60715	98.360.0000.0	1
2. End clamp TS 35, with screw	8 mm wide		9708/2 S35	Z5.522.8553.0	100	9708/2 S35	Z5.522.8553.0	100
End clamp TS 35, screwless	8 mm wide		WEF 1/35	Z5.523.9353.0	100	WEF 1/35	Z5.523.9353.0	100
3. End plate		gray	APFN 4 D2/2	07.312.9055.0	10	APFN 4 D2/2	07.312.9055.0	10
4. Partition plate			TWFN 4 D2/2	07.312.9155.0	10	TWFN 4 D2/2	07.312.9155.0	10
5. Cross connector	2 pole		IVB WKF 4-2	Z7.261.1227.0	10	IVB WKF 4-2	Z7.261.1227.0	10
insulated	3 pole		IVB WKF 4-3	Z7.261.1327.0	10	IVB WKF 4-3	Z7.261.1327.0	10
	4 pole		IVB WKF 4-4	Z7.261.1427.0	10	IVB WKF 4-4	Z7.261.1427.0	10
	5 pole		IVB WKF 4-5	Z7.261.1527.0	10	IVB WKF 4-5	Z7.261.1527.0	10
	6 pole		IVB WKF 4-6	Z7.261.1627.0	10	IVB WKF 4-6	Z7.261.1627.0	10
	7 pole		IVB WKF 4-7	Z7.261.1727.0	20	IVB WKF 4-7	Z7.261.1727.0	20
	8 pole		IVB WKF 4-8	Z7.261.1827.0	20	IVB WKF 4-8	Z7.261.1827.0	20
	9 pole		IVB WKF 4-9	Z7.261.1927.0	20	IVB WKF 4-9	Z7.261.1927.0	20
	10 pole		IVB WKF 4-10	Z7.261.2027.0	20	IVB WKF 4-10	Z7.261.2027.0	20
6. Wire entry guide	0.13–0.2 mm²		LEL 4/1 WEISS	05.561.8553.0	100	LEL 4/1 WEISS	05.561.8553.0	100
	0.25–0.5 mm²		LEL 4/2 GRAU	05.561.8653.0	100	LEL 4/2 GRAU	05.561.8653.0	100
	0.75–1.0 mm²		LEL 4/3 SCHWARZ	05.561.8753.0	100	LEL 4/3 SCHWARZ	05.561.8753.0	100
7. Cover with warning symbol over 4 blocks			ADF 4/4 GELB	04.343.6153.8	10	ADF 4/4 GELB	04.343.6153.8	10
8. Test plug			ST 2/2,3	Z5.553.2921.0	10	ST 2/2,3	Z5.553.2921.0	10
9. Screwdriver, uninsulated			DIN 5264 B 0,6x3,5	06.502.4000.0	5	DIN 5264 B 0,6x3,5	06.502.4000.0	5
Screwdriver, uninsulated, MINI			DIN 5264 B 0,6x3,5 M	06.502.5000.0	10	DIN 5264 B 0,6x3,5 M	06.502.5000.0	10
Marking accessories see page 76–79								

Subject to change without further notice

fasis

– Potential distribution with standard cross connector IVB WKF 4...
– Parallel connection of two cross connectors –> double jumpering
– Potential distributions are possible on one or both sides

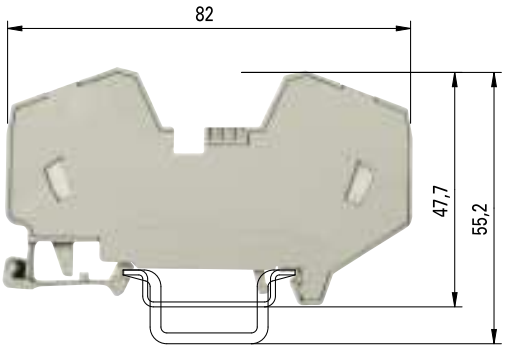

Potential distribution				
Jumpering	one side		both sides	
	single	double	single	double
I_{max}	64	76	76	76
I_{Nblock}	32	32	32	32

$$I_{max} = \sum I_n \leq \sum I_{Nblock}$$

WKF 16/35 PV/WKFN

fine-stranded	solid/stranded	V	A
4–16 mm²	4–16 mm²	800 V/8 kV/3	76
No. 24-4 AWG		600 V	75
No. 12-4 AWG		600 V	78
4–16 mm²	4–16 mm²	690 V	64*
12 mm			15 mm

GL SEV NV UL CSA ATEX

		Type	Part No.	Std. Pack
		WKF 16/35 PV/WKFN	56.716.0353.0	20
		35x27x7,5 EN 60715	98.300.0000.0	1
		35x24x15 EN 60715	98.360.0000.0	1
		9708/2 S35	Z5.522.8553.0	100
		WEF 1/35	Z5.523.9353.0	100
		IVB WKF 4–2	Z7.261.1227.0	10
		IVB WKF 4–3	Z7.261.1327.0	10
		IVB WKF 4–4	Z7.261.1427.0	10
		IVB WKF 4–5	Z7.261.1527.0	10
		IVB WKF 4–6	Z7.261.1627.0	10
		IVB WKF 4–7	Z7.261.1727.0	20
		IVB WKF 4–8	Z7.261.1827.0	20
		IVB WKF 4–9	Z7.261.1927.0	20
		IVB WKF 4–10	Z7.261.2027.0	20
		ADF 16/4 GELB	04.343.6653.8	10
		ST 2/2,3	Z5.553.2921.0	10
		DIN 5264 B 1,0x5,5	06.502.4200.0	5
		* Type-specific output currents upon request		

Initiator and actuator blocks with tension spring connection

fasis



For machine and system control wiring, practice-oriented solutions are preferred that are primarily economical and reliable and thus contribute to the system's operational and functional safety.

fasis KOI was designed to connect the great variety of initiators and actuators to central and remote control systems. The initiator and actuator blocks of type WKF 1,5 KOI have, in particular, been conceived for the requirements in machine and system engineering. They facilitate the wiring task through clearly arranged termination points and an easily accessible and operable tension spring technology.

fasis KOI is a compact and efficient wiring system for connection purposes, potential distribution and transmission of signals from initiators and actuators.



System advantages used

- Control-compatible system solutions through accurate tuning of the connection modules' number of poles to the input and output modules of the PLC.
- Flexible fixation through snap-on to the TS35 mounting rail or screw-on of the connection module to the base board.
- Application-specific individual terminal block as a link between initiators, actuators and the PLC.




Economically designed

- Low space requirements due to compact dimensioning of the individual terminal blocks and integration of the potential distribution inside the connection module.
- Efficient installation and start-up of the wiring system by simply fitting the connection module with components, which supersedes additional connection accessories.
- Reduction of the warehousing costs due to a low variety of parts without having to forego flexibility in the application.



Service-friendly operation

- Short maintenance times for modifications of the terminal block assembly by replacing or extending individual blocks without interrupting the power supply of the other initiator and actuator blocks.
- Immediate visual monitoring of the switching states due to integrated light-emitting diodes.
- No maintenance required due to a permanently safe and dynamic terminal block connection using spring clamp technology in a tension spring system.

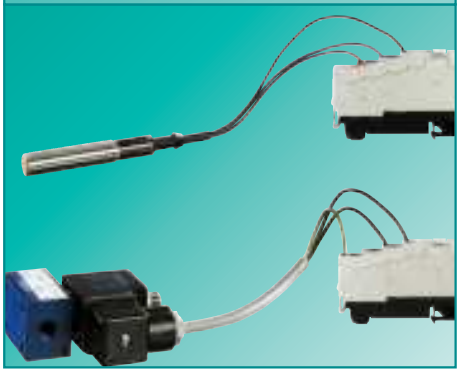

Application-related selection

- Power supply to the connection modules through supply blocks, alternatively with LEDs.
- Potential distribution through connection modules in designs for 9 (1+8) or 18 (2x(1+8)) terminal blocks.
- Initiator blocks, for example for the connection of 3-wire or 4-wire proximity or position switches, alternatively with LEDs.
- Actuator terminals, for example for the connection of magnetic valves.

Subject to change without further notice

fasis



Connection module

Collect and distribute potentials

- Potential distribution is achieved quickly and safely as soon as the terminal blocks are snapped on.
- Connection rails for the plus, minus and ground or screen potential are each integrated in the connection modules.
- The system does not require any additional cross connectors.



Cover for connection modules

Collect and distribute potentials

- Unused terminal block locations can be closed with connection module covers and thus prevent accidental contact.
- The covers are delivered in 8 pole sets and can be separated individually as required.
- Protection against accidental contact according to IP20 is guaranteed when the covers are snapped on.



Wire entry guides

Connect „small cross sections“ safely


- Wire entry guides prevent the wires from being inserted too deeply (smaller than 1 mm^2) and enable an easy, professional and quick installation.
- Ensure the connection of solid and fine-stranded wires smaller than 1 mm^2.
- Also see the accessories for DIN rail terminal blocks on page 73!



Marking system

All clamping points marked clearly

- Marking tags easily readable even with the wires connected.
- Clear assignment of wire to the termination point while wiring.
- Simplified troubleshooting for servicing.
- Individual marking with the ***wiemarc*** and ***wieplot*** marking systems.

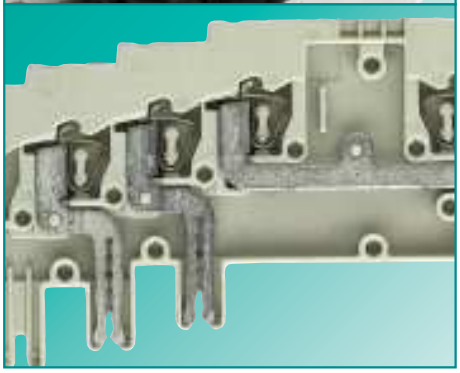


Materials


High-quality materials selected

- Special alloys enable low feed-through resistance and provide a gas-tight contact area:
  – clamping spring: stainless CrNi steel
  – current-carrying bar: tin-plated copper
- Polyamide has excellent electrical, chemical and mechanical characteristics:
  – temperature resistance: up to 120°C
  – creepage resistance: CTI 600
  – flammability class: self-extinguishing, UL94-V2


Initiator and actuator blocks with tension spring connection

fasis

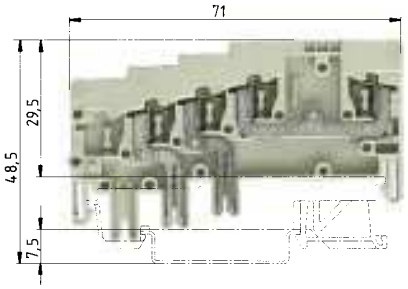


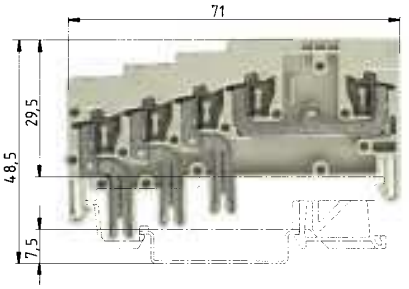


37.702.7453.0
* 65 V/1.5 kV/3




37.702.8453.0
* DC 24 V
same as picture, but with LED



37.702.7553.0
* 65 V/1.5 kV/3



37.702.8553.0
* DC 24 V
same as picture, but with LED




		WKF 1,5 KOI 3L...			**WKF 1,5 KOI 3L/SL...**		
		fine-stranded solid	V	A	fine-stranded solid	V	A
		0.13–1.5 mm² 0.13–1.5 mm²	*	10	0.13–1.5 mm² 0.13–1.5 mm²	*	10
EN 60 947-7-1/DIN VDE 0611 T1							
UL ratings	field/factory wiring	No. 28-16 AWG	65 V	10	No. 28-16 AWG	65 V	10
CSA ratings							
Width	Wire strip length	5 mm		10 mm	5 mm		10 mm
Approvals							


		Type	Part No.	Std. Pack	Type	Part No.	Std. Pack
Initiator block	gray	WKF 1,5 KOI 3L	37.702.7453.0	50			
Initiator block with LED (PNP)	gray	WKF 1,5 KOI 3L-PGE	37.702.8453.0	50			
Initiator block	gray				WKF 1,5 KOI 3L/SL	37.702.7553.0	50
Initiator block with LED (PNP)	black				WKF 1,5 KOI 3L/SL-PGE	37.702.8553.0	50
Supply block	black						
Supply block with LED	gray						
Actuator block	gray						
Actuator block with LED	gray						
Connection module for 9 blocks	black						
Connection module for 18 blocks	black						
Accessories							
1. Mounting rail 35, 7.5 mm high	L = 2 m	35x27x7,5 EN 60715	98.300.0000.0	1	35x27x7,5 EN 60715	98.300.0000.0	1
Mounting rail 35, 15 mm high	L = 2 m	35x24x15 EN 60715	98.360.0000.0	1	35x24x15 EN 60715	98.360.0000.0	1
2. End clamp TS 35, with screw	8 mm wide	9708/2 S35	Z5.522.8553.0	100	9708/2 S35	Z5.522.8553.0	100
End clamp TS 35, screwless	8 mm wide	WEF 1/35	Z5.523.9353.0	100	WEF 1/35	Z5.523.9353.0	100
3. End plate							
4. Partition plate							
5. Cross connector	2 pole						
insulated	3 pole						
	4 pole						
	5 pole						
	6 pole						
	7 pole						
	8 pole						
	9 pole						
	10 pole						
6. Wire entry guide	0.13–0.2 mm²	LEL 1,5/1 WEISS	05.562.2453.0	100	LEL 1,5/1 WEISS	05.562.2453.0	100
	0.25–0.5 mm²	LEL 1,5/2 GRAU	05.562.2553.0	100	LEL 1,5/2 GRAU	05.562.2553.0	100
	0.75–1.0 mm²	LEL 1,5/3 SCHWARZ	05.562.2653.0	100	LEL 1,5/3 SCHWARZ	05.562.2653.0	100
7. Cover for connection module							
8. Screwdriver, uninsulated		DIN 5264 B 0,6x3,5	06.502.4000.0	5	DIN 5264 B 0,6x3,5	06.502.4000.0	5
Marking accessories see page 76–79							

Subject to change without further notice


fasis

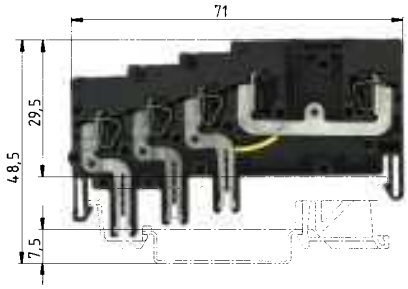


37.702.7753.0
* 65 V/1.5 kV/3




37.702.8753.0
* DC 24 V
same as picture,
but with LED




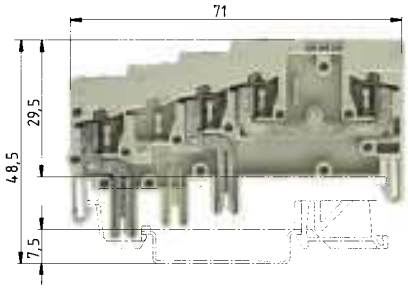


37.702.7653.0
* 65 V/1.5 kV/3



37.702.8653.0
* DC 24 V
same as picture,
but with LED



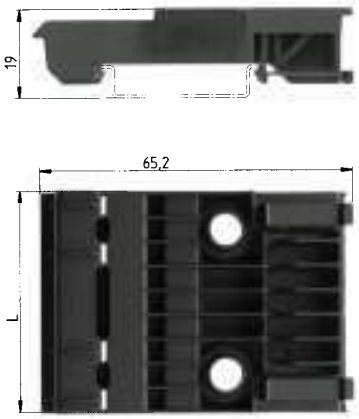

WKF 1,5 KOE...

fine-stranded	solid	V	A
0.13–1.5 mm²	0.13–1.5 mm²	*	10
No. 28-16 AWG		65 V	10

5 mm 10 mm

WKF 1,5 KOA 2L...

fine-stranded	solid	V	A
0.13–1.5 mm²	0.13–1.5 mm²	*	10
No. 28-16 AWG		65 V	10

5 mm 10 mm

VM WKF...

	V	A
	*	10
	65 V	10

9 pole module L = 9 x 5 mm + 1.5 mm
18 pole module L = 18 x 5 mm + 1.5 mm


Type	Part No.	Std. Pack
WKF 1,5 KOE	37.702.7753.0	50
WKF 1,5 KOE-PGN	37.702.8753.0	50
35x27x7,5 EN 60715	98.300.0000.0	1
35x24x15 EN 60715	98.360.0000.0	1
9708/2 S35	Z5.522.8553.0	100
WEF 1/35	Z5.523.9353.0	100
LEL 1,5/1 WEISS	05.562.2453.0	100
LEL 1,5/2 GRAU	05.562.2553.0	100
LEL 1,5/3 SCHWARZ	05.562.2653.0	100
DIN 5264 B 0,6x3,5	06.502.4000.0	5


Type	Part No.	Std. Pack
WKF 1,5 KOA 2L	37.702.7653.0	50
WKF 1,5 KOA 2L/SL-PGE	37.702.8653.0	50
35x27x7,5 EN 60715	98.300.0000.0	1
35x24x15 EN 60715	98.360.0000.0	1
9708/2 S35	Z5.522.8553.0	100
WEF 1/35	Z5.523.9353.0	100
LEL 1,5/1 WEISS	05.562.2453.0	100
LEL 1,5/2 GRAU	05.562.2553.0	100
LEL 1,5/3 SCHWARZ	05.562.2653.0	100
DIN 5264 B 0,6x3,5	06.502.4000.0	5

Type	Part No.	Std. Pack
VM WKF K0..9	69.700.0953.0	10
VM WKF K0..18	69.700.1853.0	5
35x27x7,5 EN 60715	98.300.0000.0	1
35x24x15 EN 60715	98.360.0000.0	1
9708/2 S35	Z5.522.8553.0	100
WEF 1/35	Z5.523.9353.0	100
AD VM-1,5/8 SCHWARZ	04.343.8053.0	10


DIN rail terminal blocks with tension spring and pluggable connections


fasis

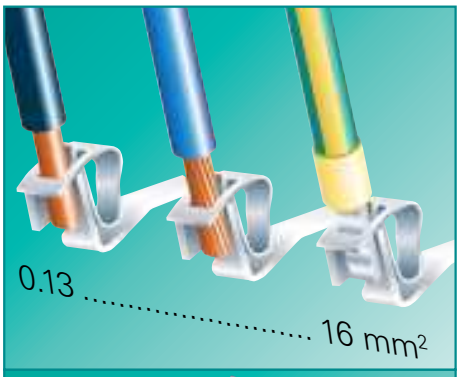

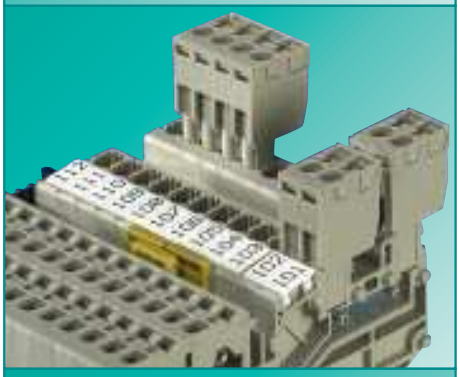



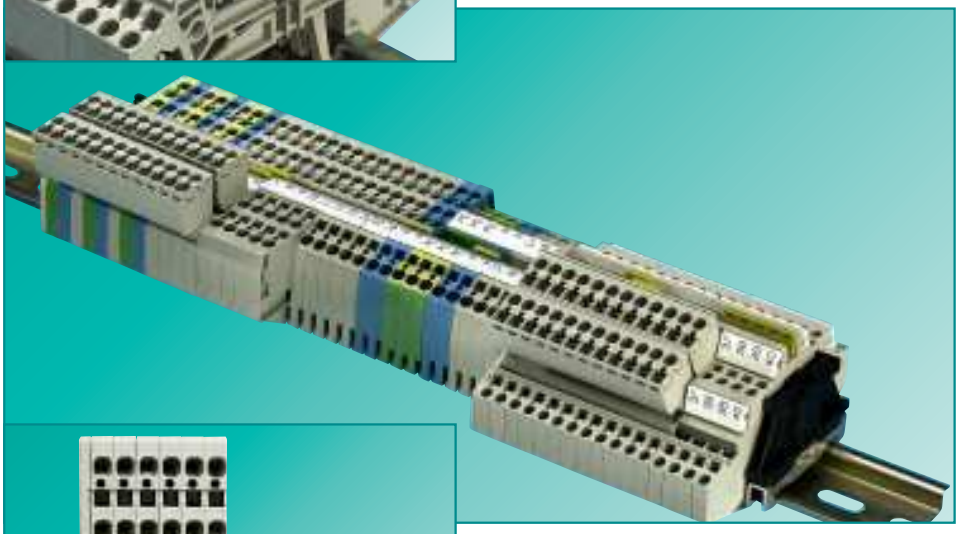

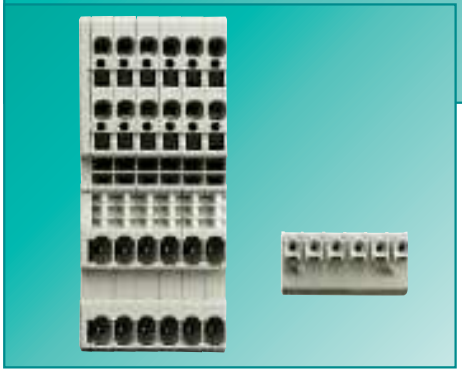

System advantages

❒ **Spring clamp technology**
with tension spring connection

Separation of electrical and mechanical functions

❒ **TOP connection**
Wire entry and screwdriver access in same plane

❒ **Built-in test points**

❒ **Pre-assembled modules**

❒ **Pluggable wiring inside the control cabinet**

❒ Two versions of DIN rail terminal blocks:

❒ Protected against accidental contact

❒ Safety through coding

Application advantages

→ **Dynamic connections**
Protection of the connection against "cold flow" and creepage

→ **Pre-programmed clamping force**
The clamping force required to connect the wire, is created by the spring elements of the clamp

→ **Durable and maintenance-free electrical connection**
according to EN 60947-7-1

→ **Clear wiring**
In small confined spaces

→ **Test points for test plugs** up to Ø 2.3 mm on all clamping points, without having to remove the connected wire

→ **Reduced downtime** due to quick and easy component replacement

→ **Wiring errors reduced to a minimum**

→ **Cost reduction** in assembly on site

→ **Time saving due to pluggable accessories**

→ **Flexible potential distribution**
through terminal strip

→ WKF 2.5/D2/8113... with 2 inputs and 2 outputs on one potential, only 5 mm wide


→ WKF 2.5 E/8113/35 with 2 input and 2 outputs with different potentials in double-tier design

→ Dead front safety as per IEC 60529 due to shrouded pins on the plug side

→ Coding pieces prevent incorrect mating of the pluggable connector

Subject to change without further notice

fasis

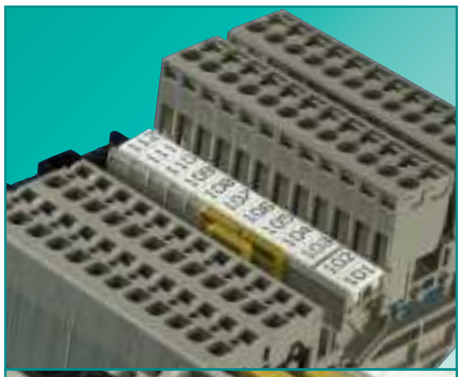









Cross connection

- ❒ Jumpering with insulated cross connector IVB WKF 2.5...
- ❒ Two-channel system inside the terminal strip enables chained jumpering through cross connectors
- ❒ No partition plates required between adjacent cross connectors
- ❒ Cross connectors IVB WKF 2.5... can be loaded with the rated current

Wire entry guides

- ❒ For the connection of wires with cross sections smaller than 18 AWG we recommend the use of wire entry guides

  Wire entry guides prevent the wires from being inserted beyond the optimal clamping point and ensure a safe and secure connection

Marking accessories

- ❒ Single marking tag in 5 mm spacing
- ❒ Marking strips (10 tags) to snap on to the terminal blocks
- ❒ Tear-off marking strips for 3-digit marking options per block
- ❒ Custom marking upon request

Cover with warning symbol

- ❒ Cover with warning symbol ADF to snap on to blocks that remain live when the main switch is disconnected (VDE 0113)
- ❒ Cover for spring-loaded termination point ADF 2.5/4 GELB
- ❒ Cover for PCB connection ADF 8113/10 GELB
- ❒ Cover can only be removed with a screwdriver

DQS certificates for all products

- ❒ Quality standard as per DIN ISO 9001
- ❒ in Development, Production, Assembly
- ❒ Continued control of the quality standard by means of regular internal and external quality audits
- ❒ Compatible with certificates of other countries:
  – BSI Certificate, Great Britain
  – SQS Certificate, Switzerland
  – Aib-Vincotte Certificate, Belgium
  – ÖQS Certificate, Austria

Material

❒ Metal parts

Special alloys and surface treatments provide low contact resistance and high corrosion resistance

Clamping spring: stainless CrNi steel

Busbar: tin-plated cooper

❒ Insulating material

Polyamide has excellent electrical, chemical and mechanical characteristics

Insulating housing: Polyamide 66/6

Tracking resistance: CTI 600

Flammability class: UL 94 V-0

(see also AT catalog section ***facts*** & DATA)

Our ***wieplan*** software helps to plan your DIN rail terminal block assemblies (see AT catalog page 36/37).

Note

The information regarding cross-sectional areas and connection types pertains to wires without ferrules. Ferrules are not neccessary for secure connection.


The voltage ratings apply to the terminals in their intended application. When different products are mounted adjacent to each other, the proper isolation distances must be adhered to. For this purpose, **Wieland** offers a large selection of appopriate accessories.


A detailed description of technical data, the standards requirements, and the application conditions can be found in catalog section ***facts*** & DATA.

Subject to change without further notice

DIN rail terminal blocks with tension spring and pluggable connections

fasis

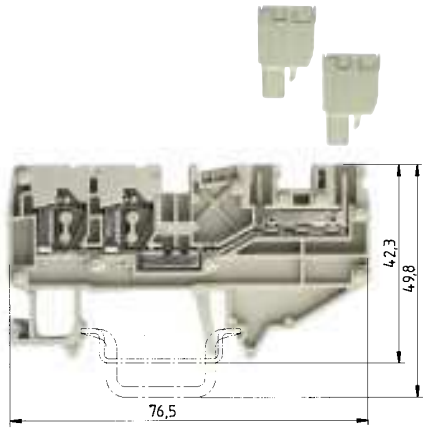

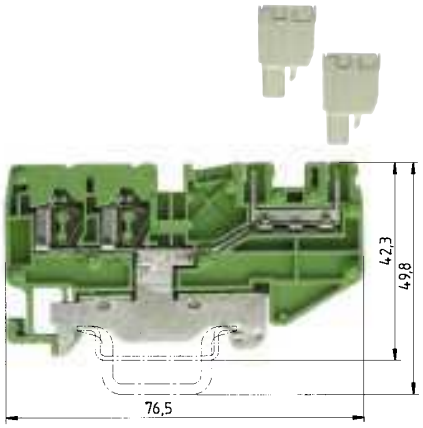

WKF 2,5 D2/8113/35

	fine-stranded	solid	V	A
EN 60 947-7-1/DIN VDE 0611 T1	0.13–2.5 mm²	0.13–4 mm²	250 V/4 kV/3	16
UL ratings	No. 22-12 AWG		300 V	15
CSA ratings	No. 24-12 AWG		300 V	15
Width	5 mm			
Approvals				

Wire strip length: 11 mm

WKF 2,5 D2/8113/SL/35

	fine-stranded	solid	V	A
EN 60 947-7-1/DIN VDE 0611 T1	0.13–2.5 mm²	0.13–4 mm²	250 V/4 kV/3	16
UL ratings	No. 22-12 AWG		300 V	
CSA ratings	No. 24-12 AWG		300 V	
Width	5 mm			
Approvals				

Wire strip length: 11 mm

		Type	Part No.	Std. Pack	Type	Part No.	Std. Pack
Duo feed-through block	gray	WKF 2,5 D2/8113/35	56.703.2053.0	100			
	blue	WKF 2,5 D2/8113/35 BLAU	56.703.2053.6	100			
Duo ground block	yellow/green				WKF 2,5 D2/8113 SL/35	56.703.9253.0	100
Multi-tier block	gray						
Accessories							
1. Mounting rail 35, 7.5 mm high	L = 2 m	35x27x7,5 EN 60715	98.300.0000.0	1	35x27x7,5 EN 60715	98.300.0000.0	1
Mounting rail 35, 15 mm high	L = 2 m	35x24x15 EN 60715	98.360.0000.0	1	35x24x15 EN 60715	98.360.0000.0	1
2. End clamp TS 35, with screw	8 mm wide	9708/2 S35	Z5.522.8553.0	100	9708/2 S35	Z5.522.8553.0	100
End clamp TS 35, screwless	8 mm wide	WEF 1/35	Z5.523.9353.0	100	WEF 1/35	Z5.523.9353.0	100
3. End plate	gray	APF 2,5/D2/8113	07.312.4153.0	10	APF 2,5/D2/8113	07.312.4153.0	10
	blue	APF 2,5/D2/8113	07.312.4153.6	10			
4. Partition plate	gray						
	blue						
5. Cross connector	2 pole	IVB WKF 2,5–2	Z7.280.6227.0	10			
insulated	3 pole	IVB WKF 2,5–3	Z7.280.6327.0	10			
	4 pole	IVB WKF 2,5–4	Z7.280.6427.0	10			
	5 pole	IVB WKF 2,5–5	Z7.280.6527.0	10			
	6 pole	IVB WKF 2,5–6	Z7.280.6627.0	10			
	7 pole	IVB WKF 2,5–7	Z7.280.6727.0	20			
	8 pole	IVB WKF 2,5–8	Z7.280.6827.0	20			
	9 pole	IVB WKF 2,5–9	Z7.280.6927.0	20			
	10 pole	IVB WKF 2,5–10	Z7.280.7027.0	20			
6. Wire entry guide	0.13–0.2 mm²	LEL 2,5/1 WEISS	05.561.6553.0	100	LEL 2,5/1 WEISS	05.561.6553.0	100
	0.25–0.5 mm²	LEL 2,5/2 GRAU	05.561.6653.0	100	LEL 2,5/2 GRAU	05.561.6653.0	100
	0.75–1.0 mm²	LEL 2,5/3 SCHWARZ	05.561.6753.0	100	LEL 2,5/3 SCHWARZ	05.561.6753.0	100
7. Cover with warning symbol over 4 blocks		ADF 2,5/4 GELB	04.343.6053.8	10	ADF 2,5/4 GELB	04.343.6053.8	10
Cover with warning symbol over 4 poles		AD 8113/4 GELB	04.343.6853.8	10	AD 8113/4 GELB	04.343.6853.8	10
8. Screwdriver, uninsulated		DIN 5264 B 0,6x3,5	06.502.4000.0	5	DIN 5264 B 0,6x3,5	06.502.4000.0	5
9. Coding strip			05.561.0053.0	100		05.561.0053.0	100
Marking accessories see page 76–79							


Subject to change without further notice


fasis

wiecon PC board connector

Spring clamp/tension spring system

5 mm spacing **2.5 mm²**

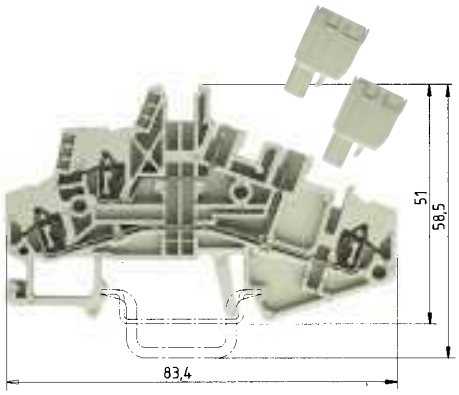

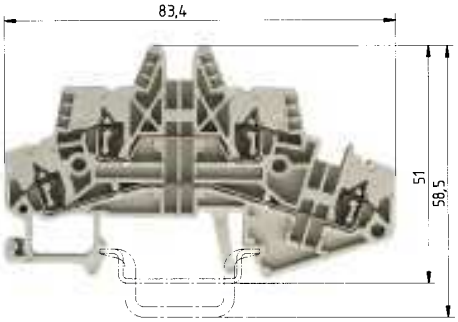





Rated voltages:
VDE 0110/01.89

250 V/4 kV/3 –
Overvoltage category III

400 V/4 kV/2 –
Overvoltage category II

1000 V/4 kV/1 –
Overvoltage category I





WKF 1,5 E/8113/35

fine-stranded	solid	V	A
0.13–1.5 mm²	0.13–2.5 mm²	250 V/4 kV/3	16
No. 22-14			
No. 24-14			

5 mm 8 mm

WKF 1,5 E/35

fine-stranded	solid	V	A
0.13–1.5 mm²	0.13–2.5 mm²	400 V/6 kV/3	17,5
No. 30-14 AWG		300 V	15 A
No. 30-14 AWG		600 V	15 A

5 mm 8 mm

Typ 8113 BFK

fine-stranded	solid	V	A
0.13–2.5 mm²	0.13–4 mm²		12
No. 22-12 AWG		300 V	12 A

5 mm 9 mm

Type	Part No.	Std. Pack	Type	Part No.	Std. Pack	Std. Pack	G	T	Pole	Part No.
						5 mm spacing				unmarked
						100	10,00	5,00	2	25.920.3253.0
						100	15,00	10,00	3	25.920.3353.0
WKF 1,5 E/8113/35	56.702.2053.0	100	WKF 1,5 E/35	56.702.7053.0	100	50	20,00	15,00	4	25.920.3453.0
						50	25,00	20,00	5	25.920.3553.0
						50	30,00	25,00	6	25.920.3653.0
35x27x7,5 EN 60715	98.300.0000.0	1	35x27x7,5 EN 60715	98.300.0000.0	1	50	35,00	30,00	7	25.920.3753.0
35x24x15 EN 60715	98.360.0000.0	1	35x24x15 EN 60715	98.360.0000.0	1	50	40,00	35,00	8	25.920.3853.0
9708/2 S35	Z5.522.8553.0	100	9708/2 S35	Z5.522.8553.0	100	50	45,00	40,00	9	25.920.3953.0
WEF 1/35	Z5.523.9353.0	100	WEF 1/35	Z5.523.9353.0	100	50	50,00	45,00	10	25.920.4053.0
APF 1,5/E/8113	07.312.4753.0	10	APF 1,5 E	07.312.3553.0	10	50	55,00	50,00	11	25.920.4153.0
						50	60,00	55,00	12	25.920.4253.0
			TWF 1,5 E	07.312.3653.0	10	50	65,00	60,00	13	25.920.4353.0
						50	70,00	65,00	14	25.920.4453.0
IVB WKF 2,5–2	Z7.280.6227.0	10	IVB WKF 2,5–2	Z7.280.6227.0	10	50	75,00	70,00	15	25.920.4553.0
IVB WKF 2,5–3	Z7.280.6327.0	10	IVB WKF 2,5–3	Z7.280.6327.0	10	50	80,00	75,00	16	25.920.4653.0
IVB WKF 2,5–4	Z7.280.6427.0	10	IVB WKF 2,5–4	Z7.280.6427.0	10					marked
IVB WKF 2,5–5	Z7.280.6527.0	10	IVB WKF 2,5–5	Z7.280.6527.0	10	100	10,00	5,00	2	25.920.0253.0
IVB WKF 2,5–6	Z7.280.6627.0	10	IVB WKF 2,5–6	Z7.280.6627.0	10	100	15,00	10,00	3	25.920.0353.0
IVB WKF 2,5–7	Z7.280.6727.0	20	IVB WKF 2,5–7	Z7.280.6727.0	20	50	20,00	15,00	4	25.920.0453.0
IVB WKF 2,5–8	Z7.280.6827.0	20	IVB WKF 2,5–8	Z7.280.6827.0	20	50	25,00	20,00	5	25.920.0553.0
IVB WKF 2,5–9	Z7.280.6927.0	20	IVB WKF 2,5–9	Z7.280.6927.0	20	50	30,00	25,00	6	25.920.0653.0
IVB WKF 2,5–10	Z7.280.7027.0	20	IVB WKF 2,5–10	Z7.280.7027.0	20	50	35,00	30,00	7	25.920.0753.0
LEL 1,5/1 WEISS	05.562.2453.0	100	LEL 1,5/1 WEISS	05.562.2453.0	100	50	40,00	35,00	8	25.920.0853.0
LEL 1,5/2 GRAU	05.562.2553.0	100	LEL 1,5/2 GRAU	05.562.2553.0	100	50	45,00	40,00	9	25.920.0953.0
LEL 1,5/3 SCHWARZ	05.562.2653.0	100	LEL 1,5/3 SCHWARZ	05.562.2653.0	100	50	50,00	45,00	10	25.920.1053.0
ADF 1,5/4 GELB	04.343.8353.8	10	ADF 1,5/4 GELB	04.343.8353.8	10	50	55,00	50,00	11	25.920.1153.0
AD 8113/4 GELB	04.343.6853.8	10	DIN 5264 B 0,6x3,5	06.502.4000.0	5	50	60,00	55,00	12	25.920.1253.0
DIN 5264 B 0,6x3,5	06.502.4000.0	5	DIN 5264 B 0,6x3,5 M	06.502.5000.0	10	50	65,00	60,00	13	25.920.1353.0
	05.561.0053.0	100				50	70,00	65,00	14	25.920.1453.0
						50	75,00	70,00	15	25.920.1553.0
						50	80,00	75,00	16	25.920.1653.0
						17- to 24- pole configurations upon request				
						Accessories: coding piece				05.561.9153.0

Motor connection block with tension spring connection

fasis



We have designed the motor connection block for a practice-oriented wiring of three-phase field devices. This is especially exhibited in the dimensioning of the rated values such as the high rated voltage of 800 V (EN 60947-7).

The connector can therefore also be used in 690 V networks, for example as connector for activating generators or AC motors up to 15 kW.

For the 4 wiring tiers of the motor connection block (3 feed-through potentials and one ground connection) the space requirements on the mounting rail are reduced to only 6 mm.

The motor connection block is a “space saver” providing you with many connection options.

mark

Clear marking of all clamping points

Benefits:

- Group marking in the center of the block is possible
- Clear assignment of wire to termination point on wiring
- Individual marking with the ***wiemarc*** marking system

clamp

Flexible and universal connecting

Benefits:

- Connection of solid, stranded and fine-stranded wires between 0.13 and 6 mm^2
- Connection of fine-stranded wires with ferrule between 0.5 and 4 mm^2

save

Use and save

Benefits:

- Snap on and the ground connection to the mounting rail is made
- Compact: 6 mm required on the mounting rail for one motor
- Design: closed insulated housing, no accessories

test


Measuring voltage with an integrated testing facility

Benefits:

- Testing at full wiring
- Testing directly at the current carrying bar

Subject to change without further notice

fasis

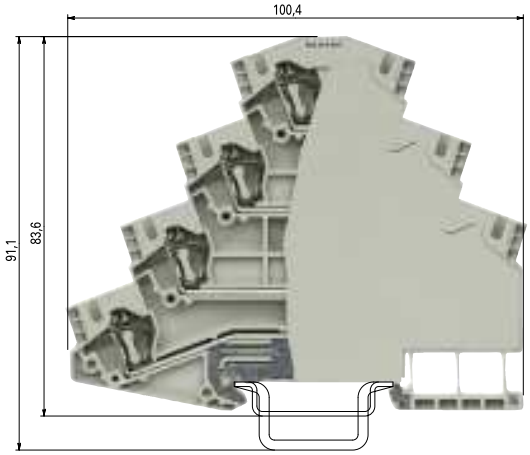

WKF 4 3D/SL

		fine-stranded	solid	V	A
		0.13–4 mm²	0.13–6 mm²	800 V/8 kV/3	28
EN 60 947-7-1/DIN VDE 0611 T1					
UL ratings	field/factory wiring	No. 28-10 AWG		600 V	30
CSA ratings					
Width	Wire strip length	6 mm			10 mm
Approvals					

		Type	Part No.	Std. Pack
Motor connection block	gray	WKF 4 3D/SL	56.704.8453.0	50
Accessories				
1. Mounting rail 35, 7.5 mm high	L = 2 m	35x27x7,5 EN 60715	98.300.0000.0	1
Mounting rail 35, 15 mm high	L = 2 m	35x24x15 EN 60715	98.360.0000.0	1
2. End clamp TS 35, with screw	8 mm wide	9708/2 S35	Z5.522.8553.0	100
End clamp TS 35, without screw	8 mm wide	WEF 1/35	Z5.523.9353.0	100
3. End plate	gray			
	blue			
4. Partition plate	gray			
	blue			
5. Cross connector	2 pole			
insulated	3 pole			
	4 pole			
	5 pole			
	6 pole			
	7 pole			
	8 pole			
	9 pole			
	10 pole			
6. Wire entry guide	0.13–0.2 mm²			
	0.25–0.5 mm²			
	0.75–1.0 mm²			
7. Cover with warning symbol over 4 blocks				
8. Test plug				
9. Screwdriver, uninsulated		DIN 5264 B 0,6x3,5	06.502.4000.0	5
Marking accessories see page 76–79				

DIN rail terminal blocks with tension spring connection

fasis MINI



With our DIN rail terminal block system ***fasis*** MINI we focus on the application's size and flexibility. ***fasis*** MINI is a range of DIN rail terminal blocks in tension spring technology designed for installation in confined spaces.

The portfolio comprises ground blocks and feed-through blocks in various colors with 2 or 4 connections per potential.

The potential in the WKFM 2,5 terminal block series can be distributed, modified and extended quickly, flexibly and without problem by using cross connectors.

For installation on TS 35 and TS 15 mounting rails, on mounting boards or inside universal terminal boxes we provide various designs with latching foot, latching pin or screw flange.



Solutions for applications in confined spaces

- Space-saving miniature terminal blocks in many designs for installation inside universal terminal boxes, motors and applications with low space requirements.
- Easy wiring through user-friendly entry guides for screwdrivers from the top.
- Marking tags easily readable even with the wires connected.
- Individual planning and marking using ***wieplan*** and ***wiemarc.***



Application-related selection

- Miniature terminal blocks with latching foot for direct installation on the mounting board.
- Miniature terminal blocks with flange for direct screw fixation on the mounting board.
- Miniature terminal blocks for installation on TS 15 or TS 35 mounting rails.



Combined individually

- DIN rail terminal blocks of the ***fasis*** MINI series are available in 2 and 4 pole configurations.
- ***fasis*** MINI blocks can be chained individually even without mounting rails by using the integrated latching pins.
- The various potentials and terminal blocks are visually distinguished by various color variations.
- Individual marking using marking tags or customized printing of the terminal blocks.





Permanent electrical connection

- The tension spring system provides a dynamic clamping connection. Load-controlled and thermal cold flow properties of the connected wires are balanced.
- Maintenance-free and gas-tight electrical connection as specified by the approvals. Customized layouts can be created individually.
- Separation of electrical and mechanical functions.

Subject to change without further notice

fasis





0344 ⟨Ex⟩ II 2GD
Ex e II
EN 60 947-7-1
UL ratings field/factory wiring
CSA ratings
KEMA 03 ATEX 2071 U[1] EN 60079-0/EN 60079-7
Width Wire strip length
Approvals

WKMF 2,5/15

fine-stranded	solid	V	A
0.13–2.5 mm²	0.13–2.5 mm²	500 V/6 kV/3	24
No. 26-12	AWG	600 V	20
No. 26-12	AWG	300 V	20
0.5–2.5 mm²	0.5–2.5 mm²	275 V*)	19/20[2]
5 mm			10 mm

ATEX cULus CSA

WKMF 2,5 SL/15

fine-stranded	solid	V	A
0.13–2.5 mm²	0.13–2.5 mm²	500 V/6kV/3[4]	[3]
No. 26-12	AWG	600 V	
No. 26-12	AWG	300 V	
0.5–2.5 mm²	0.5–2.5 mm²	*)	
5 mm			10 mm


ATEX cULus CSA

			Type	Part No.	Std. Pack	Type	Part No.	Std. Pack
Feed-through block		gray	WKMF 2,5/15	55.703.0053.0	100			
Feed-through block		blue	WKMF 2,5/15	55.703.0053.6	100			
Ground block		green/yellow				WKMF 2,5 SL/15	55.703.9053.0	100
Accessories								
1. Mounting rail 15, 5.5 mm high		L = 2 m	9021/15x5,5 EN 50045	98.090.0015.0	10	9021/15x5,5 EN 50045	98.090.0015.0	10
2. End clamp TS 15, metal		7,5 mm wide	9222	Z5.522.5010.0	100	9222	Z5.522.5010.0	100
End clamp TS 15, polyamide		7,5 mm wide	9208 S 15	Z5.522.7553.0	100	9208 S 15	Z5.522.7553.0	100
3. End plate	1.5 mm wide	gray	APMF 2,5 /15	07.312.5953.0	10	APMF 2,5 /15	07.312.5953.0	10
	1.5 mm wide	blue						
	1.5 mm wide	green						
4. Partition plate	1.5 mm wide	gray						
	1.5 mm wide	blue						
5. Cross connector		2 pole	IVB WKMF 2,5–2	Z7.260.0229.0	10			
insulated		3 pole	IVB WKMF 2,5–3	Z7.260.0329.0	10			
		4 pole	IVB WKMF 2,5–4	Z7.260.0429.0	10			
		5 pole	IVB WKMF 2,5–5	Z7.260.0529.0	10			
		6 pole	IVB WKMF 2,5–6	Z7.260.0629.0	10			
		7 pole	IVB WKMF 2,5–7	Z7.260.0729.0	10			
		8 pole	IVB WKMF 2,5–8	Z7.260.0829.0	10			
		9 pole	IVB WKMF 2,5–9	Z7.260.0929.0	10			
		10 pole	IVB WKMF 2,5–10	Z7.260.1029.0	10			
		50 pole	IVB WKMF 2,5 M50	Z7.260.0029.0	10			
6. Wire entry guide		0.13–0.2 mm²						
		0.25–0.5 mm²						
		0.75–1.0 mm²						
7. Cover with warning symbol for 4 terminals								
8. Screwdriver, uninsulated			DIN 5264 B 0,6x3,5	06.502.4000.0	5	DIN 5264 B 0,6x3,5	06.502.4000.0	5
Screwdriver, uninsulated, MINI			DIN 5264 B 0,6x3,5 M	06.502.5000.0	10	DIN 5264 B 0,6x3,5 M	06.502.5000.0	10
Marking accessories see page 76–79								

*) For maintaining the proper isolation distances, the open side of feed-through or ground blocks as well as both sides of a jumper are to be covered by partitions.
[1] Please note the mounting instructions in AT catalog.
[2] with/without jumper
[3] For the current carrying capability of the mounting rail see AT catalog section ***facts*** & DATA.
[4] Ratings to adjacent feed-through blocks of the same series and size

Mini terminal blocks with tension spring connection

fasis MINI






WKF 2,5/M/F



WKF 2,5/M





WKF 2,5/MD/F



WKF 2,5/MD

WKF 2,5/M with flange

fine-stranded	solid	V	A
0.13–2.5 mm²	0.13–4 mm²	800 V	24

WKF 2,5/MD with flange

fine-stranded	solid	V	A
0.13–2.5 mm²	0.13–4 mm²	800 V	24


EN 60 947-7-1:2002
UL ratings — field/factory wiring
CSA ratings
Width — Wire strip length — 5 mm — 11 mm — 10 mm — 11 mm
Approvals

			Type	Part No.	Std. Pack	Type	Part No.	Std. Pack
Feed-through block unmarked		gray	WKF 2,5/M	37.703.0553.0	100			
Feed-through block unmarked		blue	WKF 2,5/M BLAU	37.703.0553.6	100			
Feed-through block unmarked		orange	WKF 2,5/M ORANGE	37.703.0553.9	100			
Feed-through block with flange		gray	WKF 2,5/M/F	39.703.0153.0	100			
Feed-through block with flange		blue	WKF 2,5/M/F BLAU	39.703.0153.6	100			
Feed-through block with flange		orange	WKF 2,5/M/F ORANGE	39.703.0153.9	100			
Duo feed-through block unmarked		gray				WKF 2,5/MD	37.703.1053.0	100
Duo feed-through block unmarked		blue				WKF 2,5/MD BLAU	37.703.1053.6	100
Duo feed-through block unmarked		orange				WKF 2,5/MD ORANGE	37.703.1053.9	100
Duo feed-through block with flange		gray				WKF 2,5/MD/F	39.703.0253.0	100
Duo feed-through block with flange		blue				WKF 2,5/MD/F BLAU	39.703.0253.6	100
Duo feed-through block with flange		orange				WKF 2,5/MD/F ORANGE	39.703.0253.9	100
Accessories								
1. End plate with flange on the right		gray	APF 2,5/M.../F/R	07.312.3153.0	10	APF 2,5/M.../F/R	07.312.3153.0	10
End plate with flange on the right		blue	APF 2,5/M.../F/R BLAU	07.312.3153.6	10	APF 2,5/M.../F/R BLAU	07.312.3153.6	10
End plate with flange on the right		orange	APF 2,5/M.../F/R ORANGE	07.312.3153.9	10	APF 2,5/M.../F/R ORANGE	07.312.3153.9	10
2. Wire entry guide		0.13–0.2 mm²	LEL 2,5/1 WEISS	05.561.6553.0	100	LEL 2,5/1 WEISS	05.561.6553.0	100
		0.25–0.5 mm²	LEL 2,5/2 GRAU	05.561.6653.0	100	LEL 2,5/2 GRAU	05.561.6653.0	100
		0.75–1.0 mm²	LEL 2,5/3 SCHWARZ	05.561.6753.0	100	LEL 2,5/3 SCHWARZ	05.561.6753.0	100
3. Cross connector, insulated		2 pole		05.902.3500.0	10		05.902.3500.0	10
4. Marking strip,	unmarked	(4 x 22 pcs.)		04.244.0053.0	5		04.244.0053.0	5
	marked	(1–11)		04.844.2053.0	5		04.844.2053.0	5
	marked	(12–55)		04.844.2153.0	5		04.844.2153.0	5
	marked	(56–99)		04.844.2253.0	5		04.844.2253.0	5
5. Screwdriver, uninsulated			DIN 5264 B 0,6 x 3,5	06.502.4000.0	5	DIN 5264 B 0,6 x 3,5	06.502.4000.0	5

Marking accessories see page 76–79


Subject to change without further notice

fasis





Mounting hole: Ø 3,5 mm
Plate thickness: 0,6–1,2 mm





Mounting hole: Ø 3,5 mm
Plate thickness: 0,6–1,2 mm

WKF 2,5/M/R with mounting foot

fine-stranded	solid	V	A
0.13–2.5 mm²	0.13–4 mm²	800 V	24

WKF 2,5/MD/R with mounting foot


fine-stranded	solid	V	A
0.13–2.5 mm²	0.13–4 mm²	800 V	24


EN 60 947-7-1:2002
UL ratings — field/factory wiring
CSA ratings
Width — Wire strip length — 5 mm — 11 mm — 10 mm — 11 mm
Approvals

			Type	Part No.	Std. Pack	Type	Part No.	Std. Pack
Feed-through block unmarked		gray	WKF 2,5/M/R	38.703.0553.0	100			
Feed-through block unmarked		blue	WKF 2,5/M/R BLAU	38.703.0553.6	100			
Feed-through block unmarked		orange	WKF 2,5/M/R ORANGE	38.703.0553.9	100			
Duo feed-through block unmarked		gray				WKF 2,5/MD/R	38.703.1053.0	100
Duo feed-through block unmarked		blue				WKF 2,5/MD/R BLAU	38.703.1053.6	100
Duo feed-through block unmarked		orange				WKF 2,5/MD/R ORANGE	38.703.1053.9	100
Accessories								
1. End plate		gray	APF 2,5/M...	07.312.2953.0	10	APF 2,5/M...	07.312.2953.0	10
End plate		blue	APF 2,5/M... BLAU	07.312.2953.6	10	APF 2,5/M... BLAU	07.312.2953.6	10
End plate		orange	APF 2,5/M... ORANGE	07.312.2953.9	10	APF 2,5/M... ORANGE	07.312.2953.9	10
2. Wire entry guide		0.13–0.2 mm²	LEL 2,5/1 WEISS	05.561.6553.0	100	LEL 2,5/1 WEISS	05.561.6553.0	100
		0.25–0.5 mm²	LEL 2,5/2 GRAU	05.561.6653.0	100	LEL 2,5/2 GRAU	05.561.6653.0	100
		0.75–1.0 mm²	LEL 2,5/3 SCHWARZ	05.561.6753.0	100	LEL 2,5/3 SCHWARZ	05.561.6753.0	100
3. Cross connector, insulated		2 pole		05.902.3500.0	10		05.902.3500.0	10
4. Marking strip,	unmarked	(4 x 22 pcs.)		04.244.0053.0	5		04.244.0053.0	5
	marked	(1–11)		04.844.2053.0	5		04.844.2053.0	5
	marked	(12–55)		04.844.2153.0	5		04.844.2153.0	5
	marked	(56–99)		04.844.2253.0	5		04.844.2253.0	5
5. Screwdriver, uninsulated			DIN 5264 B 0,6 x 3,5	06.502.4000.0	5	DIN 5264 B 0,6 x 3,5	06.502.4000.0	5

Mini terminal blocks with tension spring connection

fasis MINI

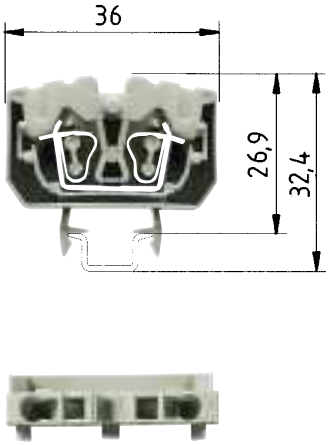

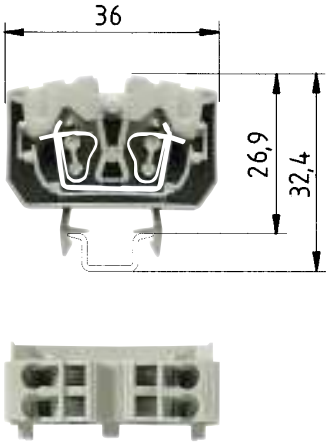

WKF 2,5/M/15

fine-stranded	solid	V	A
0.13–2.5 mm²	0.13–4 mm²	800 V	24

WKF 2,5/MD/15


fine-stranded	solid	V	A
0.13–2.5 mm²	0.13–4 mm²	800 V	24


EN 60 947-7-1:2002
UL ratings — field/factory wiring
CSA ratings
Width — Wire strip length — 5 mm — 11 mm — 10 mm — 11 mm
Approvals

			Type	Part No.	Std. Pack	Type	Part No.	Std. Pack
Feed-through block unmarked		gray	WKF 2,5/M/15	55.703.0553.0	100			
Feed-through block unmarked		blue	WKF 2,5/M/15 BLAU	55.703.0553.6	100			
Feed-through block unmarked		orange	WKF 2,5/M/15 ORANGE	55.703.0553.9	100			
Feed-through block unmarked		green	WKF 2,5/M/15 GRÜN	55.703.0553.7	100			
Duo feed-through block unmarked		gray				WKF 2,5/MD/15	55.703.1053.0	100
Duo feed-through block unmarked		blue				WKF 2,5/MD/15 BLAU	55.703.1053.6	100
Duo feed-through block unmarked		orange				WKF 2,5/MD/15 ORANGE	55.703.1053.9	100
Duo feed-through block unmarked		green				WKF 2,5/MD/15 GRÜN	55.703.1053.7	100
Zubehör								
1. Mounting rail 15,	5.5 mm high	L = 2 m	9021/15 x 5,5 EN 50045	98.090.0015.0	10	9021/15 x 5,5 EN 50045	98.090.0015.0	10
Mounting rail 35,	7.5 mm high	L = 2 m						
Mounting rail 35,	15 mm high	L = 2 m						
Mounting rail 35,	15 mm high	L = 2 m						
2. End clamp TS 15			9208 S15	Z5.522.7553.0	100	9208 S15	Z5.522.7553.0	100
End clamp TS 15, without screw								
3. End plate		gray	APF 2,5/M...	07.312.2953.0	10	APF 2,5/M...	07.312.2953.0	10
		blue	APF 2,5/M... BLAU	07.312.2953.6	10	APF 2,5/M... BLAU	07.312.2953.6	10
		orange	APF 2,5/M... ORANGE	07.312.2953.9	10	APF 2,5/M... ORANGE	07.312.2953.9	10
4. Wire entry guide		0.13–0.2 mm²	LEL 2,5/1 WEISS	05.561.6553.0	100	LEL 2,5/1 WEISS	05.561.6553.0	100
		0.25–0.5 mm²	LEL 2,5/2 GRAU	05.561.6653.0	100	LEL 2,5/2 GRAU	05.561.6653.0	100
		0.75–1.0 mm²	LEL 2,5/3 SCHWARZ	05.561.6753.0	100	LEL 2,5/3 SCHWARZ	05.561.6753.0	100
5. Cross connector, insulated		2 pole		05.902.3500.0	10		05.902.3500.0	10
6. Marking strip, unmarked		(4 x 22 pcs.)		04.244.0053.0	5		04.244.0053.0	5
marked		(1–11)		04.844.2053.0	5		04.844.2053.0	5
marked		(12–55)		04.844.2153.0	5		04.844.2153.0	5
marked		(56–99)		04.844.2253.0	5		04.844.2253.0	5
yellow, unmarked				04.244.0053.8	5		04.244.0053.8	5
7. Screwdriver, uninsulated			DIN 5264 B 0,6 x 3,5	06.502.4000.0	5	DIN 5264 B 0,6 x 3,5	06.502.4000.0	5
Marking accessories see page 76–79								

Subject to change without further notice

fasis

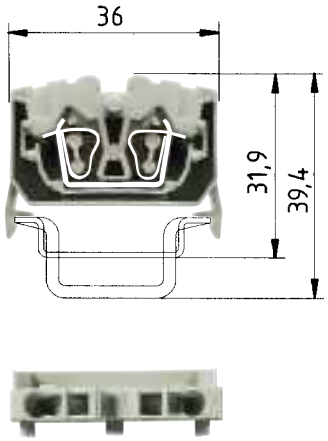

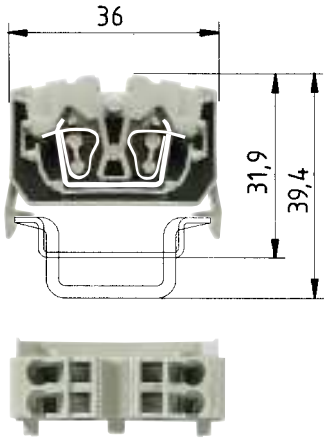

WKF 2,5/M/35

fine-stranded	solid	V	A
0.13–2.5 mm²	0.13–4 mm²	800 V	24

WKF 2,5/MD/35

fine-stranded	solid	V	A
0.13–2.5 mm²	0.13–4 mm²	800 V	24

EN 60 947-7-1:2002
UL ratings — field/factory wiring
CSA ratings
Width — Wire strip length — 5 mm — 11 mm — 10 mm — 11 mm
Approvals

			Type	Part No.	Std. Pack	Type	Part No.	Std. Pack
Feed-through block unmarked		gray	WKF 2,5/M/35	56.703.0553.0	100			
Feed-through block unmarked		blue	WKF 2,5/M/35 BLAU	56.703.0553.6	100			
Feed-through block unmarked		orange	WKF 2,5/M/35 ORANGE	56.703.0553.9	100			
Feed-through block unmarked		green	WKF 2,5/M/35 GRÜN	56.703.0553.7	100			
Duo feed-through block unmarked		gray				WKF 2,5/MD/35	56.703.1053.0	100
Duo feed-through block unmarked		blue				WKF 2,5/MD/35 BLAU	56.703.1053.6	100
Duo feed-through block unmarked		orange				WKF 2,5/MD/35 ORANGE	56.703.1053.9	100
Duo feed-through block unmarked		green				WKF 2,5/MD/35 GRÜN	56.703.1053.7	100
Zubehör								
1. Mounting rail 15,	5.5 mm high	L = 2 m						
Mounting rail 35,	7.5 mm high	L = 2 m	35x27x7,5 EN 60715	98.300.0000.0	1	35x27x7,5 EN 60715	98.300.0000.0	1
Mounting rail 35,	15 mm high	L = 2 m	35x24x15 EN 60715	98.360.0000.0	1	35x24x15 EN 60715	98.360.0000.0	1
Mounting rail 35,	15 mm high	L = 2 m	35x27x15	98.370.0000.0	1	35x27x15	98.370.0000.0	1
2. End clamp TS 15								
End clamp TS 15, without screw			WEF 1/35	Z5.523.9353.0	100	WEF 1/35	Z5.523.9353.0	100
3. End plate		gray	APF 2,5/M... GRAU	07.312.2953.0	10	APF 2,5/M... GRAU	07.312.2953.0	10
		blue	APF 2,5/M... BLAU	07.312.2953.6	10	APF 2,5/M... BLAU	07.312.2953.6	10
		orange	APF 2,5/M... ORANGE	07.312.2953.9	10	APF 2,5/M... ORANGE	07.312.2953.9	10
4. Wire entry guide		0.13–0.2 mm²	LEL 2,5/1 WEISS	05.561.6553.0	100	LEL 2,5/1 WEISS	05.561.6553.0	100
		0.25–0.5 mm²	LEL 2,5/2 GRAU	05.561.6653.0	100	LEL 2,5/2 GRAU	05.561.6653.0	100
		0.75–1.0 mm²	LEL 2,5/3 SCHWARZ	05.561.6753.0	100	LEL 2,5/3 SCHWARZ	05.561.6753.0	100
5. Cross connector, insulated		2 pole		05.902.3500.0	10		05.902.3500.0	10
6. Marking strip, unmarked		(4 x 22 pcs.)		04.244.0053.0	5		04.244.0053.0	5
marked		(1–11)		04.844.2053.0	5		04.844.2053.0	5
marked		(12–55)		04.844.2153.0	5		04.844.2153.0	5
marked		(56–99)		04.844.2253.0	5		04.844.2253.0	5
yellow, unmarked				04.244.0053.8	5		04.244.0053.8	5
7. Screwdriver, uninsulated			DIN 5264 B 0,6 x 3,5	06.502.4000.0	5	DIN 5264 B 0,6 x 3,5	06.502.4000.0	5

Accessories for DIN rail terminal blocks

fasis



Cross connector for feed-through blocks



Notching tool for cross connectors



Test plug with spring clamp connection

for WKF/WKC terminal blocks

PSWKC/F

solid	fine-stranded	V	A
0.13–1.5 mm²	0.13–1.5 mm²	400 V	13,5
*5 mm/6 mm			8 mm

Type	Part No.	Std. Pack
1.5 mm², 4 mm wide		
IVB WKF 1,5-2	Z7.260.0227.0	10
IVB WKF 1,5-3	Z7.268.0327.0	10
IVB WKF 1,5-4	Z7.268.0427.0	10
IVB WKF 1,5-5	Z7.268.0527.0	10
IVB WKF 1,5-10	Z7.268.1027.0	10
IVB WKF 1,5-20	Z7.268.2027.0	10
2.5 mm², 5 mm wide		
IVB WKF 2,5-2	Z7.280.6227.0	10
IVB WKF 2,5-3	Z7.280.6327.0	10
IVB WKF 2,5-4	Z7.280.6427.0	10
IVB WKF 2,5-5	Z7.280.6527.0	10
IVB WKF 2,5-6	Z7.280.6627.0	10
IVB WKF 2,5-7	Z7.280.6727.0	20
IVB WKF 2,5-8	Z7.280.6827.0	20
IVB WKF 2,5-9	Z7.280.6927.0	20
IVB WKF 2,5-10	Z7.280.7027.0	20
IVB WKF-V	Z7.261.1127.0	10
4 mm², 6 mm wide		
IVB WKF 4-2	Z7.261.1227.0	10
IVB WKF 4-3	Z7.261.1327.0	10
IVB WKF 4-4	Z7.261.1427.0	10
IVB WKF 4-5	Z7.261.1527.0	10
IVB WKF 4-6	Z7.261.1627.0	10
IVB WKF 4-7	Z7.261.1727.0	10
IVB WKF 4-8	Z7.261.1827.0	10
IVB WKF 4-9	Z7.261.1927.0	10
IVB WKF 4-10	Z7.261.2027.0	10
6 mm², 8 mm wide		
IVB WKFN 6-2	Z7.282.5227.0	10
IVB WKFN 6-5	Z7.282.5527.0	10
10 mm², 10 mm wide		
IVB WKF 10-2	Z7.283.8227.0	10
16 mm², 12 mm wide		
IVB WKF 16-2	Z7.284.4227.0	10
IVB WKF 16R10-2	Z7.284.4327.0	10
35 mm², 16 mm wide		
IVB WKF 35-2	Z7.285.6227.0	10
IVB WKF 35R10-2	Z7.285.6427.0	10
IVB WKF 35R16-2	Z7.285.6527.0	10

Type	Part No.	Std. Pack
1.5 mm², 4 mm wide		
AKW /A	95.300.0500.0	1
2.5 mm², 5 mm wide		
AKW /A	95.300.0500.0	1
Jumping cross connectors		
3 pole 1-3	99.013.9999.9	10
4 pole 1-4	99.014.9999.9	10
5 pole 1-5	99.015.9999.9	10
5 pole 1 to 3 to 5	99.031.9999.9	10
7 pole 1 to 3, 5 and 7	99.032.9999.9	10
9 pole; 1 to 3, 5, 7 and 9	99.033.9999.9	10
11 pole; 1 to 3, 5, 7, 9 u. 11	99.034.9999.9	10
Additional combinations upon request		10
4 mm², 6 mm wide		
AKW /A	95.300.0500.0	1

Please note the instructions for jumping cross connectors on page 11!

Type	Part No.	Std. Pack
2.5 mm², 5 mm wide		
Test plug PSWKC/F	Z1.299.9753.0	10
Blind piece	01.299.9753.0	10
End plate ZP/AP PS	07.312.6053.0	10
4 mm², 6 mm wide		
Test plug PSWKC/F	Z1.299.9753.0	10
Blind piece	01.299.9753.0	10
End plate ZP/AP PS	07.312.6053.0	10

* For 6 mm spacings a ZP/AP PS is snapped on behind each test plug or blind piece.

Subject to change without further notice

fasis



Cover with warning symbol over 4 blocks



Wire entry guides

for conductors with cross sections smaller than 1 mm²



Screwdrivers as operating tools


Type	Part No.	Std. Pack
1.5 mm², 4 mm wide		
ADF 1,5/5 GELB	04.343.6953.8	10
2.5 mm², 5 mm wide		
ADFN 2,5/4 GELB	04.343.8353.8	10
4 mm², 6 mm wide		
ADF 4/4 GELB	04.343.6153.8	10
6 mm², 8 mm wide		
ADF 6/4 GELB	04.343.6253.8	10
10 mm², 10 mm wide		
ADF 10/4 GELB	04.343.6453.8	10
16 mm², 12 mm wide		
ADF 16/4 GELB	04.343.6653.8	10
35 mm², 16 mm wide		
ADF 35/5 GELB	04.343.9253.8	10


Type	Part No.	Std. Pack
1.5 mm², 4 mm wide		
LEL 1,5/1 WEISS	05.564.4253.0	10
for 0.13–0.2 mm² wires		
LEL 1,5/2 GRAU	05.564.4253.0	10
for 0.25–0.5 mm² wires		
2.5 mm², 5 mm wide		
LELN 2,5/1 WEISS	05.564.3753.0	100
for 0.13–0.2 mm² wires		
LELN 2,5/1 GRAU	05.564.3853.0	100
for 0.25–0.5 mm² wires		
LELN 2,5/1 SCHWARZ	05.564.3953.0	100
for 0.75–1.0 mm² wires		
4 mm², 6 mm wide		
LEL 4/1 WEISS	05.561.8553.0	100
for 0.13–0.2 mm² wires		
LEL 4/2 GRAU	05.561.8653.0	100
for 0.25–0.5 mm² wires		
LEL 4/3 SCHWARZ	05.561.8753.0	100
for 0.75–1.0 mm² wires		

Type	Part No.	Std. Pack
1.5 mm², 4 mm wide		
Uninsulated, long and straight		
DIN 5264 B 0,4x2,5	06.502.4300.0	10
2.5 mm², 5 mm wide		
Uninsulated, long and straight		
DIN 5264 B 0,6x3,5	06.502.4000.0	10
Uninsulated, short and straight		
DIN 5264 B 0,6x3,5 M	06.502.5000.0	10
Uninsulated, long and angled		
DIN 5264 B 0,6x3,5 W	05.502.4100.0	10
Uninsulated, short and angled		
DIN 5264 B 0,6x3,5 MW	05.502.4000.0	10
4 mm², 6 mm wide		
Uninsulated, long and straight		
DIN 5264 B 0,6x3,5	06.502.4000.0	10
Uninsulated, short and straight		
DIN 5264 B 0,6x3,5 M	06.502.5000.0	10
Uninsulated, long and angled		
DIN 5264 B 0,6x3,5 W	05.502.4100.0	10
Uninsulated, short and angled		
DIN 5264 B 0,6x3,5 MW	05.502.4000.0	10
6 mm², 8 mm wide		
DIN 5264 B 0,6x4	06.502.4100.0	5
10 mm², 10 mm wide		
DIN 5264 B 0,6x4	06.502.4100.0	5
16 mm², 12 mm wide		
DIN 5264 B 1x5,5	06.502.4200.0	5
35 mm², 16 mm wide		
DIN 5264 B 1x5,5	06.502.4200.0	5

Mounting rails and end clamps for DIN rail terminal blocks

fasis

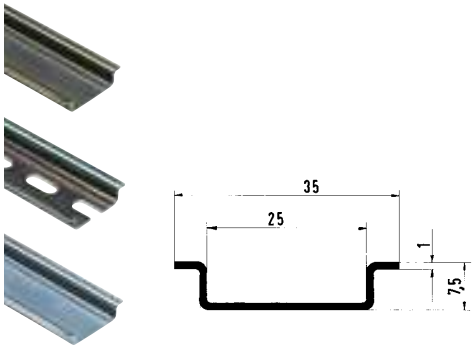

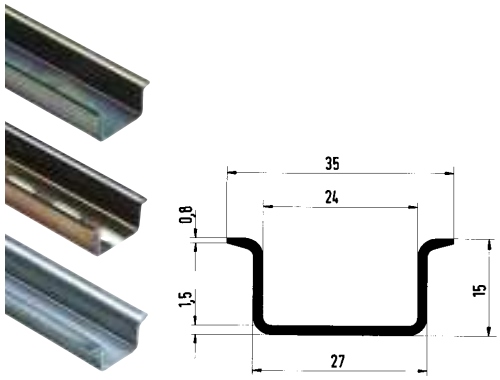


Mounting rail 35 x 7,5
according to DIN EN 60715


Mounting rail 35 x 15
according to DIN EN 60715

			Type	Part No.	Std. Pack	Type	Part No.	Std. Pack
Mounting rail								
1. Steel, galv. zinc-plated and dichromated,	unslotted	L = 2 m	35 x 27 x 7,5 EN 60715	98.300.0000.0	1	35 x 27 x 15 EN 60715	98.370.0000.0	1
Steel, galv. zinc-plated and dichromated,	slotted	L = 2 m	35 x 27 x 7,5 EN 60715 gelocht	98.300.1000.0	1	35 x 27 x 15 EN 60715	98.370.1000.0	1
2. Steel, unplated	unslotted	L = 2 m	35 x 27 x 7,5 EN 60715 blank	98.300.0010.0	1			
Steel, unplated	slotted	L = 2 m						
3. Steel, hot-galvanized	unslotted	L = 2 m						
Steel, hot-galvanized	slotted	L = 2 m						
4. E copper	unslotted	L = 2 m						
E copper	slotted	L = 2 m						
End clamp								
5. End clamp for TS 35, with screw		8 mm wide						
6. End clamp for TS 35, with screw		8/17,5 mm wide						
with marking facility								
for block assemblies								
7. End clamp for TS 35, screwless		5 mm wide						
End clamp for TS 35, screwless		8 mm wide						
8. End clamp for TS 35, screwless		8/17,5 mm wide						
with marking facility								
for block assemblies								
9. Marking tag with carrier								
10. Marking card in perforated sheets								
(1 sheet = 100 single tags)								

Subject to change without further notice

fasis









Mounting rail 35 x 15
according to DIN EN 60715

Type	Part No.	Std. Pack
35 x 27 x 15 EN 60715	98.360.0000.0	1
35 x 27 x 15 EN 60715 ZN	98.360.0004.0	1
35 x 27 x 15 EN 60715 CU	98.380.0000.0	10

End clamp for TS 35
screw mount

Type	Part No.	Std. Pack
9708/2 S 35	Z5.522.8553.0	100
9708/2 BS/35	69.920.0553.0	100
	04.019.0289.0	10

End clamp for TS 35
screwless mount

Type	Part No.	Std. Pack
WEF 2/35	Z5.523.9453.0	100
WEF 1/35	Z5.523.9353.0	100
WEF 1 BS/35	69.920.1053.0	100
BSIR	Z4.243.8453.0	100
	04.019.0289.0	10

Configuration and marking systems for DIN rail terminal blocks

fasis







Configuration software *wieplan*

Type	Part No.	Std. Pack
wieplan CD	95.502.1000.0	1

Contents:

CD with cover

Description:

wieplan is a software used to configure, document and order DIN rail terminal block assemblies. The intuitive user interface makes working with ***wieplan*** as easy as child's play.

wieplan enables data exchange through CAE systems:
– EPLAN 5
– EPLAN Electric P8

System requirements:

Pentium II PC or compatible, min. 200 MHz
64 Mbyte RAM
CD-ROM drive
VGA graphics adapter and monitor

wieplan supports:
Windows 98®
Windows 2000®
Windows NT®
Windows ME®
Windows XP®

Marking computer *marcom 2*

Type	Part No.	Std. Pack
marcom 2	95.502.0000.0	1

Contents:

Marking computer in case
European power supply unit
Power Pack
Data cassette with job memory
Marking tag carrier
Plotter pen, 0.25 mm
Cleaning set

Description:

wieland marcom 2 is a freely programmable marking computer for DIN rail terminal blocks, pluggable connectors, switching devices and cables. The computer provides of a large number of fonts, with numerical and alphanumerical characters and symbols. ***marcom 2*** is portable and can be used at any location; it can be operated either using the mains or batteries.

Technical data:

Operator panel:	190 mm x 45 mm
Resolution:	0.01 mm
Power supply unit:	50/60 Hz, 100–230 V
Output voltage:	9,5 V (150 mV/1.4 VA)
	14 V (450 mA/6.3 VA)
Replaceable battery:	16.8 V (14 NiCd-Zellen)
Dimensions:	380 mm x 190 mm x 63 mm
Weight:	6.2 kg

Marking software *wiemarc*

Type	Part No.	Std. Pack
wiemarc CD	95.502.0501.0	1

Contents:

CD with cover

Description

wiemarc is a Windows® based plotter software for customized marking using the ***wieplot*** 500. plotter system.
Both the Wieland standard marking system and marking tags and labels of other suppliers can be marked easily. The ***wiemarc*** software version 4.0 provides the option of connecting to the ***wieplot*** 500 E-UNIT engraving system.

System requirements:

Pentium II PC or compatible, min. 200 MHz
64 Mbyte RAM
CD-ROM drive
VGA graphics adapter and monitor

wieplan supports:
Windows 98®
Windows 2000®
Windows NT®
Windows ME®
Windows XP®

Subject to change without further notice

Marking system for DIN rail terminal blocks with spring clamp connection







Plotter system *wieplot* 500

Type	Part No.	Std. Pack
Complete package	95.502.0604.0	1

Contents:

Plotter ***wieplot*** 500
Data cable and manual
4 receptacles for WSB*
Accessories kit
Software ***wiemarc***

Description:

With ***wiemarc*** you can create customized marking data on your PC. These can then be output on the ***wieplot*** 500 plotter system to various marking plates.

* WSB (= Wieland standard marking system)

Technical data:

Resolution:	0.01 mm
Accuracy:	+/- 0.05 mm
Power supply unit:	50/60 Hz, 100–240 V,
Output voltage:	24 V DC 1.4 A
Current input:	ca. 0.3 A bei 220 V
Approval:	UL-UL1950
	CSA 950
	VDE EN 60950
Radio interf. suppr.:	FCC class B
	FCC sect. 15 and VDE class B
Dimensions:	660 mm x 440 mm x 125 mm
Weight:	8 kg
Interfaces:	USB Level 1.1, parallel

Ink kit for *wieplot* 500

Type	Part No.	Std. Pack
Ink kit	95.502.0610.0	1

Contents:

Plotter pen 0.25 mm with ink cartridge
Permanent plotter pen 0.3 mm
Cleaning set

Plotter pens for *wieplot* 500 systems:

Plotter pen 0.18 mm	95.502.0118.0
Plotter pen 0.25 mm	95.502.0125.0
Plotter pen 0.35 mm	95.502.0135.0
Plotter pen 0.50 mm	95.502.0150.0
Plotter pen 0.70 mm	95.502.0170.0
Plotter pen 1.00 mm	95.502.0100.0
Perm. plotter pen 0.30 mm	95.502.0230.0
Perm. plotter pen 0.70 mm	95.502.0270.0
Dispos. plotter pen 0.25 mm	95.502.0125.1
Dispos. plotter pen 0.35 mm	95.502.0135.1
Hand pens 0.25 mm	95.502.0425.0
Hand pens 0.35 mm	95.502.0435.0
Hand pens 0.50 mm	95.502.0450.0
Hand pens 0.70 mm	95.502.0470.0

Accessories:

Ink cartridge P1.0, 5 x 1 ml	95.502.0199.0
Cleaning set	95.502.0198.0
Pen cleaner	95.502.0197.0
Dust protection hood	95.502.0612.0
Service kit for pen station	95.502.0613.0
Seal inserts kit	

Receptacles for Wieland marking plates

Receptacle for WSB	95.502.0620.0
Receptacle for BZ/WKF 1,5	95.502.0627.0
Receptacle for BZ/WKF 1,5/10	95.502.0628.0

Available on request:
Receptacles for marking systems from competition
Use of ***wiemarc*** with non-Wieland plotter systems

Engraving unit for *wieplot* 500

Type	Part No.	Std. Pack
wieplot 500 E-UNIT	95.502.0700.0	1

Contents:

Engraving spindle
Engraving head (with fuse and counter bearing)
Control unit ***wieplot*** VEC 500
Vacuum cleaner ***wieplot*** VC 500
Connection cables

Description:

The ***wieplot*** 500 E-UNIT engraving unit has been designed for use with the ***wieplot*** 500 plotter. The system is set up for engraving multi-layer plastic tags. The Plotboard A4 in a 297 x 202 mm format is the receptacle for marking paper sheets and labels and also enables engraving of plastic boards.

Accessories:


Graving tool SET, complete	95.502.0710.0
Graving tool 0.2 mm	95.502.0710.2
Graving tool 0.3 mm	95.502.0710.3
Graving tool 0.4 mm	95.502.0710.4
Graving tool 0.5 mm	95.502.0710.5
Graving tool 0.7 mm	95.502.0710.7
Graving tool 1.0 mm	95.502.0711.0

Receptacle:

Plotboard A4	95.502.0625.0

Marking accessories for DIN rail terminal blocks

fasis

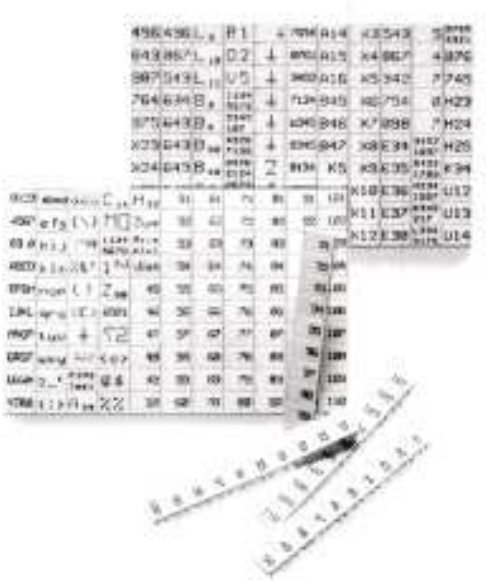





Marking plates

for ***marcom*** 2 marking computer
for ***wieplot*** 500 plotter system

All blocks/5 mm wide and larger

Type	Part No.	Std. Pack
Marking plate, unmarked		
Width 4 x 5.0 mm		100 tags per plate
9605 A/4/10/10	Z4.243.2053.0	10
for outer block marking		
Marking plate, unmarked		
Width 5 x 8.3 mm		110 tags per plate
9075 A/5/10/11	Z4.242.5053.0	10
Width 5 x 14 mm		60 tags per plate
9705 AL/5/10/6	Z4.242.5153.0	10
Marking plate, unmarked		
Width 6 x 8.3 mm		110 tags per plate
9705 A/6/10/11	Z4.242.6053.0	10
Width 6 x 14 mm		60 tags per plate
9705 AL/6/10/6	Z4.242.6153.0	10
Marking plate, unmarked		
Width 8 x 8.3 mm		70 tags per plate
9705 A/8/10/7	Z4.242.8053.0	10

Type	Part No.	Std. Pack
Single marking tag, unmarked		
Width 5 x **8.3** mm		
9705 A	04.242.0850.0	500
Width 5 x **14** mm		
9705 AL	04.242.1553.0	500
Single marking tag, marked		
Width 5 x **8.3** mm		
9705 AB*	04.842.0850.0	500
Width 5 x **14** mm		
9705 ALB	04.842.1553.0	500

* Custom marking upon request

1.5 mm²/4 mm wide

Type	Part No.	Std. Pack
Marking strips, unmarked		
for center block marking		
9605 A/4/10	04.243.2053.0	100
Marking strips, marked		
for center block marking		
9605 A/4/10 B	04.843.2053.0	25

for outer block marking
see under marking plates

* Custom marking upon request

Subject to change without further notice

fasis







2.5 mm²/5 mm wide

Type		Part No.	Std. Pack
Marking strips, unmarked			
9705 A/5/10		04.242.5053.0	25
Marking strips, marked			
9705 A/5/9 B	1 – 9	04.842.4953.0	25
9705 A/5/10 B*		04.842.5053.0	25
9705 A/5/10 B	1 – 10	04.845.0153.0	25
	11 – 20	04.845.0253.0	25
	21 – 30	04.845.0353.0	25
	31 – 40	04.845.0453.0	25
	41 – 50	04.845.0553.0	25
	51 – 60	04.845.0653.0	25
	61 – 70	04.845.0753.0	25
	71 – 80	04.845.0853.0	25
	81 – 90	04.845.0953.0	25
91 – 100		04.845.1053.0	25
	⏚ (10 x)	04.855.0053.0	25
	⏚ (10 x)	04.855.0153.0	25
	+ (10 x)	04.855.0253.0	25
	– (10 x)	04.855.0353.0	25
	L1 (10 x)	04.855.0453.0	25
	L2 (10 x)	04.855.0553.0	25
	L3 (10 x)	04.855.0653.0	25
	PE (10 x)	04.855.0753.0	25
	SL (10 x)	04.855.3153.0	25
	N (10 x)	04.855.3253.0	25
	F1 (10 x)	04.855.0953.0	25
	F2 (10 x)	04.855.1053.0	25
L1, L2, L3, N, PE	(2 x)	04.855.0853.0	25
with enlarged marking area			
9705 AL/5/10		04.242.5153.0	25
* Custom marking upon request			

4 mm²/6 mm wide

Type		Part No.	Std. Pack
Marking strips, unmarked			
9705 A/6/10		04.242.6053.0	25
Marking strips, marked			
9705 A/6/9 B	1 – 9	04.842.5953.0	25
9705 A/6/10 B*		04.842.6053.0	25
9705 A/6/10 B	1 – 10	04.846.0153.0	25
	11 – 20	04.846.0253.0	25
	21 – 30	04.846.0353.0	25
	31 – 40	04.846.0453.0	25
	41 – 50	04.846.0553.0	25
	51 – 60	04.846.0653.0	25
	61 – 70	04.846.0753.0	25
	71 – 80	04.846.0853.0	25
	81 – 90	04.846.0953.0	25
91 – 100		04.846.1053.0	25
	⏚ (10 x)	04.856.0053.0	25
	⏚ (10 x)	04.856.0153.0	25
	+ (10 x)	04.856.0253.0	25
	– (10 x)	04.856.0353.0	25
	L1 (10 x)	04.856.0453.0	25
	L2 (10 x)	04.856.0553.0	25
	L3 (10 x)	04.856.0653.0	25
	PE (10 x)	04.856.0753.0	25
	SL (10 x)	04.856.3153.0	25
	N (10 x)	04.856.3253.0	25
	F1 (10 x)	04.856.0953.0	25
	F2 (10 x)	04.856.1053.0	25
L1, L2, L3, N, PE	(2 x)	04.856.0853.0	25
with enlarged marking area			
9705 AL/6/10		04.242.6353.0	25
* Custom marking upon request			

10 mm²/10 mm wide
16 mm²/12 mm wide
35 mm²/16 mm wide

Type	Part No.	Std. Pack
10 mm²/10 mm wide		
marked for 5 blocks (every 2nd tag) *		
9705 A/5/10/5 B	04.842.5553.0	25
16 mm²/12 mm wide		
marked for 5 blocks (every 2nd tag) *		
9705 A/6/10/5 B	04.842.6553.0	25
35 mm²/16 mm wide		
marked for 5 blocks (every 2nd tag) *		
9705 A/8/10/5 B	04.842.8553.0	25
* Specifiy required marking with part no.		


Ferrules
for DIN rail terminal blocks

fasis

Ferrules with insulating material sleeve


Materials:
Sleeve: Polypropylene, temperature resistance 105 °C, creepage resistant

Tube: E-Cu, galvanically tin-plated

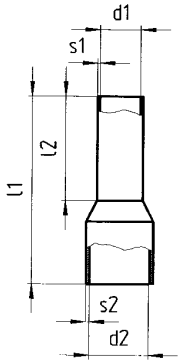

Ferrules without insulating material sleeve

Material:
Tube: E-Cu, galvanically tin-plated



	Cross section mm²		Color	Part No.	Std. Pack
Ferrules with insulating material sleeve	0.50	norm.	white	06.600.2027.0	100
according to DIN 46 228 T4	0.75	norm.	gray	06.600.2127.0	100
	1.00	norm.	red	06.600.2227.0	100
	1.50	norm.	black	06.600.2327.0	100
	1.50	long	black	06.600.2427.0	100
	2.50	norm.	blue	06.600.2527.0	100
	2.50	long	blue	06.600.2627.0	100
	4.00	norm.	gray	06.600.2727.0	100
	4.00	long	gray	06.600.2827.0	100
	6.00	norm.	yellow	06.600.2927.0	100
	6.00	long	yellow	06.600.3027.0	100
	10.00	norm.	red	06.600.3127.0	100
	10.00	long	red	06.600.3227.0	100
	16.00	norm.	blue	06.600.3327.0	100
	16.00	long	blue	06.600.3427.0	100
	25.00	halblong	yellow	06.600.3527.0	50
Ferrules without insulating material sleeve	0.50	norm.		06.600.4027.0	1000
according to DIN 46 228 T1	0.75	norm.		06.600.4127.0	1000
	1.00	norm.		06.600.4227.0	1000
	1.50	norm.		06.600.4327.0	1000
	2.50	norm.		06.600.4427.0	1000
	4.00	norm.		06.600.4527.0	1000
	6.00	norm.		06.600.4627.0	500
	10.00	norm.		06.600.4727.0	500
	16.00	norm.		06.600.4827.0	100
	25.00	norm.		06.600.4927.0	100
	35.00	norm.		06.600.5027.0	100

Subject to change without further notice

Tools
for DIN rail terminal blocks





Wire strippers

0.08 – 10 mm² AWG 28 – 7

Pressing tools

A: 0.08 – 10 mm² AWG 28 – 7
B: 10 – 25 mm² AWG 7 – 4
C: 35 – 50 mm² AWG 2 – 1/0

		Type	Part No.	Std. Pack	Type	Part No.	Std. Pack
Wire strippers		AIW/A	95.350.0100.0	1			
Pressing tool for ferrules							
Pressing tool A	Length: 180 mm				PW/A	95.101.1300.0	1
Pressing tool B	Length: 203 mm				PW/B	95.101.1100.0	1
Pressing tool C	Length: 203 mm				PW/C	95.101.1200.0	1

DIN rail terminal blocks for junction boxes with spring clamp connection, type *WKF/WKIF/WKIS*


fasis

„We at Wieland" know what you need!

For more than 90 years we have been your competent partner in the field of connection technology for your products. Close cooperation with our customers helps to create innovative products manufactured according to the highest quality standards.

Increasing automation as well as the safety functions to be implemented inside buildings increase the requirements for power and signal management in electrical distribution systems. The growing number of circuits and the increasingly confined space available requires a DIN rail terminal block system that reduces the amount and costs of cabling but still enables clear and convenient wiring.

Wieland's DIN rail terminal blocks provide you with the right solution.

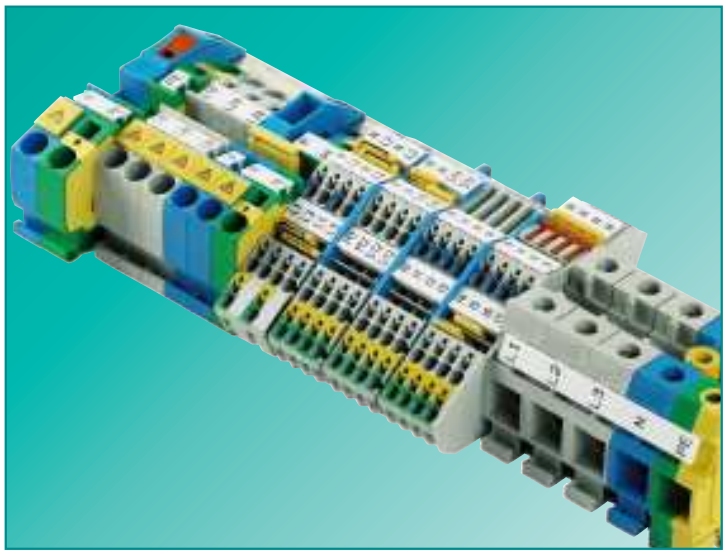









selos/fasis BIT

The right solution for your application

All DIN rail terminal blocks of the BIT series comply with the directives for the setup of high-voltage and supply systems for safety services according to VDE 0108 and have been designed for use in public buildings. Isolation measurement, for example, can be carried out with the wires connected.

You have the choice. The connection technology can be implemented either in purely spring clamp or screw technology or they can be mixed together.

fasis BIT-S
Type WKIS...

DIN rail terminal blocks with push-in spring

The new installation blocks of series ***fasis*** BIT-S with push-in are an outstanding extension to the existing product range.

fasis BIT-S helps to increase efficiency in electrical installations even more, since rigid as well as flexible wires with ferrules can be directly connected without opening the termination point thus achieving considerable time savings.

fasis BIT
Type WKF/WKIF...

DIN rail terminal blocks with tension spring

The tension spring technology of series ***fasis*** BIT stands out due to its maintenance-free and vibration-proof connection technology. The TOP connection is especially suitable for confined spaces.

Due to its great product variety and a wire range between 0.5 mm^2 and 16 mm^2 the ***fasis*** BIT series enables many innovative solutions for various requirements.

selos BIT
Type WK/WKI...

DIN rail terminal blocks with screw connection

The screw connection technology of series ***selos*** BIT is the best known and most widely used connection technology worldwide. The lateral connection option makes wiring more convenient in installations, especially on the supply side and in the case of larger cross sections.

The user-friendly ***selos*** BIT series can be used universally in the wire range between 0.5 mm^2 and 50 mm^2.

Subject to change without further notice

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Wieland Electric:

RST08i3-2s-s1-zr1-h-sw 07.431.7353.8 - AD WRT 185/300 58.503.0055.0 80.010.4502.0 96.051.4053.6 97.051.4053.1 99.441.0000.8 Z2.803.4110.0 - WST 13,5 / C 99.403.5802.2 99.411.0000.8 07.313.2655.0 - TW WT 2,5-10 34.243.0012.0 96.031.5053.1 80.010.4141.0 80.063.4034.0 91.951.3053.0 92.932.3053.0 92.232.1000.2 25.350.3353.0 46.050.0153.1 80.010.4525.0 93.421.4553.1 92.232.1060.1 92.238.6063.2 94.732.3007.1 91.931.9053.0 93.031.3250.0 93.831.4350.0 Z1.110.9055.0 - WBF 2,5 1/R/GR Z2.803.4210.0 - WST 20 / C