

This document contains proprietary information and such informationmay not be disclosed to others for any purposes,
not used for sales/marketing/procurement purposes without written permission


REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	———	H.wei	12/7/06	12/7/06

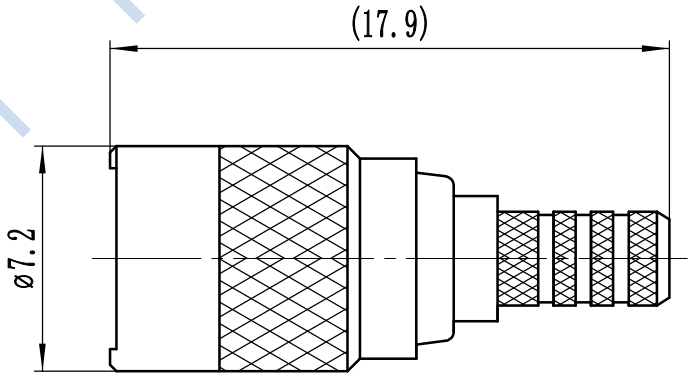


1 Environmental&Mechanical环境&机械性能
1.1 Temperature range温度范围: -55℃～+125℃
1.2 RoHs Compliant 符合RoHs
1.3 Durability寿命: >500 cycles（次）

2 Materials&Finish材料&涂镀
2.1 Coupling Nut螺套:Brass,Gold plated 黄铜,镀金
2.2 Insulator 绝缘介质:Teflon 聚四氟乙烯
2.3 Contact Pin中心导体:Beryllium-Copper,Gold plated 铍青铜，镀金
2.4 Body外壳:Beryllium-Copper,Gold plated 铍青铜,镀金



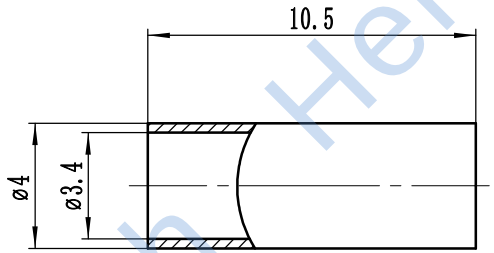

Recommended Cable Stripping Dimension

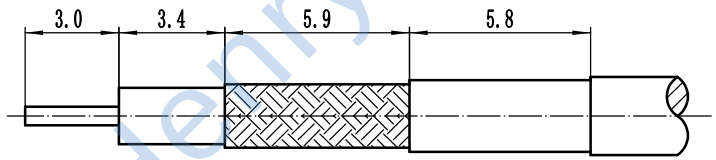

Notes:
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: H.wei 12/07/06	TITLE: 同轴旋转自锁紧，接上图所示结构 75 Ω 双层屏蔽同轴电缆，公头连接器(经济型).				
ENGINEER: L.yu 12/07/06		HenryTech			
APPROVED: W.yi 12/07/06		DIMENSION IN MILLIMETERS (mm)			
TOLERANCES UNLESS OTHERWISE SPEFICIED X ±0.50 .X ±0.20 .XX ±0.10 ANGLES ±1°	PART NO: HL-ZLC-JYS	SIZE: A4	SCALE: N/A	SHEET: 1/1	REV: A

HenryTech

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

HenryTech:

HT-HFCN-2700+ HT-BFHKI-1572+ HN-DC2016-0.5(12-4.6)M HT-HFCN-3800+ HT-LFCG-530+ HX-N-JK HL-SMA-KHD4 HX-1.85-JJ H2SYDC-20-62HP+ H3-MABA-007871-CT1A40 H3-MABA-010551-CF1071 H3-MABA-011085 HL-SMAMF-2-18-15dB HLCC2250G H3-TC1-1TG2+ HG-SCN-2-22+ HG-SCN-2-65+ HN-LP7-0.5-1.27(9.4-2.8) H3-MAPD-008109-C30040 HL-SMA/SMB-KK HT-LFCN-400+ HT-QCN-19+ HT-SCA-4-10+ HX-SMA/SMP-JK HL-N-KKC HL-SMB-K3DY HL-SSMA-KHD-1 HT-LFCG-1700+ HT-LFCN-3800+ HL-MCX-KE-02