
Rocker Switch | **RC-1A-DC-1-RL**


SWITCH COMPONENTS

Mechanical Dimensions (mm)

Tolerances ±0.3 Unless Otherwise Specified

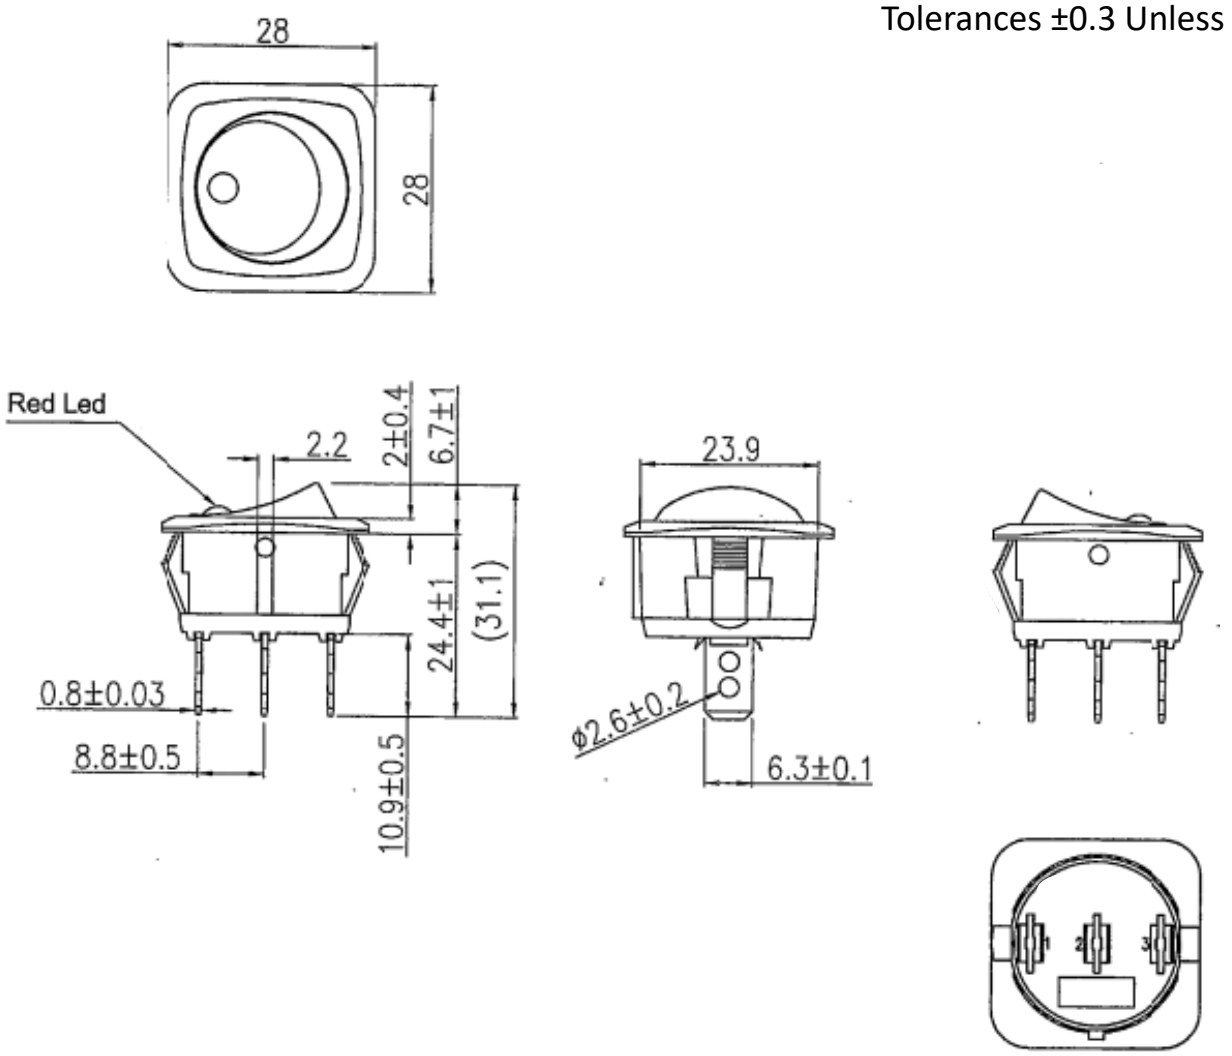


Mounting Hole

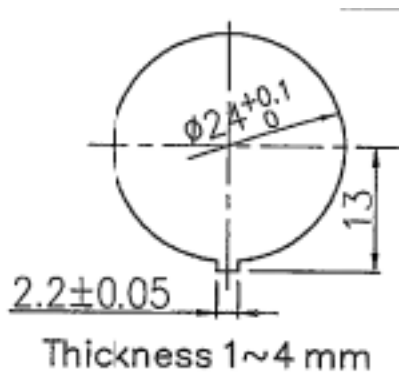

Circuit Diagram

3P SPST OFF-ON (LED-D)



Electrical Specifications

Rating	25A 12V DC
Contact Resistance	50m ohm Max.
Insulation Resistance	DC 500V 100M ohm Min.
Dielectric Strength	AC 1500V 1 minute
Operation Temperature	-20°C~65°C

Material Specifications

Frame	Black, Nylon 66
Actuator	Black, Nylon 66+33%GF
LED	Red (Dependent)

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Switch Components:

SB-1B-DC-3-B PB-1A-DC-2-B PB-1A-DC-2-RDL RD2-1A-DC-1-AL SRB1-1G-DC-1-NN TE6-1A-DC-1-UL SC-B TA2-1G-DC-6-O WR1 PB-1B-DC-2-RIL RA4-2A-DC-2-AL RC-1A-DC-1-AL TB1-2H-DC-6 TC6-P1-Z RF3-1A-DC-2-GL SRA1-1A-DC-1-NN-2 RF1-1A-DC-2-B-3 RG3-1A-DC-1-B SRC1-1B-DC-1-B SRD2-2F-DC-1-BNN PD-1E-DC-9-UL SB-1B-DC-3-R SRA1-2F-DC-1-NN SRD2-2F-DC-1-RNN TA2-1A-DC-5 SRD1-2A-DC-1-BGN SRD2-1G-DC-1-BNN TA1-1A-DC-4 TE1-1F-DC-1-PB TE3-1A-DC-1-AL