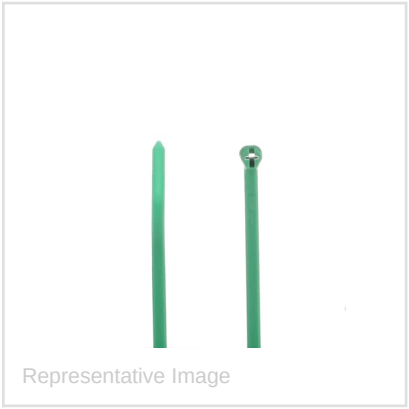


Catalog No. TY25M-5

Description: CABLE TIE 50LB 7IN GREEN NYLON

UPC No 786210844886

Home > Wire & Cable Management > Ty-Rap > Cable ties

High Performance Cable Tie for Indoor applications, Green Color Nylon 6.6, Length of 186mm (7.3 Inches) for Bundle Diameter up to 48mm (1.89 Inches), Width of 4.9mm (0.19 Inches), Tensile Strength Rating of 222 Newtons (50 Pounds), Operating Temperature of -60 Degrees Celsius (-76 F) to 85 Degrees Celsius (185 F), UL/EN/CSA62275 Type 2/21S Rated for AH-2 Plenum and as a Flexible Cable and Conduit Support, Military Specified (MIL-SPEC MS3367-1-5), Bulk Pack

Descriptors

Category	Cable ties
Type	High Performance
Special Features	Low profile head is designed to prevent snags on uneven surfaces and easier to pull through bulkheads. Non-magnetic stainless steel locking device insures both maximum strength and the right tightness every time.

Specifications

Material	Nylon/Polyamide 6.6
Color	Green
Lock Mechanism	Stainless Steel Barb
Tensile Strength	50 pounds , 222 newtons

Classifications

Brand Name	Ty-Rap
Standard	UL E49405

Dimensions

Width	0.19 in , 4.9 mm
Length	7.2 in , 183 mm
Thickness	0.05 in , 1.3 mm
Bundle Diameter	0.12 to 1.89 in , 3 to 48 mm

Compliance and Certifications

RoHS	RoHS3 Compliant

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

ABB:

1SVR730700R2200 CP1-10G-11 CR-M4SFB ESB63-20N-01 GSH201 AC-C16/0.03 S202-B6 SE201-C10
1SL1204A00 ESB25-13N-04 OXP6X360 WT540 7TAG009520R0070
AX09-30-01-80*220-230V 50Hz/230-240V60Hz MS132-1.0 2CCA880212R0001 APTS020A0X3-SRZ
CR-S024VADC1CRS ESB25-40N-03 SH203-C25 SU201M-K16 ESB63-22N-06 LW205 WT115A
CT-MKC.31 LCN75 ESB25-22N-03 ESB40-30N-07 SH203-C16 ESB16-20N-06 ESB63-40N-05