



# D款，反向10.0后两脚,DIP-*6.80

| MAPX | MODIFICATION | DATE |
|---|---|---|
| | | |

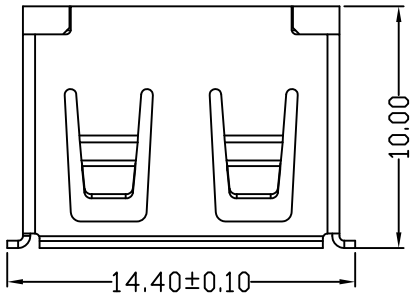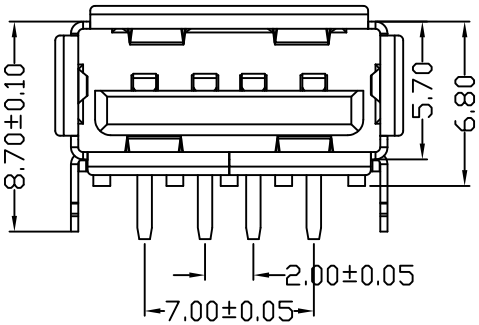

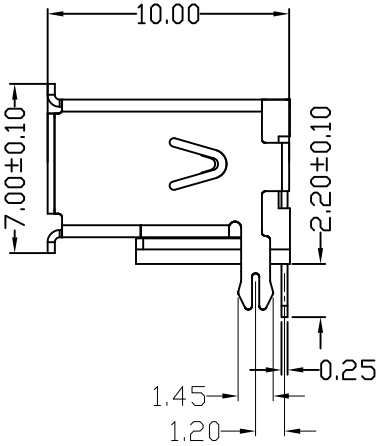


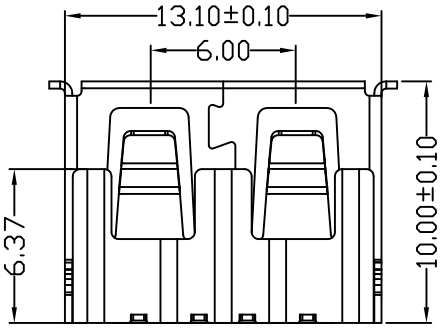

NOTES:
1.HOUSING: SEE NOTES, UL94V-0 .
TERMINAL: SEE NOTES.
SHELL: SEE NOTES.

SPECIFICATION:
1.ELECTRICAL CHARACTERISTIC:
CONTACT RESISTANCE: 30MΩ MAX
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1MIN
INSULATION RESISTANCE: 1000MΩ MIN
2.MECHANICAL CHARACTERISTIC:
INSERTION FORCE: 35N(3.57KGF) MAX
EXTRACTION FORCE: 10~35N(1.02~3.57KGF)MIN
DURABILITY: 1500 CYCLES EXTRACTION FORCE:10~35N
5000 CYCLES MIN
5000 CYCLES EXTRACTION FORCE:3~35N
3.ENVIRONMENTAL:
OPERATING TEMPERATURE: -55℃+85℃
4.Contact finish:
01:Selective Gold Flash
02:Selective Gold 3U"
03:Selective Gold 5U"
04:Selective Gold 15U"
05:Selective Gold 30U"

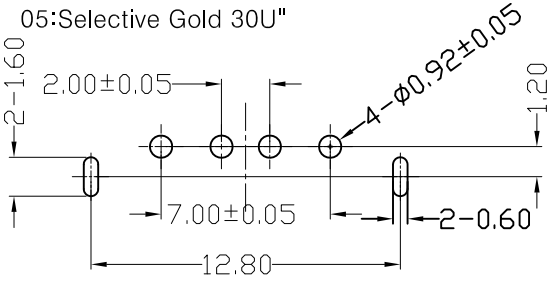


FRONT EDGE OF CONNECTOR
PCB LAYOUT (T=1.60mm)

| 产品图 PRODUCT CHART DWG | | | |
|---|---|---|---|
| 公差一览表 TOLERANCE UNLESS OTHERMSE | | | |
| X. | ±0.15 | X. | ±5.° |
| .X | ±0.10 | .X | ±2.° |
| .XX | ±0.05 | .XX | ±1.° |
| .XXX | ±0.03 | .XXX | ±0.5° |

# 深圳市精拓金电子有限公司

| | | | | | |
|---|---|---|---|---|---|
| 单位 UNITS | MM | 制图 DRAWING | Z-Y-B | 制图料号 PRODUCT PART NO. | 911-211B2028D10100 |
| 比例 SCALE | 1:1 | 审核 CHKD | | 产品名称 PRODUCT NO. | AF10.0D款后两脚有边方弹铁壳反向 LCP黑胶6.8DIP |
| 日期 DATE | 2012.09.24 | 核准 APPD | | 角法 VIEW | 版本 VER A0 |

# Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

## Jing extension:

906-752B1114D10200 907-111A1022D10200 911-221A2021S10100 920-154A2021Y10110
920-A62A2021S10104 906-262A1021D10200 906-552A1012D10200 910-151A2021D10100
912-312A1012D10100 916-151A1022Y10200 918-468K2029Y50000 917-P81A202ES60201
920-A62A2021S10108 904-232A2031S10100 920-C62A2021S10103 904-232B2032S10100
907-312A1101Y10210 908-351A1011D10100 917-B88C201AH70201 918-318K2023C40005
905-761A2032S10200 912-112A1011D10100 912-112A2021S10100 918-415K3028S40000
920-C52A2021S10105 920-F52A2021S10105 904-331B2032S10200 918-418K2022Y40011
919-162A1012D10400 920-A64A2091S101A3