


ITEM	DESCRIPTION	MATERIAL	FINISH
A	U.FL PLUG	BRASS	GOLD
B	SEALED RP-SMA FEM. BULKHEAD MOUNT CONNECTOR	BRASS	GOLD
C	CABLE	1.13mm COAXIAL	GRAY
D	NUT	BRASS	GOLD
E	WASHER	BRASS	GOLD
F	O-RING	Si RUBBER	BLACK
G	HEAT SHRINK TUBING	POLYOLEFIN	BLACK

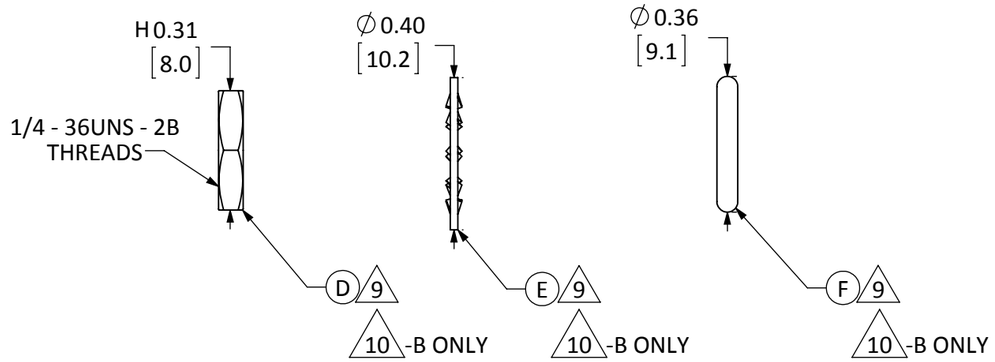

REVISIONS			
REV	DESCRIPTION	DATE	APPV
A	INITIAL RELEASE OF LINX INTERNAL DRAWING	18-AUG-17	CLL
B	UPDATED NOTES TO ADD TORQUE SPECIFICATIONS AND PACKAGING INSTRUCTIONS; ADDED MOUNTING HOLE; ADDDED "-B" PART NUMBERS; UPDATED DIMENSIONS	27-OCT-17	CLL

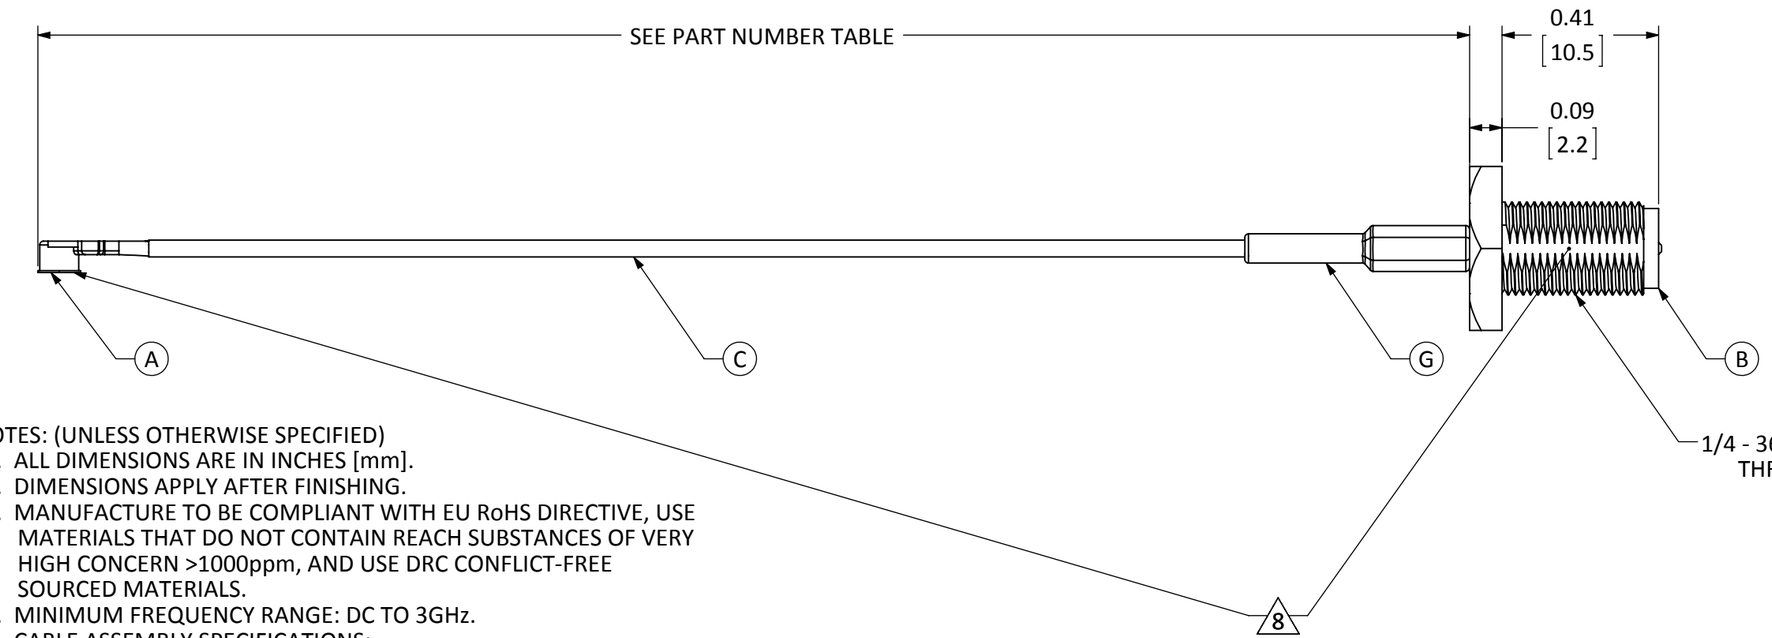



RECOMMENDED
MOUNTING HOLE

NOTES: (UNLESS OTHERWISE SPECIFIED)
1. ALL DIMENSIONS ARE IN INCHES [mm].
2. DIMENSIONS APPLY AFTER FINISHING.
3. MANUFACTURE TO BE COMPLIANT WITH EU RoHS DIRECTIVE, USE MATERIALS THAT DO NOT CONTAIN REACH SUBSTANCES OF VERY HIGH CONCERN >1000ppm, AND USE DRC CONFLICT-FREE SOURCED MATERIALS.
4. MINIMUM FREQUENCY RANGE: DC TO 3GHz.
5. CABLE ASSEMBLY SPECIFICATIONS;
   - CHARACTERISITIC IMPEDANCE: 50Ω ± 3Ω
   - INSERTION LOSS: 100mm - 0.34√f IN GHz TYP.
     200mm - 0.56√f IN GHz TYP.
     300mm - 0.73√f IN GHz TYP.
6. CONNECTORS TO BE APPLIED IN ACCORDANCE WITH CONNECTOR SUPPLIER RECOMMENDED PROCEDURE.
7. TORQUE SPECIFICATIONS:
   - BULKHEAD MOUNTING NUT TORQUE: 7 TO 10 in-lbs.
   - RECOMMENDED MATING TORQUE: 7 TO 10 in-lbs.

△8 CONNECTORS TO BE ORIENTED WITH U.FL CONNECTOR MATING FACE 90° CLOCKWISE FROM BULKHEAD CONNECTOR THREAD FLAT FACE, AS SHOWN.

△9 INSTALL O-RING (ITEM F), WASHER (ITEM E) AND NUT (ITEM D) ONTO CONNECTOR (ITEM B).

△10 -B PART NUMBERS ONLY: SHIP O-RINGS (ITEM F), WASHERS (ITEM E) AND NUTS (ITEM D) IN SEPARATE BAGS OF 100 PIECES EACH.

PART NUMBER	CABLE LENGTH
CSI-RGFI-100-UFFR	100mm ± 1.5mm
CSI-RGFI-200-UFFR	200mm ± 3.0mm
CSI-RGFI-300-UFFR	300mm ± 4.5mm
CSI-RGFI-100-UFFR-B	100mm ± 1.5mm
CSI-RGFI-200-UFFR-B	200mm ± 3.0mm
CSI-RGFI-300-UFFR-B	300mm ± 4.5mm

©2023 TE Connectivity. All Rights Reserved.

WARNING: THIS DRAWING CONTAINS PROPRIETARY INFORMATION THAT IS THE SOLE PROPERTY OF LINX TECHNOLOGIES, AND SHALL BE TREATED AS SUCH. NO DISCLOSURE OR REPRODUCTION OF THIS DOCUMENT IS PERMITTED, IN WHOLE OR IN PART, WITHOUT THE EXPRESS WRITTEN PERMISSION OF LINX TECHNOLOGIES OR ITS DESIGNATED AGENTS.

MATERIAL:
FINISH:
INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5.
PROJECTION:
SURFACE FINISH: 32 ANGLES: ±1°
TOLERANCES: .X ±.1 .XX ±.01 .XXX ±.005
DRAWN: B.MURPHY DT: 26-JUL-17
ENGR: D.VARATHARAJAN DT: 18-AUG-17

TE connectivity

TITLE: CABLE ASSEMBLY, U.FL TO FEM. BLKHD RP-SMA, 1.13mm CBL

SIZE B | DWG. NO. CSI-RGFI-ccc-UFFR-p | REV B

SCALE: 2.5:1 DO NOT SCALE DRAWING SHEET 1 OF 1

LDCFDFB_B

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

ROX05SJ18R SMW73R0JT 2834055-1 3631B101LL 917696-1 MPT100C18RF SBCHE154R7K
1-962915-1 3430B2F51RTDF SBCHE64R7K 1393431-1 1743455-2 1969656-1 2005330-1
CRGCQ2010J3K3 U5254-000005-030PA 936348-1 141991-2 1903112-2 2310537-1 175977-2 2-292161-3
2377783-2 2380312-2 CPF0402B37K4E1 3-1393225-0 650075-000 TE50BR39J 1-794222-0
RH73H2A40MKTN