



RoHS

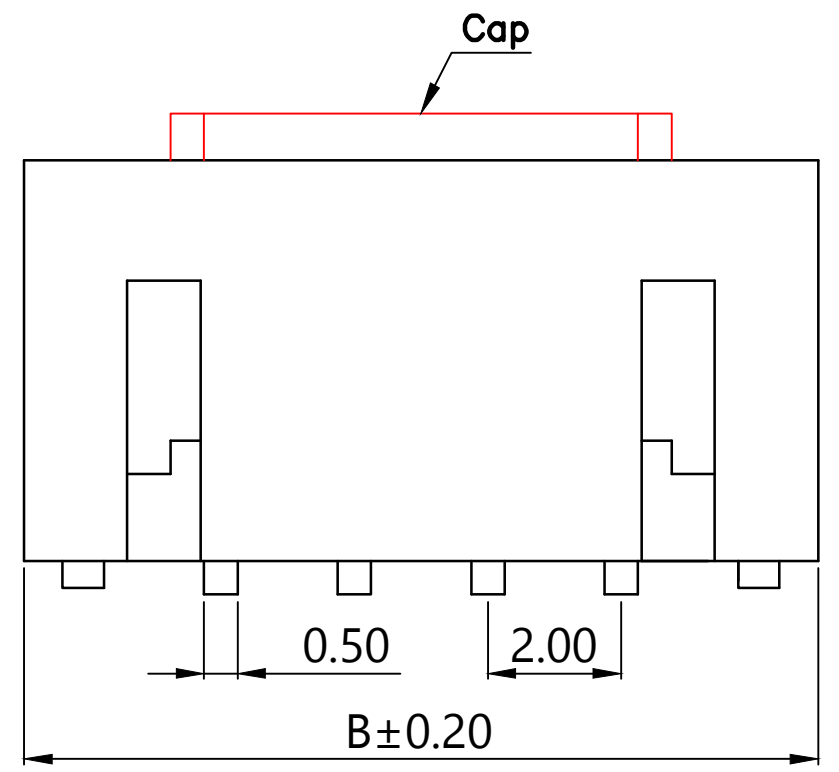


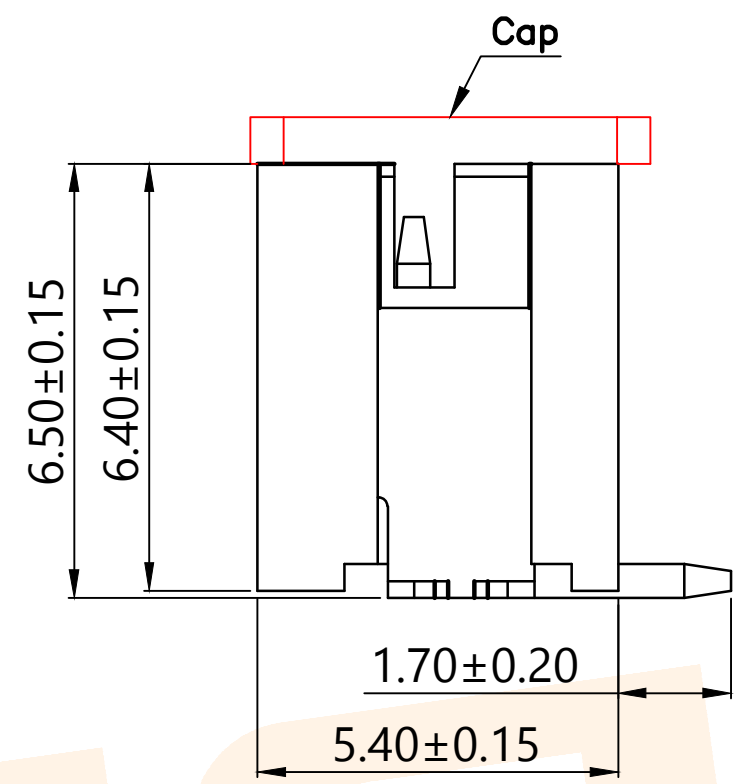


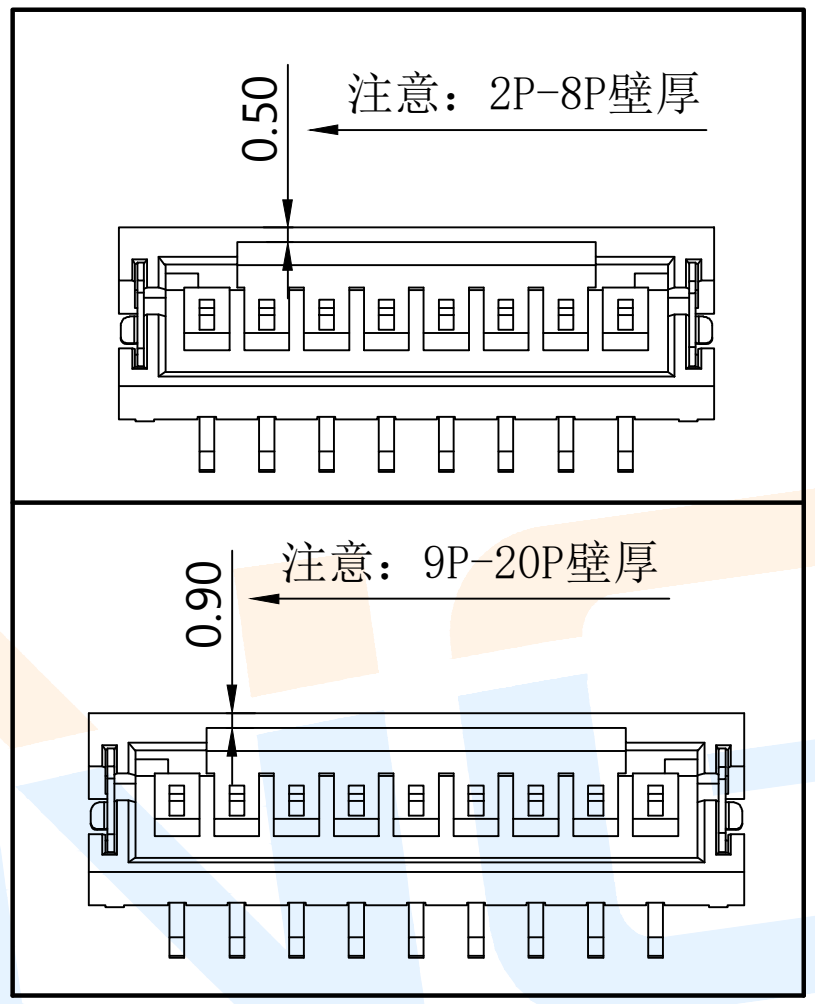

Model No.	Pin	A	B	C
WAFER-PH2.0-2PLT-W1	2	2.00	7.90	4.80
WAFER-PH2.0-3PLT-W1	3	4.00	9.90	6.80
WAFER-PH2.0-4PLT-W1	4	6.00	11.90	8.80
WAFER-PH2.0-5PLT-W1	5	8.00	13.90	10.80
WAFER-PH2.0-6PLT-W1	6	10.00	15.90	12.80
WAFER-PH2.0-7PLT-W1	7	12.00	17.90	14.80
WAFER-PH2.0-8PLT-W1	8	14.00	19.90	16.80
WAFER-PH2.0-9PLT-W1	9	16.00	21.90	18.80
WAFER-PH2.0-10PLT-W1	10	18.00	23.90	20.80
WAFER-PH2.0-11PLT-W1	11	20.00	25.90	22.80
WAFER-PH2.0-12PLT-W1	12	22.00	27.90	24.80
WAFER-PH2.0-13PLT-W1	13	24.00	29.90	26.80
WAFER-PH2.0-14PLT-W1	14	26.00	31.90	28.80
WAFER-PH2.0-15PLT-W1	15	28.00	33.90	30.80
WAFER-PH2.0-16PLT-W1	16	30.00	35.90	32.80
WAFER-PH2.0-17PLT-W1	17	32.00	37.90	34.80
WAFER-PH2.0-18PLT-W1	18	34.00	39.90	36.80
WAFER-PH2.0-19PLT-W1	19	36.00	41.90	38.80
WAFER-PH2.0-20PLT-W1	20	38.00	43.90	40.80
WAFER-PH2.0-□□PLT-W1(-P=盘装, 非盘装不启用)				

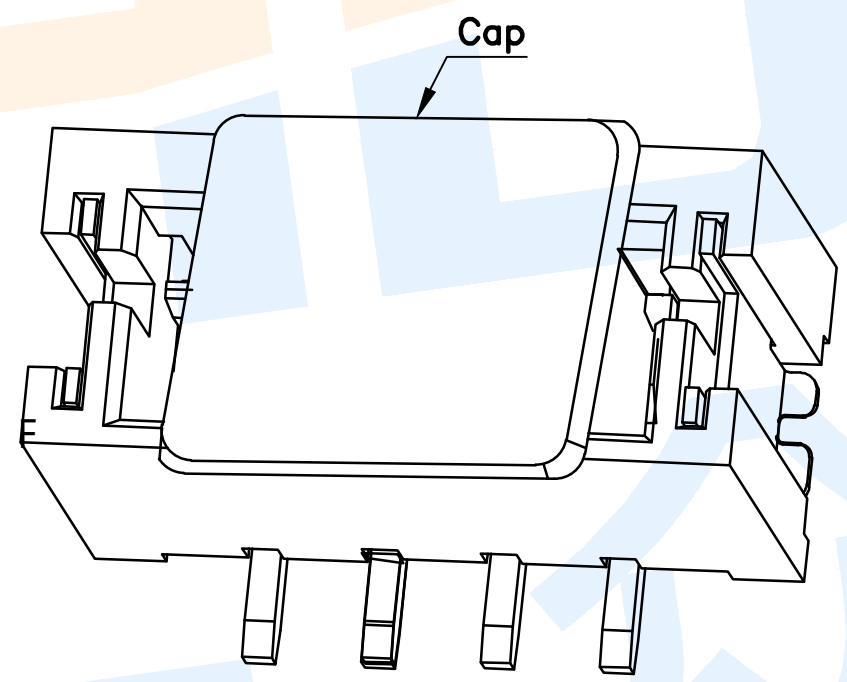

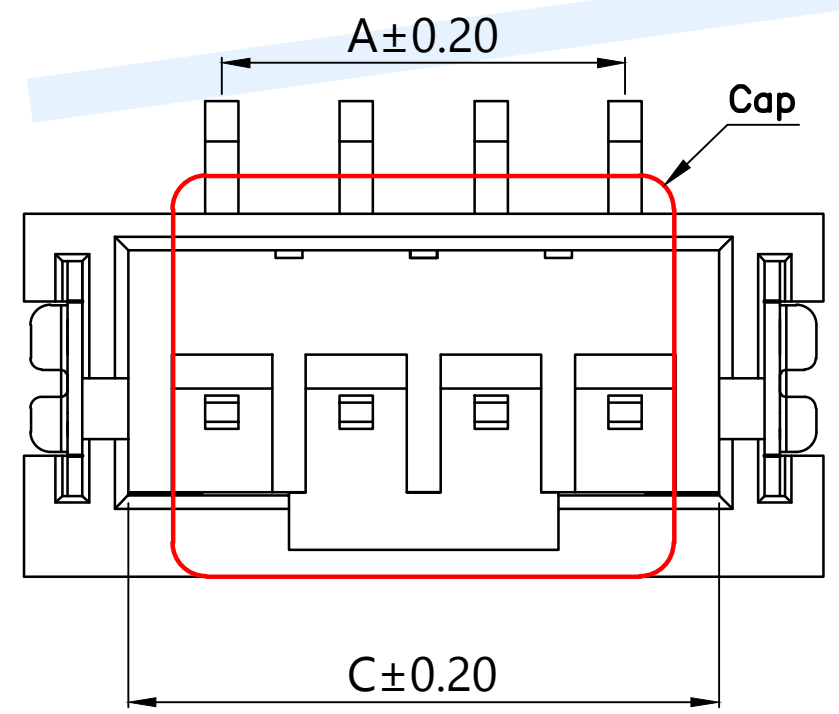

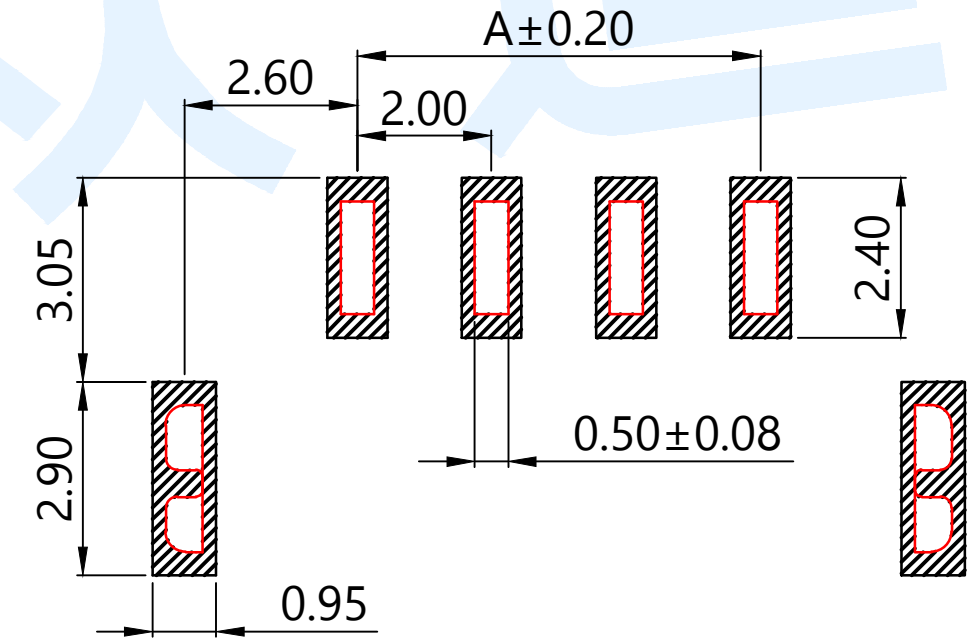

适用线路板(PCB LAYOUT)

Specifications/技术规格:

1.Poles/线数：2～20P
2.Wire range/适用线规：AGW 30#～24#
3.Applicable PC board thickness/适用PC板厚度：0.8～1.6mm
4.Current rating/额定电流：2.0A
5.Voltage rating/额定电压：100V DC/AC
6.Insulation Resistance/绝缘电阻：1000MΩ Min
7.Dielectric Withstanding/ 耐电压：800V AC/minute
8.Contact Resistance/ 接触电阻：20mΩ Max
9.Operating Temperature/ 工作温度：-25℃ to +85℃

NO.	Name	Number	Qty	Materil	Remarks
Ⓒ	Soldering lug		1	Brass	Plating Sn
Ⓑ	Terminal			Brass	Plating Sn
Ⓐ	Housing		1	LCP	Off White

ZHONGDI® 众迪 Zhongdi Electronic Technology Co., Ltd

angle	±2°	design		date		name	WAFER CONNECTOR					
10~30	±0.30	Review		date		model	WAFER-PH2.0-□□PLT-W1					
5~10	±0.20	Approved		date								
~ 5	±0.10	Drawing number:										
modify	Review	Approved	Tolerance not specified	Proportion	1:1	unit	mm	gape number		A4		

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

ZHONGDI:

WAFER-TJC8-2.54-12PZZ WAFER-XH2.54-12PWT-W1-P WAFER-XHB2.54-7PWT-W1-P
WAFER-HY2.0-10PWT-W1-P WAFER-HY2.0-4PWT-W1-P WAFER-MX1.25-4PWZ-C22-9T
WAFER-PH2.0-2PWT-W1-P WAFER-SUR0.8-4PLT-W1-P WAFER-GH1.25-12PLT-W1-P
WAFER-GH1.25-14PWT-W1-P WAFER-HY2.0-7PWT-W1-P WAFER-MX1.25-5PLT-W1-P
WAFER-MX1.25-5PZZ-C22-9T WAFER-SH1.0-6PWT-W1-P WAFER-VH3.96-3PWT-W1-P
WAFER-HY2.0-6PWT-W1-P WAFER-SUR0.8-14PWT-W1-P WAFER-SH1.0-8PWT-W1-P
WAFER-TJC8-2.54-2PWZ WAFER-HY2.0-6PLT-W1-P WAFER-MX1.25-2PWZ-C22-9T
WAFER-SUR0.8-12PWT-W1-P WAFER-SH1.0-11PLT-W1-P WAFER-SHB1.0-8PWT-W1-P
WAFER-ZH1.5-12PWT-W1-P WAFER-ZH1.5-2PLT-W1-P WAFER-ZH1.5-4PLT-W1-P
WAFER-SHB1.0-13PLT-W1-P WAFER-VH3.96-5PWT-W1-P WAFER-ZH1.5-2PWT-W1-P