



REV.	DATE	DESCRIPTION
A	04/31/03	UPDATE DRAWING FORMAT
B	10/19/06	REVISE PLATING TO NICKEL (BODY, COVER, FERRULE)
C	11/13/06	MODIFY BARREL O.D. TO 2.7mm

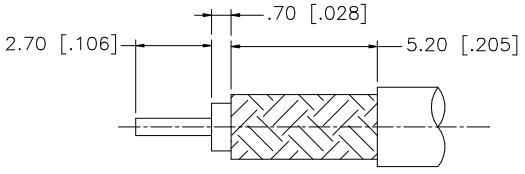



RECOMMENDED
CABLE STRIPPING DIM'S



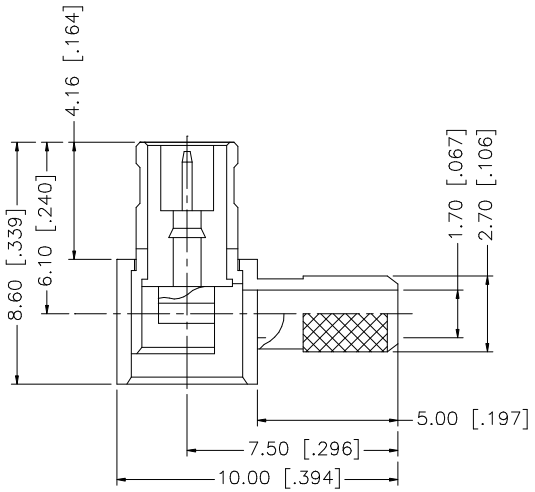





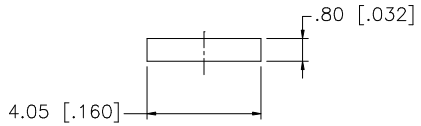

NOTE:

1. CRIMPED FERRULE HEX CRIMP SIZE .128"
2. CONTACT PIN TO SOLDER

8				
7				
6	FERRULE	COPPER	NICKEL	1
5	COVER	BRASS	NICKEL	1
4	INSULATOR	DELRIN	NATURAL	1
3	CONTACT PIN	BRASS	GOLD	1
2	INSULATOR	TEFLON	NATURAL	1
1	BODY	BRASS	NICKEL	1
	DESCRIPTION	MATERIAL	FINISH	QTY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERANCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 – 8mm ± 0.20mm
8 – 30mm ± 0.40mm
30 – 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 – .315 = ± 0.007"
.315 – 1.180 = ± 0.015"
1.180 – 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN G.R.S.	11/13/06
CHECKED	
ISSUED	
SHEET 1 OF 1	

CAD FILE C:/252/252100.DWG

Amphenol Connex

PART DESCRIPTION
MCX R/A CRIMP PLUG
(FOR RG-174/U, 188A/U, 316/U)

PART NO. 252100

DWG. NO.	REV.	SIZE	SCALE
252100.DWG	C	A	NA

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Amphenol:

68001-200HLF 86093488314745V1LF 86093968191755E3LF 67996-204HLF RJE061661210 RJSBE5080C2 65781-158 76384-316LF 86093968813H45V1LF DCMF37P 54202-G0805CLF 54202-S08-07LF 68000-236HLF 68002116HLF 95157-140LF LD15P33E4GV00LF 69192-408HLF 70218-1116LF DAPO15S365TLF 68001-108HLF 70234-112LF 86093967896755LF 86130202123355E1LF 863013A 91614-403ALF CD15S13E4RV09LF DEM09P032N 70430-164LF D15P13A6RV12LF LD25S33E4GV00LF