
ROHS

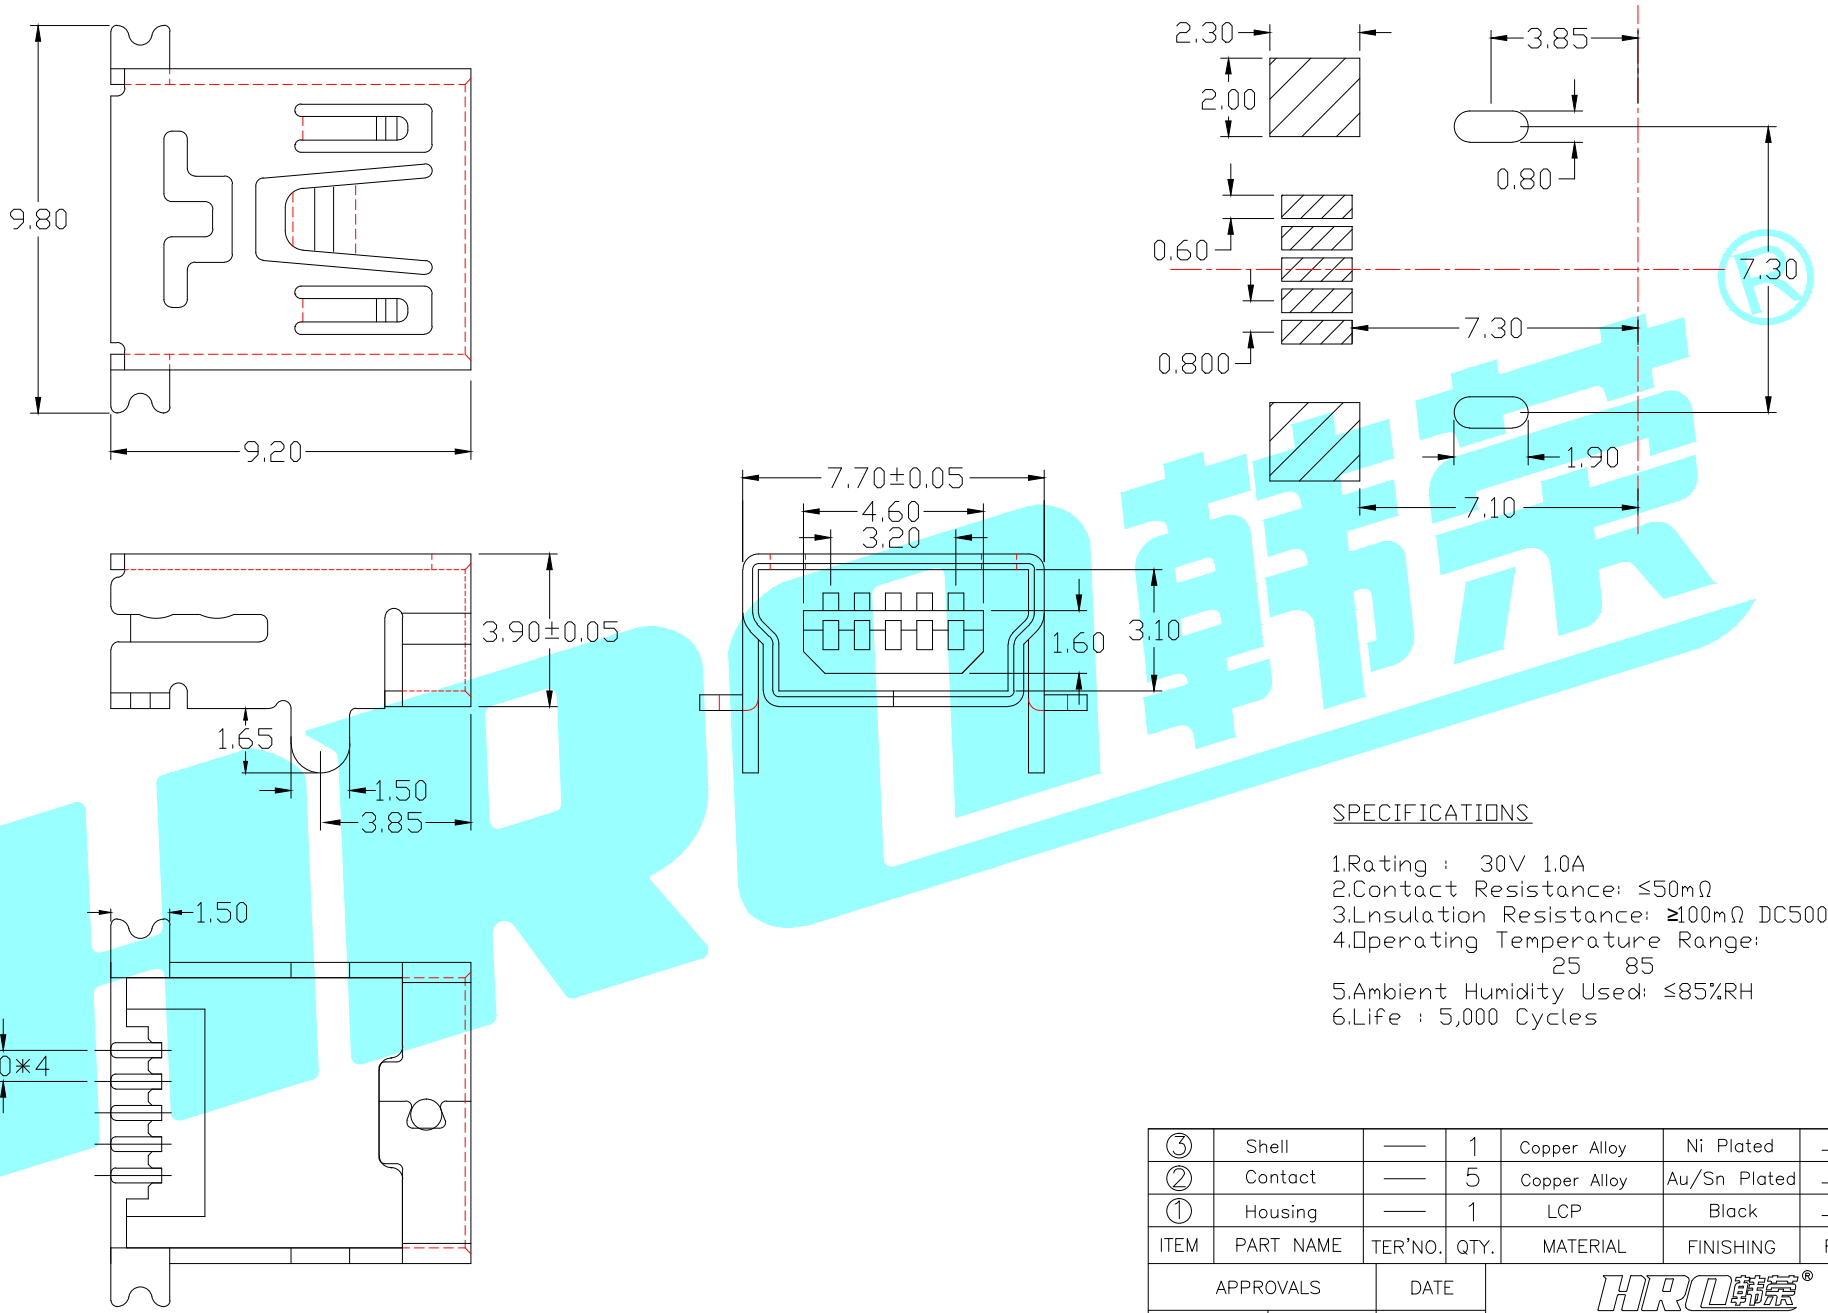

SPECIFICATIONS

1.Rating : 30V 1.0A
2.Contact Resistance: ≤50mΩ
3.Lnsulation Resistance: ≥100mΩ DC500V
4.Operating Temperature Range:
25 85
5.Ambient Humidity Used: ≤85%RH
6.Life : 5,000 Cycles

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
③	Shell	——	1	Copper Alloy	Ni Plated	——
②	Contact	——	5	Copper Alloy	Au/Sn Plated	——
①	Housing	——	1	LCP	Black	——

APPROVALS		DATE	HRO韩荣® ELECTRONICS CO.,LTD
DRAWN	LIUCAN	2021.6.8	
CHECKED			TITLE: USB CONNECTOR
APPROVALS			PART NO. U-M-M5DS-W-5
TOLERANCES ARE: 30~以上 ±0.30; 10~30 ±0.25; 5~10 ±0.20; ~ 5 ±0.15; ANGLE ±2°			UNIT: mm / SCALE: 1:1 / PROJ: / DRAWING NO. —— / SHEET 1 OF 1

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
——	A	——	NEW	——	——	——

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

HRO:

DS-01BP ES-07KP K2-1101DF-A4DW-01 K2-1818DP-A3SW-01 K8-5851D-L1 U-C-M5DW-W-1
DC-031A-10A K2-1102AT-A4CW-01 K2-1102DP-S3SW-04 K3-2258S-E1 TYPE-C-31-M-04
K2-1102DP-G4SW-04 PJ-3250-5A U-C-M5SS-Y-1 PJ-399B-6A SS-22D03-G4 U-F-M5DD-Y-L
K5-1617SA-01 U-F-M5SS-W-5 DA-10RP SIM-08A U-F-M5DD-Y-L1 DQ-03BP K2-1102SP-A5SC-04
K3-1346S-F1 U-F-M5DD-W-L U-M-M5DD-W-2 K2-1102BG-I4CW-01 K2-1102SP-K4SC-04 U-F-M5DS-Y-1